U3

Height: 32.4" Width: 34.5" Depth: 21.0" (82.3cm) (87.6cm) (53.3cm)



- · Half-batch option
- Large water tank-over 20gal
- Unique design assures extremely low evaporation loss to maintain the brew at its flavorful peak
- All stainless steel construction
- Draw off hot water during brewing cycle without affecting coffee quality
- Top mounted components for ease of service



Agency:

Specifications

Product #: 20500.6000
Water Access: Plumbed

Finish: Stainless
Funnel: Black Plastic

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	261	60°F (15.5°C)	-	-	-
*When a BUNN is	machine rated 120/208-24	40V. 120/208V or 120/2	40V, the higher voltage	is the supply voltage needed	to power the machine. The 1	20V is there to supply power	to some components rated 13	20V in the machine, but it is no	of the supply voltage

and would not power the machine is marked with the before mentioned ratings.

Plumbing Requirements


- i dinibility i to quille into										
PSI kPa		Fitting Supplied	Water Flow Required (GPM)							
20-90	138-621	3/8" Male Flare Fitting	-							

CAD Drawings

Additional Features

2D	Revit	KLC
•		



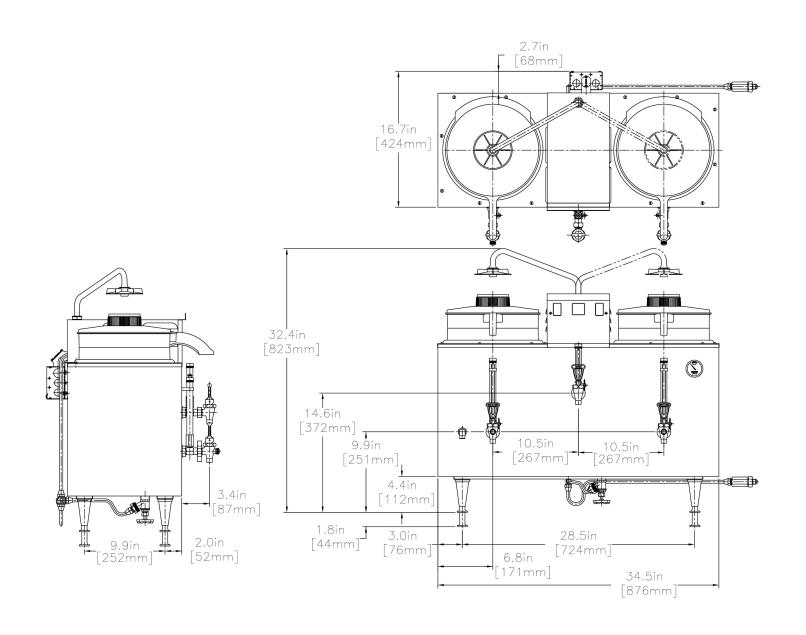

		Unit		Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	32.4 in.	34.5 in.	21.0 in.	30.7 in.	26.5 in.	36.5 in.	-	17.201 ft³	
Metric	82.3 cm	87.6 cm	53.3 cm	78.0 cm	67.4 cm	92.7 cm	-	0.487 m³	



Related Products & Accessories: U3(20500.6000)



Product #: 07284.0000





Serving & Holding Options: U3(20500.6000)







U3

Height: 32.4" Width: 34.5" Depth: 21.0" (82.3cm) (87.6cm) (53.3cm)



- · Half-batch option
- Large water tank-over 20gal
- Unique design assures extremely low evaporation loss to maintain the brew at its flavorful peak
- All stainless steel construction
- Draw off hot water during brewing cycle without affecting coffee quality
- Top mounted components for ease of service



Agency:

Specifications

Product #: 20500.6004
Water Access: Plumbed

Finish: Stainless
Funnel: Black Plastic

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	301	60°F (15.5°C)	-	-	-

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	-
	PSI 20-90		

CAD Drawings

Additional Features

2D	Revit	KLC
•		



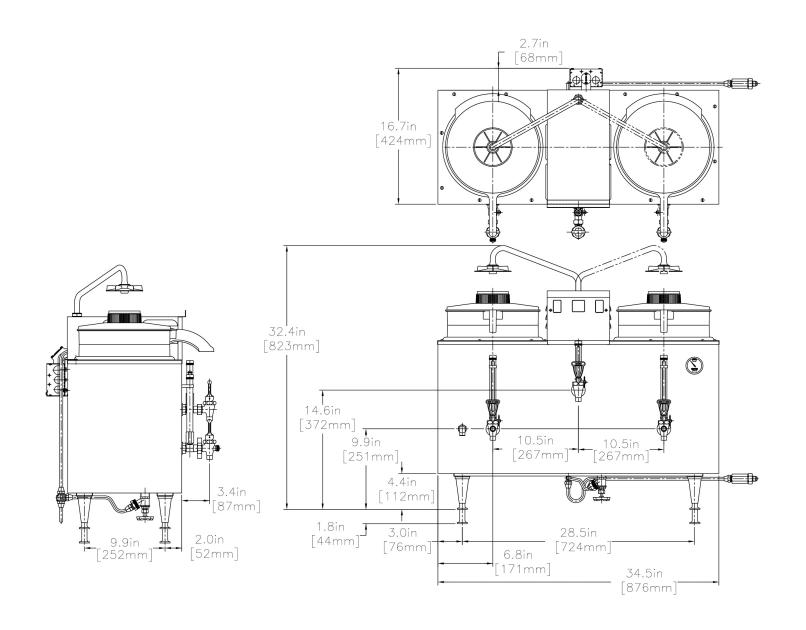

	l	Unit		Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	32.4 in.	34.5 in.	21.0 in.	-	-	-	-	-	
Metric	82.3 cm	87.6 cm	53.3 cm	-	-	-	-	-	



Related Products & Accessories:U3(20500.6004)



Product #: 07284.0000



Serving & Holding Options: U3(20500.6004)



