

# KOOL-IT

## Signature

# KSTM-27-1

## SINGLE DOOR MEGATOP PREP TABLE

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.



**Signature 40/80 Warranty**  
40 months parts and labor  
80 months on compressor (part only)

### KEY FEATURES



#### • Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA, California & Canada refrigerant & energy standards.



#### • Digital Control

Digital temperature controls and display with automatic defrost system.



#### • High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



#### • Durable, Self-contained System

Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor



#### • Expanded Pan Capacity

Designed to meet high-volume needs, megatop units offer additional topping pan storage compared to standard sandwich prep tables.



3560 NW 56th Street  
Fort Lauderdale, FL, United States 33309  
Telephone: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100

5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com




# KSTM-27-1

## SINGLE DOOR

## MEGATOP PREP TABLE

### PRODUCT VIEWS

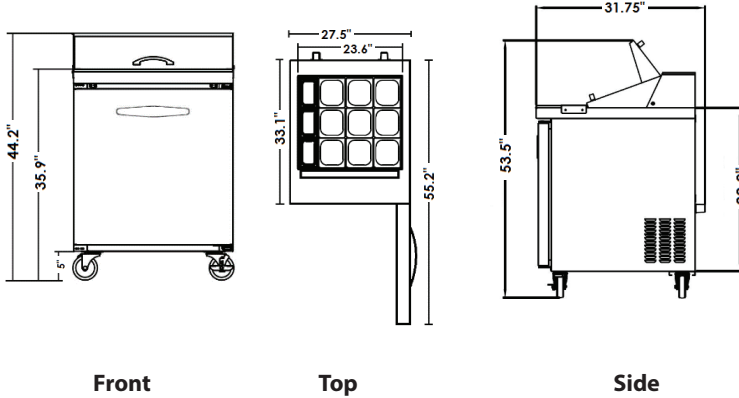

### TECHNICAL SPECIFICATIONS

Exterior Dimensions		Interior Dimensions	
W:	27.5" (699 mm)	W:	22.6" (574 mm)
D:	33.1" (841 mm)	D:	22.2" (564 mm)
H:	44.2" (1123 mm)	H:	21.4" (544 mm)

#### Interior Capacity

7 Cu Ft  
198 L

Doors	Material	Shelves	Pan Capacity (Type Included)
1	Stainless Steel	1	3 (1/9 x 4") 9 (1/6 x 4")

Exterior Material	Stainless Steel
Interior Material	Stainless Steel

### ADDITIONAL FEATURES

-  Removable, easy to clean 9.5" deep cutting board
-  Equipped with 12 4" polycarbonate food pans (can accommodate 6" pans)
-  Heavy-duty 5" castors (2 with brakes)
-  Self-closing door  
Reversible door swing (part KB-5246 required)
-  Foamed-in-place high-density CFC-free polyurethane insulation
-  Tight-sealing magnetic vinyl gaskets
-  1" thick insulated lid

### REFRIGERATION PERFORMANCE

Refrigerant	R290
Compressor Power	1/4 HP
Thermostat default setting	33°F (0.5°C) to 39°F (4°C)

### ELECTRICAL

Power Supply	115V/60Hz	Amps	4.2A
Plug Type	NEMA 5-15P		

### LOGISTICS

Unit Weight	Shipping Dimensions	
170 lb (77 kg)	W:	28.9" (734 mm)
Shipping Weight	D:	36.2" (920 mm)
	H:	44.8" (1138 mm)