VP17-1 (1 Lower Warmer)

Height: 17.8" Width: 8.0" Depth: 17.7" (45.2cm) (20.3cm) (45.0cm)



- All stainless steel construction
- Pourover brewer requires no plumbing completely portable
- SplashGard® funnel deflects hot liquids away from the hand
- Servers not included unless otherwise noted



Agency:

Specifications

oduct #: 13300.6000 Warmers: One Lower

Water Access: Not Plumbed

Finish: Black

Funnel: Black Plastic

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	61	60°F (15.5°C)	-	-	-

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

	3 - 1-		
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
-	-	-	-


CAD Drawings


Additional Features


2D	Revit	KLC
•		

MARNING:



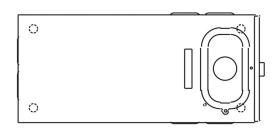

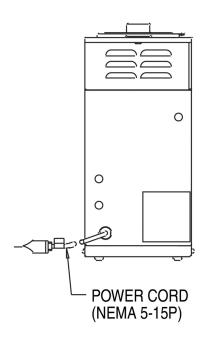

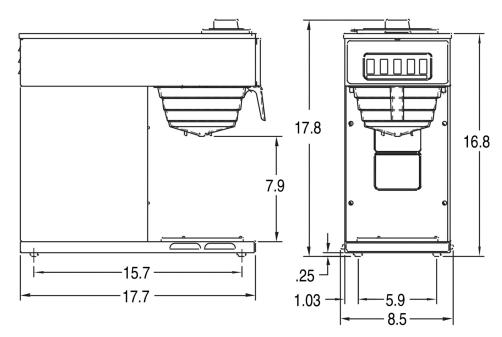

		Unit		Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	17.8 in.	8.0 in.	17.7 in.	-	-	-	-	-
Metric	45.2 cm	20.3 cm	45.0 cm	-	-	-	-	-



VP17-1 (1 Lower Warmer)

Height: 17.3" Width: 8.4" Depth: 18.8" (43.9cm) (21.3cm) (47.8cm)

- All stainless steel construction
- Pourover brewer requires no plumbing completely portable
- SplashGard® funnel deflects hot liquids away from the hand
- Servers not included unless otherwise noted

NO IMAGE AVAILABLE

Agency:

Server(s) sold separately

Specifications

ict #: 13300.6001 Warmers: One Lower

Water Access: Not Plumbed

Finish: Stainless
Funnel: Black Plastic

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	61	60°F (15.5°C)	-	-	-

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)							
-	-	-	-							


CAD Drawings 2D Revit KLC


Additional Features

MARNING:



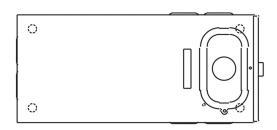

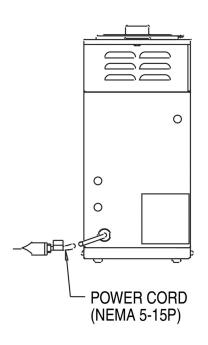

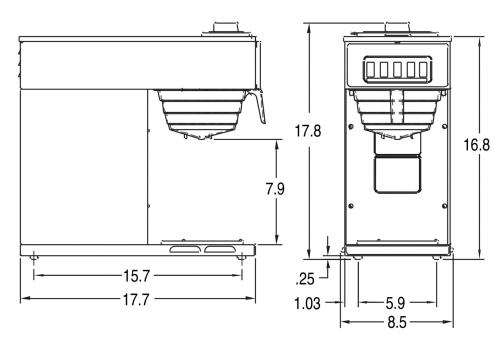

		Unit		Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	17.3 in.	8.4 in.	18.8 in.	23.8 in.	12.5 in.	26.5 in.	-	4.566 ft ³
Metric	43.9 cm	21.3 cm	47.8 cm	60.3 cm	31.8 cm	67.4 cm	-	0.129 m³

