# VP17-3 (3 Lower Warmers)

Height: 19.0" Width: 8.4" Depth: 18.8" (48.3cm) (21.3cm) (47.8cm)

- Pourover brewer requires no plumbing completely portable
- SplashGard® funnel deflects hot liquids away from the hand
- Three individually controlled warmers
- Servers not included unless otherwise noted



Agency:

Server(s) sold separately

## **Specifications**

oduct #: 13300.6004 Warmers: Three Lower

Water Access: Not Plumbed

Finish: Black

Funnel: Black Plastic

### **Electrical & Capacity**

			,						
Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	61	60°F (15.5°C)	-	-	-

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements

r lambing requirements									
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)						
-	-	-	-						


## CAD Drawings

**Additional Features** 

2D	Revit	KLC
•		

MARNING:



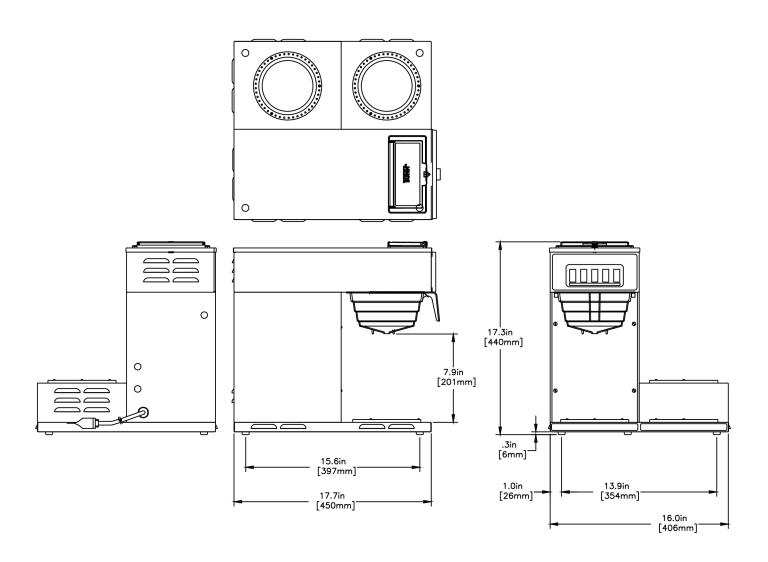

		Unit		Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	19.0 in.	8.4 in.	18.8 in.	23.8 in.	12.5 in.	26.5 in.	-	4.566 ft <sup>3</sup>	
Metric	48.3 cm	21.3 cm	47.8 cm	60.3 cm	31.8 cm	67.4 cm	-	0.129 m³	



# VP17-3 (3 Lower Warmers)

Height: 17.8" Width: 16.4" Depth: 17.7" (45.2cm) (41.7cm) (45.0cm)

- Pourover brewer requires no plumbing completely portable
- SplashGard® funnel deflects hot liquids away from the hand
- Three individually controlled warmers
- Servers not included unless otherwise noted



Agency:

Server(s) sold separately

## **Specifications**

roduct #: 13300.6005 Warmers: Three Lower

Water Access: Not Plumbed

Finish: Stainless
Funnel: Black Plastic

### **Electrical & Capacity**

			,						
Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
-	-	-	-	-	61	60°F (15.5°C)	-	-	-

\*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)							
-	-	-	-							


### **CAD Drawings**

**Additional Features** 

2D	Revit	KLC
•		

**MARNING**:



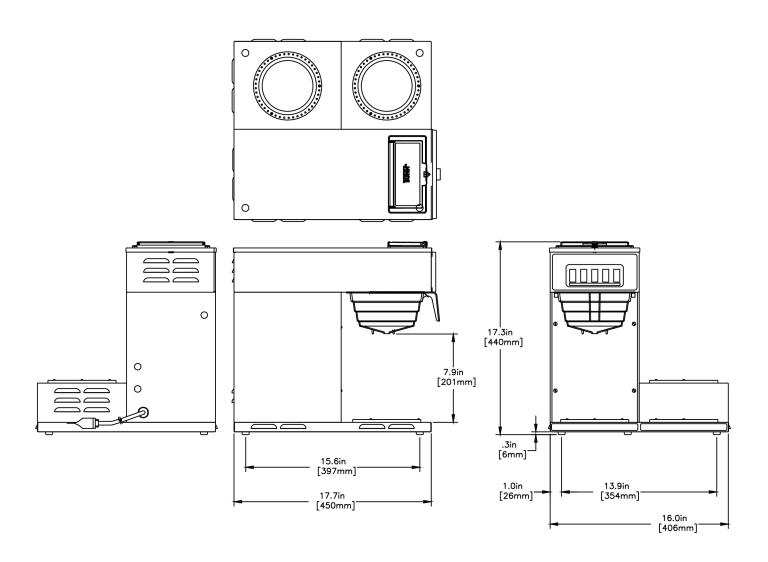

	I	Unit				Shipping		
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	17.8 in.	16.4 in.	17.7 in.	-	-	-	-	-
Metric	45.2 cm	41.7 cm	45.0 cm	-	-	-	-	-

