

Fast and energy saving

TDR 5 Programmable eco



The Turbo Deli Rotisserie is the fastest original rotisserie in the industry. The TDR's cavity is fed with air, cooking a rotisserie chicken as it is meant to be: crispy and delicious while maintaining an attractive appearance for hours.

The TDR pushes the air throughout the cavity, resulting in an improved heat transfer on the products and consequently in a reduced electricity consumption during the preparation process.

Thanks to eco-cooking the TDR saves 5% additional energy. Add to this the improved heat transfer on the products and a fast preparation process and you have yourself the most energy-efficient rotisserie with a high output.

The Cook Correction Technology corrects alterations in the cooking cycle that are due to half-loads, overloads, or products with a difference in temperature. It measures abnormalities in the temperature curve and corrects the cycle automatically, ensuring food-safety and energy-efficient cooking.

Features TDR 5 Programmable

Top features

- Controls with programmable settings
- 99 programs with up to 3 cook stages per program
- Efficient heat transfer reduces energy consumption
- Cook correction technology to control food safety
- Eco-cooking, saves on energy consumption

Standard characteristics

- 5 Meat fork, V-spit, basket or rack positions
- Rotor for up to 20 chicken (2.6 lbs) per batch
- USB connection for easy transfer of data and programs
- Boost functionality to add extra time
- Outstanding food quality: high-speed convection for even cooking
- Outstanding food quality: radiant heat for uniform browning
- Striking cooking theatre due to large glass surface and brilliant lighting
- Safety stop when opening the door
- Double glass doors, safe to touch
- No water and drain connections needed
- Matching stand on casters

Accessories

- Meat forks
- Multi-purpose baskets
- V-spits and chicken racks

Optional

- Double stacked unit
- Ventless hood



Programmable controls



Eco-cooking






Ventless hood (optional)






Matching stand on casters

TDR 5

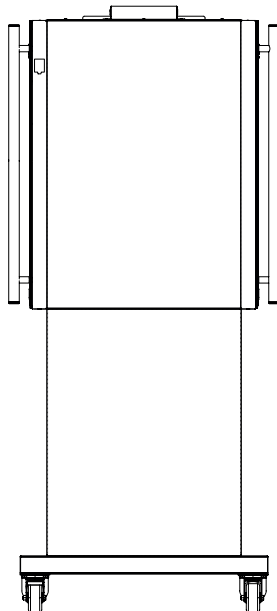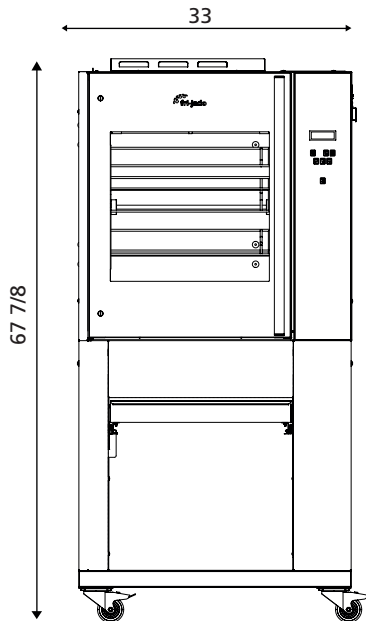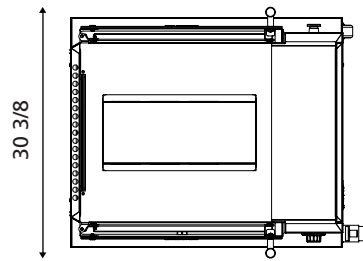

TDR 5+5

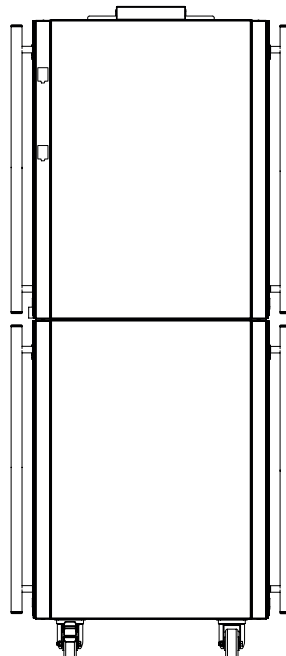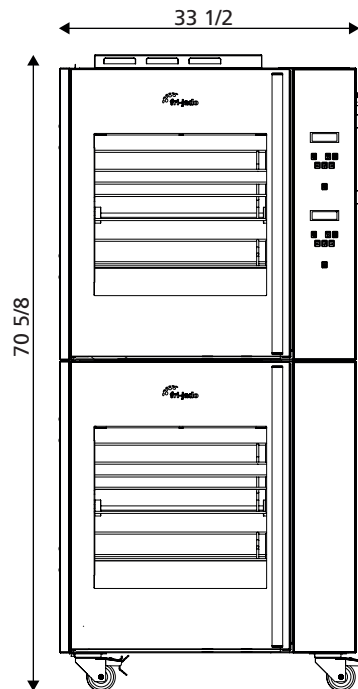

TDR 5 Programmable

- 1 Power cable, 75"
- 2 Exhaust opening
- 3 Space to the wall
- 4 Location for socket

Dimensions TDR 5

Width	33"
Depth	30 3/8"
Height on stand	67 7/8"

Technical data TDR 5

Net weight	287 lbs
Gross weight	353 lbs
Voltage	208 V
Phase	3~
Frequency	50/60 Hz
Power	6.6 kW
Plug	NEMA 15-30P

Dimensions TDR 5+5

Width	33"
Depth	30 3/8"
Height	70 5/8"

Technical data TDR 5+5

Net weight	586 lbs
Gross weight	661 lbs
Voltage	208 V
Phase	3~
Frequency	60 Hz
Power	6.6 kW (2x)
Plug	NEMA 15-30P (2x)

Specifications and technical data are subject to amendment without prior notice.

These are basic drawings. For more detailed technical information, please refer to the installation manual at www.frijado.com.



Fri-Jado Inc.
 1401 Davey Road
 Suite 100
 Woodridge IL 60517
 Toll free 877-374-5236
 Fax 630-689-1424
 e-mail us.info@frijado.com
usa.frijado.com