

DESCRIPTIONS



Capacity: 6 x 18" x 26"



Trays insertion: Crosswise



Dimensions: 820 x 825 x H 1400 mm



Control panel: Semi Touch



Positive cycle: 22 kg
 Negative cycle: 15 kg

GAS

R404A

Climate class

Class **N**

Insulation thickness: 60 mm







Refrigerant power: 1194 W



Electric power: 922 W

CONTROL PANEL DESCRIPTION



| | |
|---|---|
|  | Blast chilling key |
|  | Deep freezing key |
|  | Hard blast chilling or Soft deep freezing key |
|  | Decrease value key |
|  | Increase value key |
|  | Start/stop key |

MANUFACTURING FEATURES




- Time or core probe control
- Internal glossy finish
- External scotch-brite finish
- 60 mm high density polyurethane foam insulation, CFC and HCFC-free
- Core probe included
- Removable grids-rack for easy cleaning
- Air condensation
- Manual defrosting
- Automatic cold holding at the end of cycle
- Temperature Range for chilling cycle is 22 kg /+3°C
- Temperature Range for freezing cycle is 15 kg /-18°C

DIMENSIONS

| | BLAST CHILLER | PACKAGE |
|----------------------|----------------------|----------------------------|
| Width | 820 mm | 850 mm |
| Depth | 825 mm | 850 mm |
| Height | 1400 mm | 1580 mm |
| Weight/volume | | 170 kg/1.14 m ³ |

POWER SUPPLY

| | |
|--------------------------------|------------------|
| Power loading | 0.922 kW |
| Cooling power | 1.194 kW |
| Max. power loading | 0.922 kW |
| Voltage | 220 V ~ 1N 60 Hz |
| Feed cable section | Cable included |
| Capacity | 6 x 18" x 26" |
| Pitch between the trays | 70 mm |

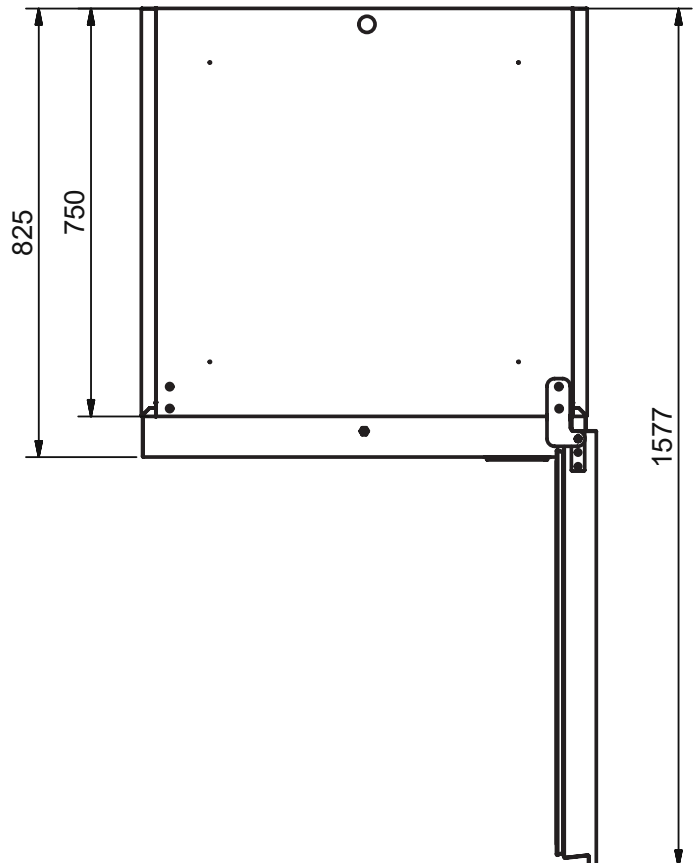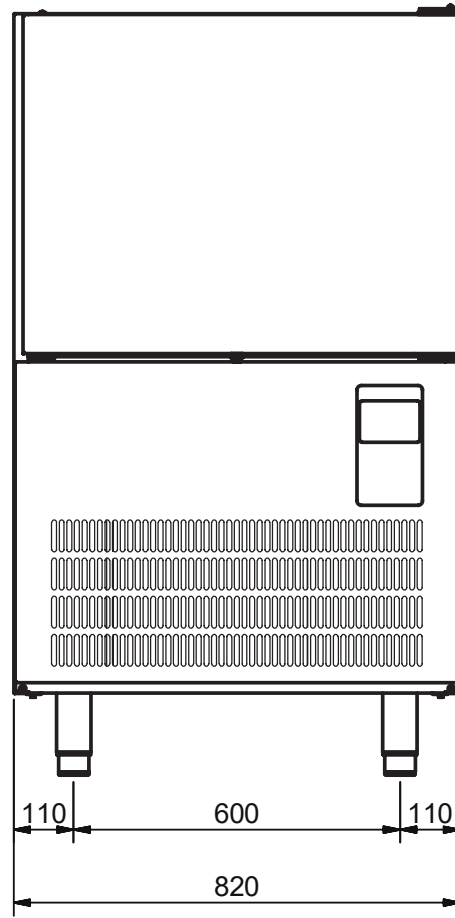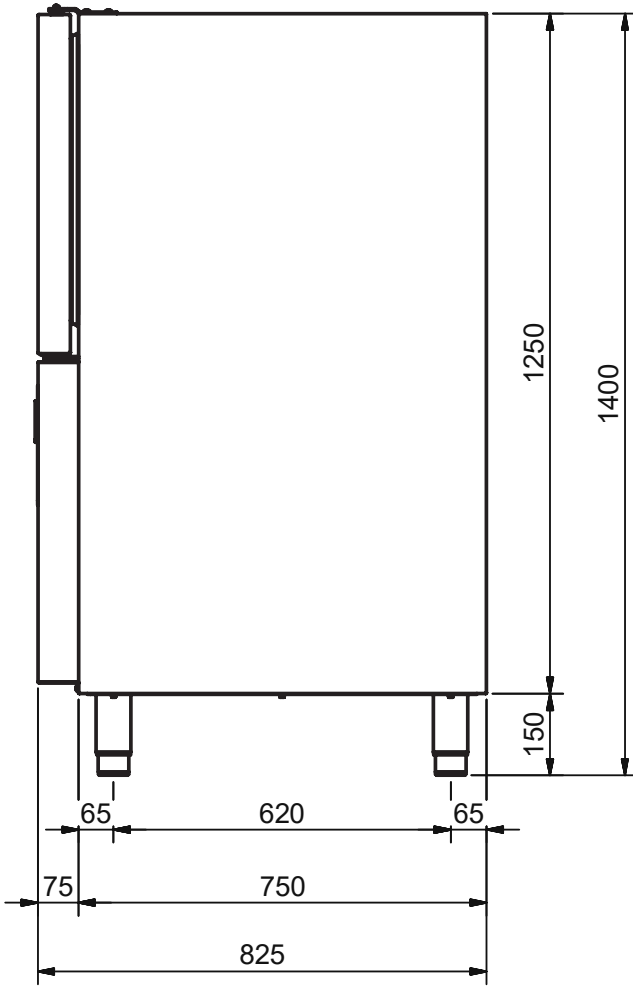

The manufacturer declines all responsibility due to errors and/or misprints.