



Simply Engineered Better

Project \_\_\_\_\_  
Item No. \_\_\_\_\_  
Quantity \_\_\_\_\_

601LTG LOW-TEMP GLASSWASHER

## 601LTG

Undercounter Low Temperature Glasswasher



### STANDARD FEATURES

- Back saving, practical, 22-1/2" [572] loading height
- Soft Start, protects glasses and mugs from chipping and breaking
- Industry exclusive, deep drawn, type 316 stainless steel tank
- 12-1/8" [308] door opening, ideal for racked glasses
- "Vari-cycle" button allows unlimited number of user selectable cycle times
- Fill and drain type operation. Rinse water is always re-used as next cycle's wash water
- Delime feature allows easy deliming of wash cavity
- Auto-clean flushes tank interior at end of serving period
- Electric tank heater ( 0.75 kW )
- Microcomputer controls and digital temperature displays
- Flexible fill and drain lines
- Flow regulator/line strainer- no PRV required
- Standard pumped drain for total ease of installation
- Liquid detergent, sanitizer and rinse-aid dispensing pumps complete with prime switches
- Counter- balanced door
- Advanced service diagnostics
- Two 20"x20" racks, one peg, one flat

### SPECIFIER STATEMENT

Glasswasher will be Moyer Diebel model 601LTG low temperature undercounter glasswasher, complete with 1 Hp pump motor, soft start feature, all stainless steel frame and fill and drain type operation. Wash tank to be stainless steel type 316.  
1 year parts and labor warranty.

### OPTIONS & ACCESSORIES

- |   |               |
|---|---------------|
| <input type="checkbox"/> 1" roller casters                              | P/N 0712480-1 |
| <input type="checkbox"/> Flat bottom dishrack                           | P/N 101273    |
| <input type="checkbox"/> Peg dishrack                                   | P/N 101285    |
| <input type="checkbox"/> 17RS - 17" Stand                               | P/N 0708757   |
| <input type="checkbox"/> 4" stand converts to a standard counter height |               |



### Moyer Diebel Ltd. - Canada

2674 North Service Rd., Jordan Station, Ontario, Canada L0R 1S0 Tel: 800/263-5798 Fax: 905/562-5422  
sales@moyerdiebellimited.com  
www.championindustries.com/1canada




Simply Engineered Better

# 601LTG

Undercounter Low Temperature  
Glasswasher

Dimensions shown in inches and [millimeters]

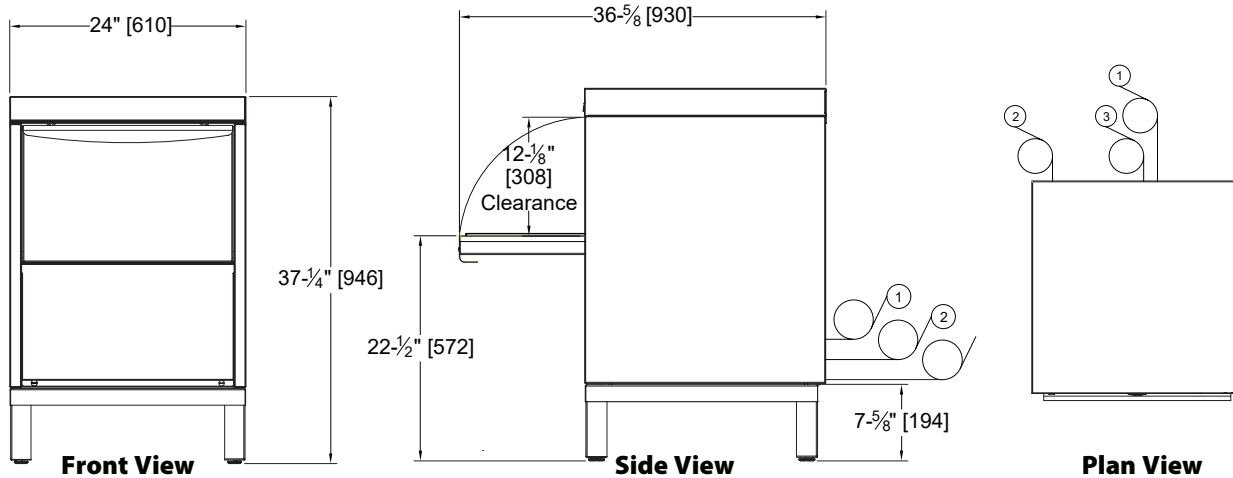

\*Note: Allow additional 3" clearance from wall.

Utilities	
<b>1 Electrical Connection</b>	115/60/1; 12 amp draw; to be fused at 15 amp. 4ft. plug-in cord supplied.
<b>2 Water Connection</b>	140 °F Min., 1/2" supply hot water connection 6 ft. long, 1/2" I.D. flexible fill hose with 3/4" hose connector Flow pressure: 25-95 psi
<b>3 Drain Connection</b>	6 ft. long, 5/8" I.D. flexible drain hose Max. drain flow: 15 USG PM

	Uncrated	Crated
<b>Height*</b>	37-1/4"	39-1/2"
<b>Width</b>	24"	25"
<b>Depth</b>	25"	25-1/2"
<b>Ship Wt. lbs</b>	178	198

\* Front leveling feet provided.

Due to an ongoing value analysis program at Moyer Diebel, specifications in this catalog are subject to change without notice.

SPECIFICATIONS	
<b>Capacity</b>	Racks per hr. 25
<b>Motor Horsepower</b>	Wash 1
<b>Water Consumption</b>	Imp. gal./liters per hr. (max. use) 28.4/129 Imp. gal./liters per rack 1.35/6.1
<b>Temperatures °F/°C</b>	Wash (minimum) 140°/60° Rinse (minimum) 140°/60°
<b>Heating</b>	Tank heat, electric (kW) .75
<b>Time Cycle in Seconds</b>	Wash 90 Rinse 26 Drain/fill 25 Total 141

\* Excludes 30 second NSF load/unload time

**Warning:** Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes.

