



MODELS

KGH-OF-(30, 40, 50, 60, 80, 100)-S

KGH-OF-(30, 40, 50, 60, 80, 100)-R

**GRAB-N-GO
HIGH PROFILE CASE**

CASE HOLDS 36°F TO 40°F • FORCED AIR REFRIGERATION • OPEN FRONT
FRONT LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES
PULL DOWN NIGHT CURTAIN • CASES CAN BE MULTIPLEXED



Intertek




Intertek



AUTODESK®
REVIT®

SELF CONTAINED	Model	Width (inches)	Capacity Cu.ft	Electrical				Nema Plug	Weight lbs		Crate Size (inches)		
				Compressor		Total Amps 115 V	Total Amps 230 V		No Crate	With Crate	L"	W"	H"
				H.P	F.L.A 115V								
	KGH-OF-30-S	29.2	15.9	3/4	16.0	20.7	N/A	Hard-wired	408	542	32.2	32.5	85.4
	KGH-OF-40-S	41	23.3	1	16.2	26.3	N/A	Hard-wired	463	633	44	32.5	85.4
	KGH-OF-50-S	50.2	29.1	1	16.2	27.0	N/A	Hard-wired	514	728	53.2	32.5	85.4
	KGH-OF-60-S	60.6	35.6	1-1/4	N/A	10.8	9.2	Hard-wired	580	818	63.6	32.5	85.4
	KGH-OF-80-S	78.2	46.6	2 x 1	N/A	11.2	16.4	Hard-wired	752	1049	81.2	32.5	85.4
	KGH-OF-100-S	96.6	58.2	2 x 1	2 x 16.2	2 x 27	N/A	Hard-wired	939	1285	99.6	32.5	85.4

REMOTE	Model	Width (inches)	115 Volts Total Amps	B.T.U	Nema Plug	Weight lbs	
						No Crate	With Crate
						KGH-OF-30-R	29.2
KGH-OF-40-R	41	0.90	6940	Hard-wired	353	523	
KGH-OF-50-R	50.2	1.30	7565	Hard-wired	404	617	
KGH-OF-60-R	60.6	1.36	9383	Hard-wired	463	701	
KGH-OF-80-R	78.2	1.81	13881	Hard-wired	562	860	
KGH-OF-100-R	96.6	2.60	14921	Hard-wired	691	1043	

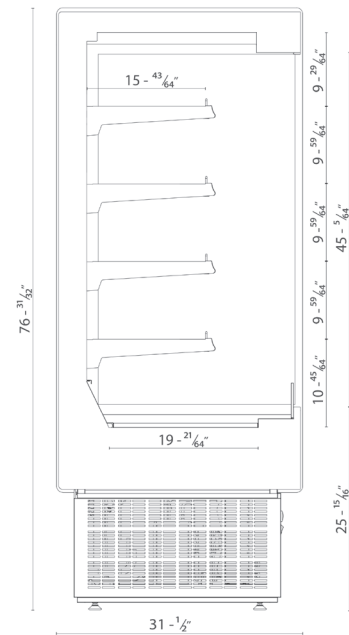

STANDARD FEATURES

- Tempered side glass
- Pull down night curtain
- CFC free injected foam insulation
- Silver colored PVC coated steel front panel
- PVC coated steel gray interior
- Black steel kick plate
- Foamed polystyrene black end panels
- Height adjustable shelves can be tilted
- Products stop on all shelves
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporating pan for easy cleaning on self contained units
- Slide out condensing unit on self-contained units
- Digital thermometer
- Levelling feet

OPTIONAL FEATURES

- Stainless steel interior and / or exterior
- Other colors available
- Solid or full view end panels
- Additional shelves
- Joining Kit
- Partition and or / product dividers
- Price tag molding
- Condensate evaporating pan for remote cases
- Casters add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 or 8.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

Tel: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100

Tel: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / toll free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com



MODELS

KGH-ES-(30, 40, 50, 60, 80,100)-S

GRAB-N-GO HIGH PROFILE CASE WITH ELECTRIC SHUTTER

CASE HOLDS 36°F TO 40°F • KEY OPERATED ELECTRIC LOCKING SHUTTER
FORCED AIR REFRIGERATION • OPEN FRONT
FRONT LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES



AUTODESK®
REVIT®


SELF CONTAINED	Model	Width (inches)	Capacity FT ³	Electrical					Weight lbs		Crate Size (inches)		
				Compressor			Total Amps 115V	Total Amps 230 V	Net Weight	Ship Weight	L"	W"	H"
				H.P	F.L.A 115V	F.L.A 230V							
	KGH-ES-30-S	29.2	15.9	3/4	16.0	N/A	20.7	N/A	417	527	32	32.5	92
	KGH-ES-40-S	41	23.3	1	16.2	N/A	26.3	N/A	509	653	44	32.5	92
	KGH-ES-50-S	50.2	29.1	1	16.2	N/A	27.0	N/A	564	736	53	32.5	92
	KGH-ES-60-S	60.6	35.6	1-1/4	N/A	9.2	10.8	9.2	666	842	64	32.5	92
	KGH-ES-80-S	78.2	46.6	2 x 1	N/A	2 x 8.2	11.2	16.4	811	1062	82	32.5	92
	KGH-ES-100-S	96.6	58.2	2 x 1	2 x 16.2	N/A	2 x 27	N/A	1047	1444	99.6	32.5	92

STANDARD FEATURES

- Key operated electric shutter
- Tempered side glass
- CFC free injected foam insulation
- Silver colored PVC coated steel front panel
- PVC coated steel gray interior
- PVC coated dark gray anthracite kick plate
- Foamed PVC coated steel black end panels
- Height adjustable shelves can be tilted
- Products stop on all shelves
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporating pan for easy cleaning
- Slide out condensing unit
- Digital thermometer
- Levelling feet

OPTIONAL FEATURES

- Stainless steel interior and / or exterior
- Other colors available
- Solid or full view end panels
- Additional shelves
- Partition and or / product dividers
- Price tag molding
- Casters add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

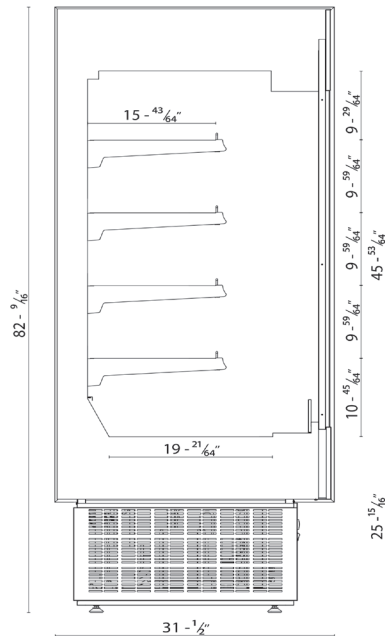

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient).

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)



Tel: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / toll free: 877.453.8832

