



DISHWASHER

SERVING THE FOOD INDUSTRY SINCE 1951

UPRIGHT KROMO DISHWASHER HEAVY DUTY

Item: 49128 | Model: CD-IT-130-HDPREMIUM



THE EVOLUTION OF TRADITION

Dishwashing machine built with fully double insulated hood, completely deep-formed, designed for being silent and reliable.

FEATURES

- Double insulated hood
- 5 wash cycles
- Three-phase machine
- Wash and rinse temperatures displayed
- Built-in rinse-aid dispenser
- Split wash and rinse arms
- Deep-formed tank
- Self-cleaning vertical pump
- Standard drain pump
- Break Tank system to prevent backflow contaminations in the piping network
- User-friendly multichromatic START key
- Electronic control panel with LCD screen
- Language selection and menu personalization
- Self-diagnostic system for users and service staff
- PLUS SYSTEM to grant a constant rinse temperature and pressure

OPTIONS

- Detergent dispenser



WARRANTY

PARTS AND LABOR




Must be installed by a certified electrician.



Authorized Dealer

TECHNICAL DRAWING

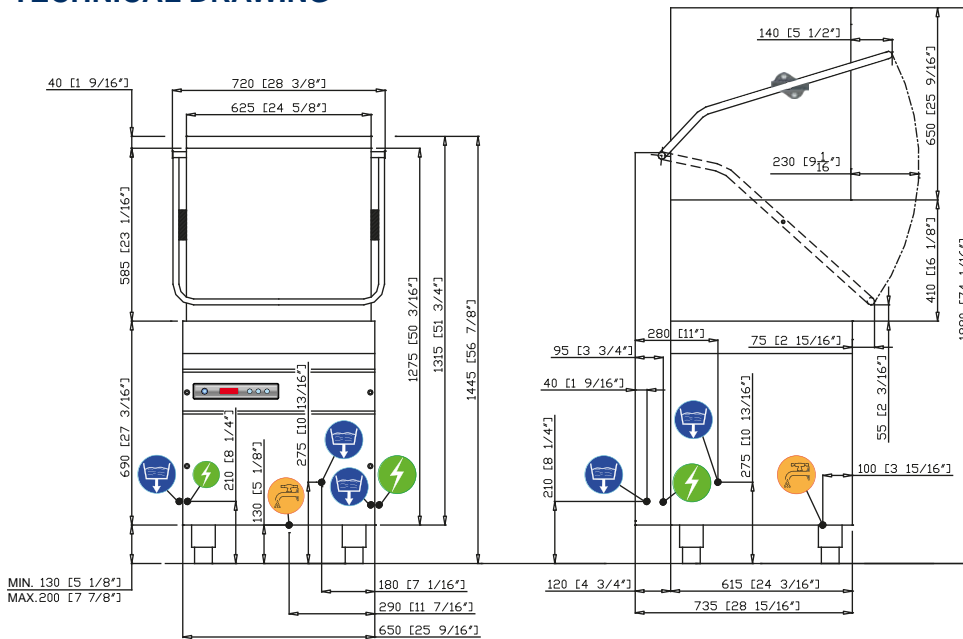

	WATER CONNECTION 3/4" G
	DRAINING 15/16 inch
	ELECTRICAL SUPPLY

BARE WIRE Must be installed by a certified electrician.

TECHNICAL SPECIFICATIONS

ITEM	49128	DIMENSIONS (WDH)	28 3/8" x 28 15/16" x 56 7/8" 74 1/16" Height (open hood)
MODEL	CD-IT-130-HDPREMIUM	WEIGHT	253.5 lbs
CROCKERY DIMENSIONS	PLATES: 16 1/8" dia TRAY MAX: Gastronorm 1/1 (20 7/8" x 12 3/4")	WATER CONSUMPTION / CYCLE (water pressure 200kPa)	0.69 gal
RACK DIMENSIONS	20" x 20"	BOOSTER CAPACITY	3.96 gal
RACK EQUIPMENT	(2) PLASTIC PLATES BASKET (1) LARGE MESH GLASS BASKET (2) CUTLERY BASKET	BOOSTER HEATING ELEMENT	9 kW
ELECTRICAL	220-240V / 60Hz / 3Ph	RINSING TEMPERATURE (SET)	185°F
POWER REQUIRED	10.75 kW	TANK CAPACITY	11.1 gal
WATER HARDNESS	2-8 °F	TANK HEATING ELEMENT	2.7 kW
INLET WATER PRESSURE	25 - 95 PSI (170-620 kPa)	TANK TEMPERATURE (SET)	160°F
WASHING CYCLES (sec)	1 (120) 2 (180) 3 (240) 4 (300) 5 (360)	PUMP POWER	1.75 kW
WATER SUPPLY 131 °F RACKS/H (*) (°)	30 20 15 12 10	DRAIN PUMP	43W hMAX 31 1/2" (10.78 gal)
WATER SUPPLY 50 °F RACKS/H (*) (°)	20 20 15 12 10	NOISE	66,430.7 dB(A)

(*) STANDARD THERMOSTOP

(***) MAXIMUM FLOW RATE

1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



Follow us to keep up to date with the latest news and offers

