



Project:

Item Number:

Quantity:

E122/F122 COUNTERTOP SHAKE FREEZERS OR FROZEN BEVERAGE DISPENSERS



E122



F122




DESCRIPTION

Compact, space-saver machines offer the convenience to serve frozen beverages, shakes, smoothies or frozen cocktails. IntelliTec2™ control communicates with the operator through a multi-line graphics LCD using full text instructions.

INTELLITEC2™ CONTROL FEATURES

- Programmable and configurable through multi-line graphics display.
- Upload firmware and download statistics through a USB connection.
- Performance and error logs provide data to maximize profitability.
- Senses product consistency or temperature to customize for a wide variety of mixes.
- Standby and sleep modes conserve energy and automatically defrost product, maintaining small ice crystals and delivering a superior mouthfeel.
- Tamper-proof controls for self-serve applications.



Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

ITEMS

- E122-38I2** Air cooled, single phase
- E122-38I2AF** Air cooled, single phase, autofill ready
- E122-38I2P** Air cooled, single phase, with plenum
- F122-38I2** Air cooled, single phase
- F122-38I2-AF** Air cooled, single phase, autofill ready
- F122-38I2P** Air cooled, single phase, with plenum
- F122-18I2-AF** Water cooled, single phase, autofill ready

ACCESSORIES & OPTIONS

- 2183807** E112 Autofill Ready Kit - Includes hopper cover, tubing, and solenoid. Requires autofill system
- 2187101** F112 Autofill Ready Kit - Includes hopper cover, tubing, and solenoid. Requires autofill system
- 4177349** Fill-O-Matic II Autofill System - Electric Pumps up to 60 gallons per hour
- 4177370** Fill-O-Matic III Autofill System - Gas Pumps up to 45 gallons per hour

FLOOR STANDS

- Refer to the floor stand specification sheet for more details.
- F122 - Mounted to stand - 2208358, 2203214
 - E122 - Set-on-top stand - 4177350, 4183513, 2202408, 2208358, 2203214


FEATURES

- NSF approved food grade plastic blades provide quiet operation and superior durability.
- Simplified design for quick assembly after cleaning.
- On demand defrost prevents ice buildup and ensures a smooth frozen treat with consistent quality.
- Clear door displays circulating product for merchandising appeal.
- Highly efficient auger design gently folds the entire contents of the freezing cylinder, delivering a thick, smooth, and creamy product.
- Efficient freezing cylinder and auger design deliver a consistent uniform creamy product and a quick recovery time.
- Compact counter-top design saves valuable counter space.
- Single switch for simple operation and cleaning.

Approvals	Date

E122/F122 COUNTERTOP SHAKE FREEZERS OR FROZEN BEVERAGE DISPENSERS

DIMENSIONS

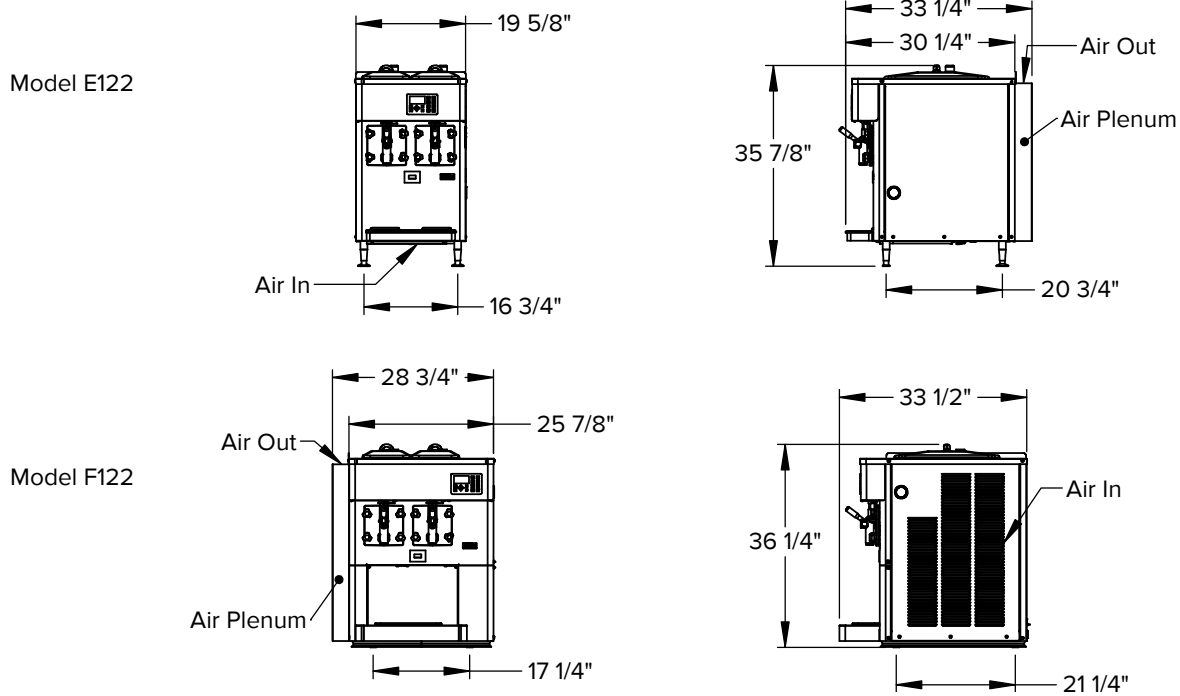

GENERAL SPECIFICATIONS

Model	Freezing Cylinder				Hopper Capacity gallon (L)	Drive Motor (hp)	Weight lb (kg)	Crated Weight lb (kg)
	Capacity gallon (L)	Compressor						
		Btu/hr	Refrigerant	Charge (oz)				
E122	Two 1.25 (4.73)	6,400	R-404A	30	Two 3 (11.36)	1/3	275 (124.7)	364 (165.1)
F122	Two 2 (7.57)	12,000	R-404A	A/C: 40 W/C: 30	Two 3 (11.36)	1/2	390 (176.9)	458 (207.7)

- Indoor use only.
- Maximum ambient temperature: 100°F (37.8°C).
- Requires a dedicated electrical circuit.
- Air cooled units require: 6" (15.24 cm) air space on both sides
- Water cooled units require: 3/8" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM per barrel. Ideal EWT of 50°-70°F.
- Details on CAD Revit Symbols Libraries are available on stoelting.klccad.com

ITEM NUMBER SPECIFICATIONS

Model Number	Cooling	Phase	Volts	Hz	Running Amps	Cord with Plug (Included)	Autofill Ready	Plenum Kit
E122-38I2	Air	1	208-240	60	10.6	NEMA 6-15P	—	—
E122-38I2AF							✓	—
E122-38I2P							—	✓
F122-38I2	Air	1	208-240	60	10.1	NEMA 6-20P	—	—
F122-38I2-AF							✓	—
F122-38I2P							—	✓
F122-18I2-AF	Water	1	208-240	60	9.1	NEMA 6-20P	✓	—



Service Information
 800-319-9549 (U.S. Toll Free)
 920-894-2293 (Outside the U.S.)
www.stoeltingfoodservice.com
www.vollrath.com