



AX-514RHD


Half Size Digital Convection Oven with Humidity
4 shelves

Specifications :

Programmable controls	time, temperature , humidity, 3 cooking cycles for each program
Load capacity	4 shelves Half Size pans
Fan(s) High Speed with reversing gear	1
Space between trays	2.95"
Power / Voltage	2800 Watts / 208-240 V / 60 Hz / Single Phase / Nema 6-15P
Temperature	86 ° - 500 °F
Equipped with	16 hour timer - signal at end of cycle
Dimension of cooking chamber	19.45 x 13.11 x 16.25 (WxHxD) - 2.40 Cubic Feet
Shipping dimensions	29.16" x 31.91" x 29.94"
Net / Ship Weight	88 lbs / 113 lbs

Features :

- Optimal airflow system
- Automatically reversing gear
- Digital programmable controls / 99 programs / pre-heating / 3 cooking cycle for each program
- High temperature motor bearings
- High speed fan
- Interior halogen light
- Includes electro valve for direct water connection
- Micro safety switch shuts oven off when door is open
- Heavy duty stainless steel body construction
- Safety "Cold door" design with double wall glass
- Reinforced door hinges
- Oven door can support a weight limit of 80 lbs
- Oven cavity is insulated with ultra-high temperature fibreglass insulation
- Dimensions are suitable to accomodate modular stacking for customized cooking set
- 2 Years Parts* & 1 Year Labor * Exceptions: 60 days on glass, gaskets and lights.

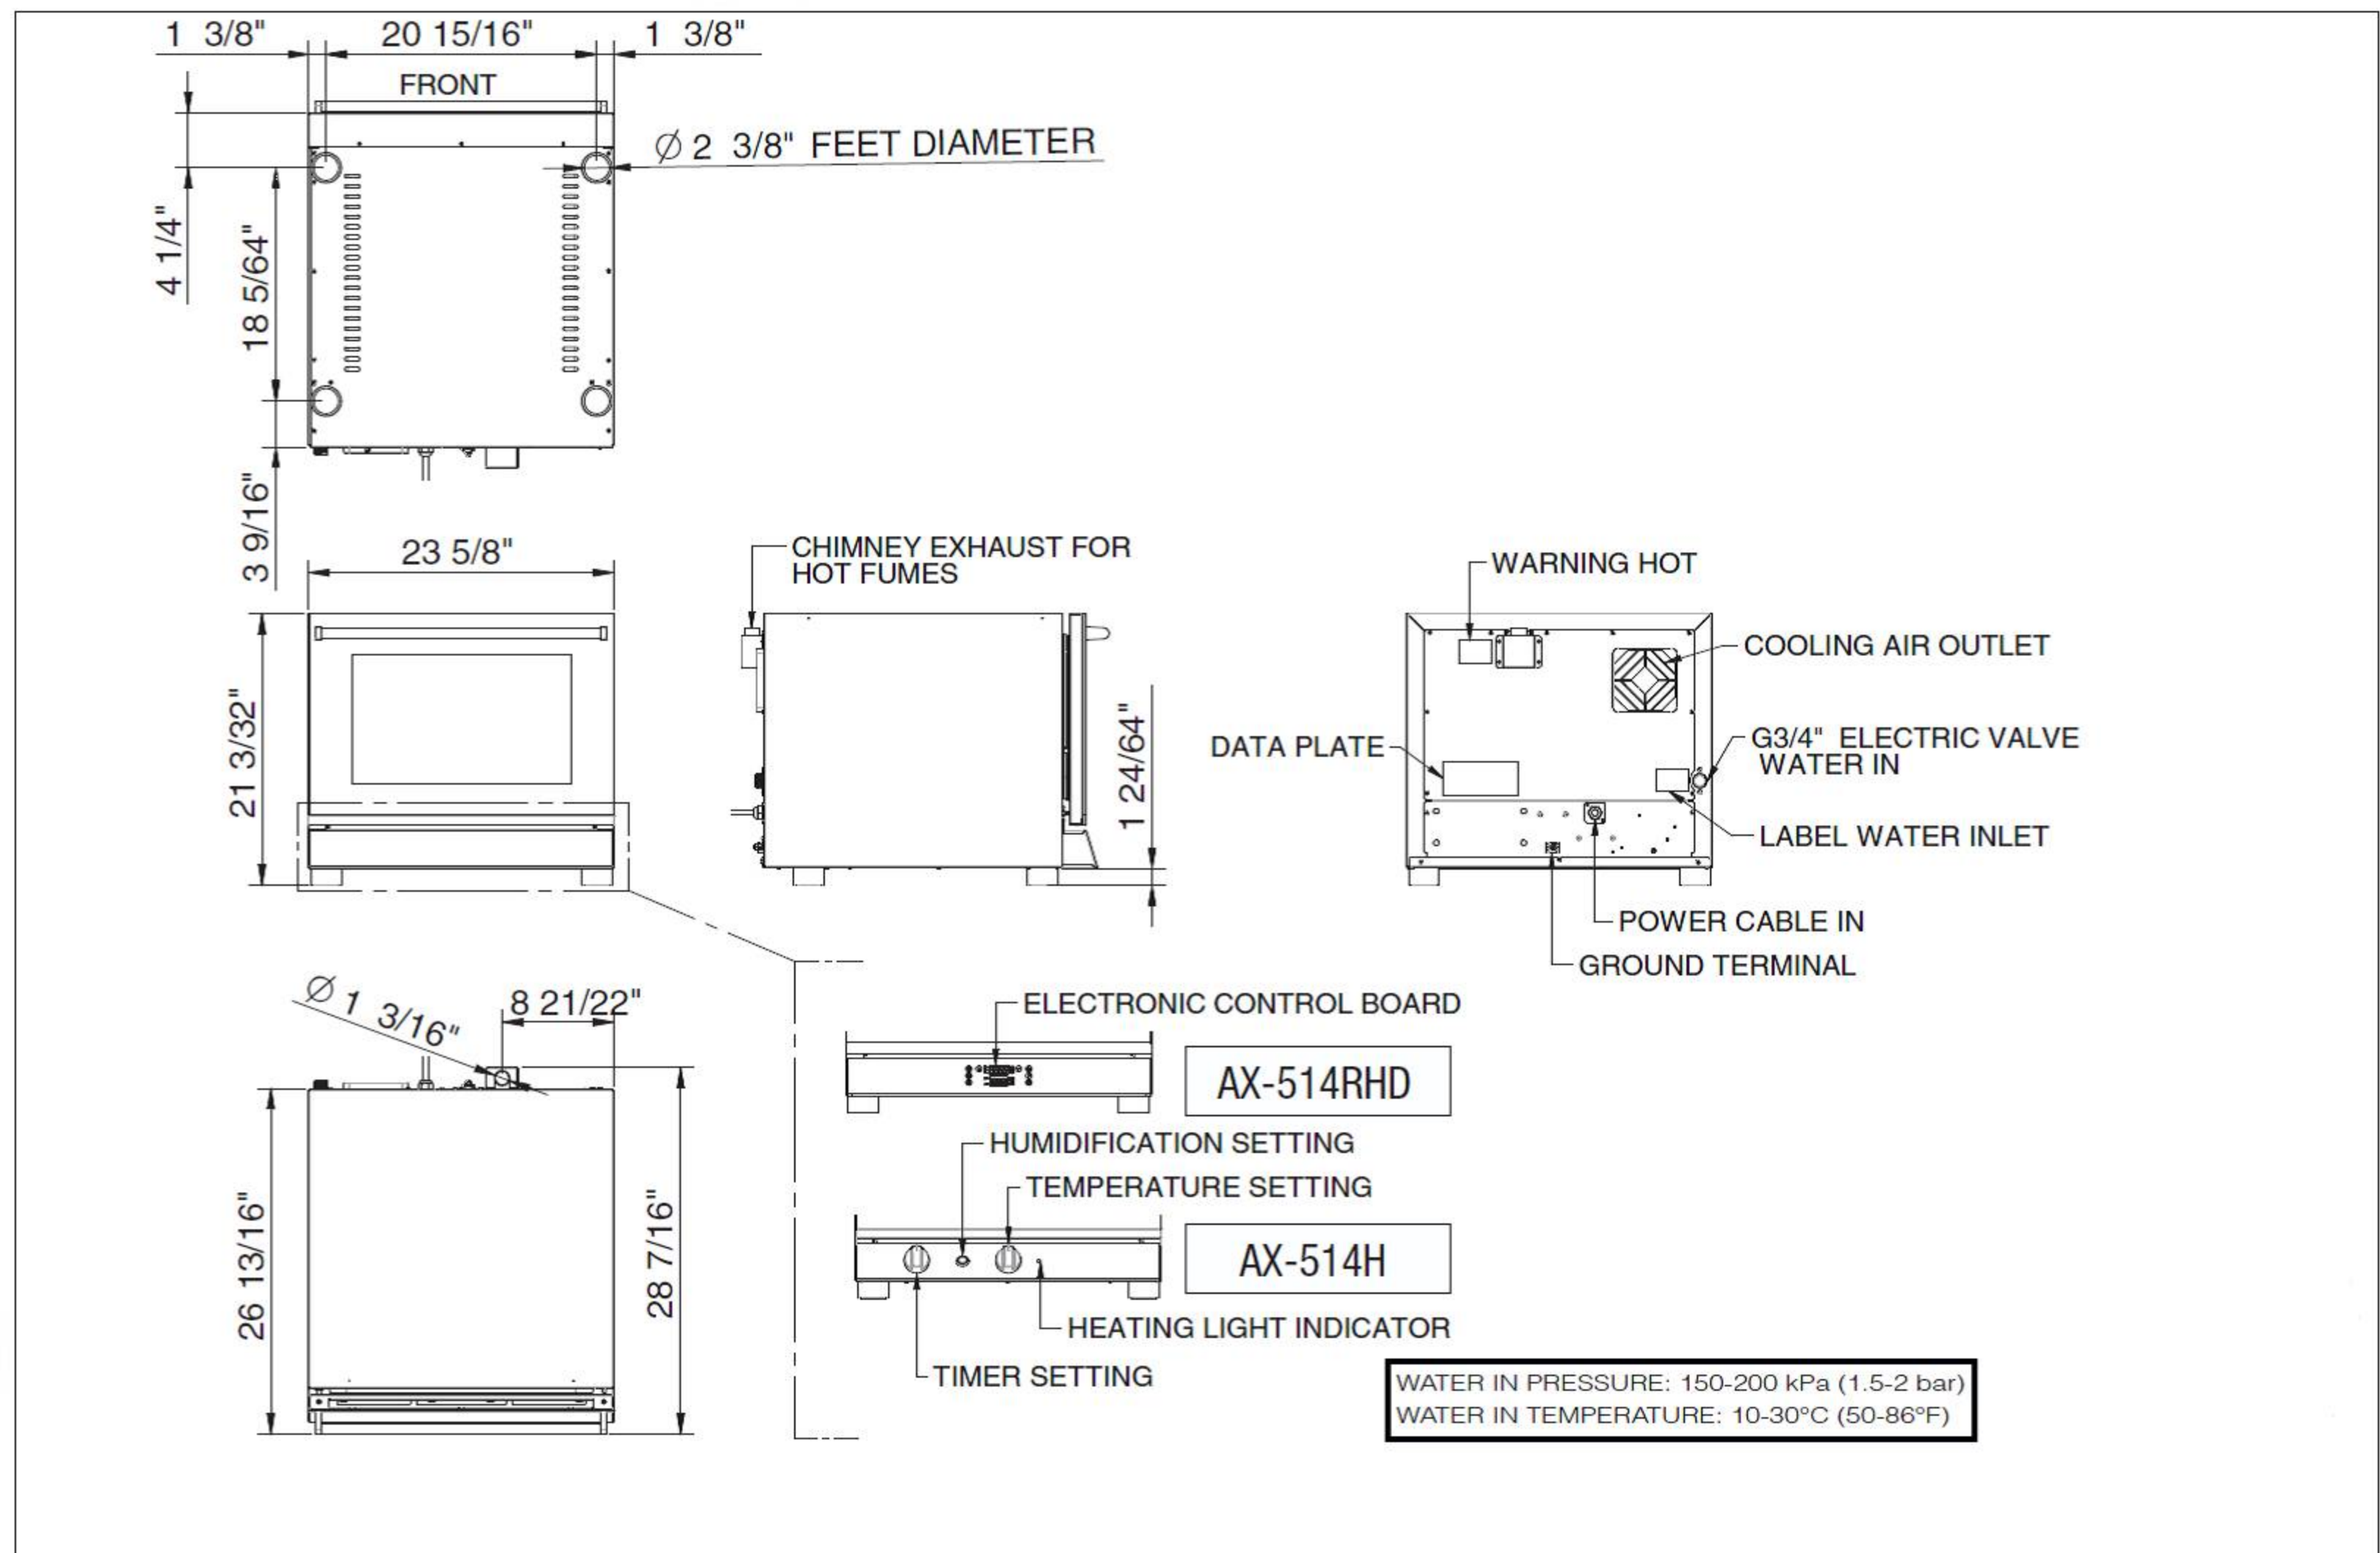




AX-514H Half Size Convection Oven with Humidity manual controls – 4 shelves

Specifications :

Manual Control knobs	time, temperature, humidity
Load capacity	4 shelves Half Size pans
Fan(s) High Speed	1
Space between trays	2.95"
Power / Voltage	2800 Watts / 208-240 V / 60 Hz / Single Phase / Nema 6-15P
Temperature	120 ° - 510 °F
Equipped with	0-120 minute timer - signal at end of cycle
Dimension of cooking chamber	19.45 x 13.11 x 16.25 (WxHxD) - 2.40 Cubic Feet
Shipping dimensions	29.16" x 31.91" x 29.94"
Net / Ship Weight	88 lbs / 113 lbs

Features :

- Optimal airflow system
 - Manual controls
 - High temperature motor bearings
 - High speed fan
 - Interior halogen light
 - Includes electro valve for direct water connection
 - Heavy duty stainless steel body construction
 - Micro safety switch shuts oven off when door is open
 - Safety "Cold door" design with double wall glass
 - Reinforced door hinges
 - Oven door can support a weight limit of 80 lbs
 - Oven cavity is insulated with ultra-high temperature fibreglass insulation
 - Dimensions are suitable to accommodate modular stacking for customized cooking set
 - 2 Years Parts* & 1 Year Labor
- * Exceptions: 60 days on glass, gaskets and lights.

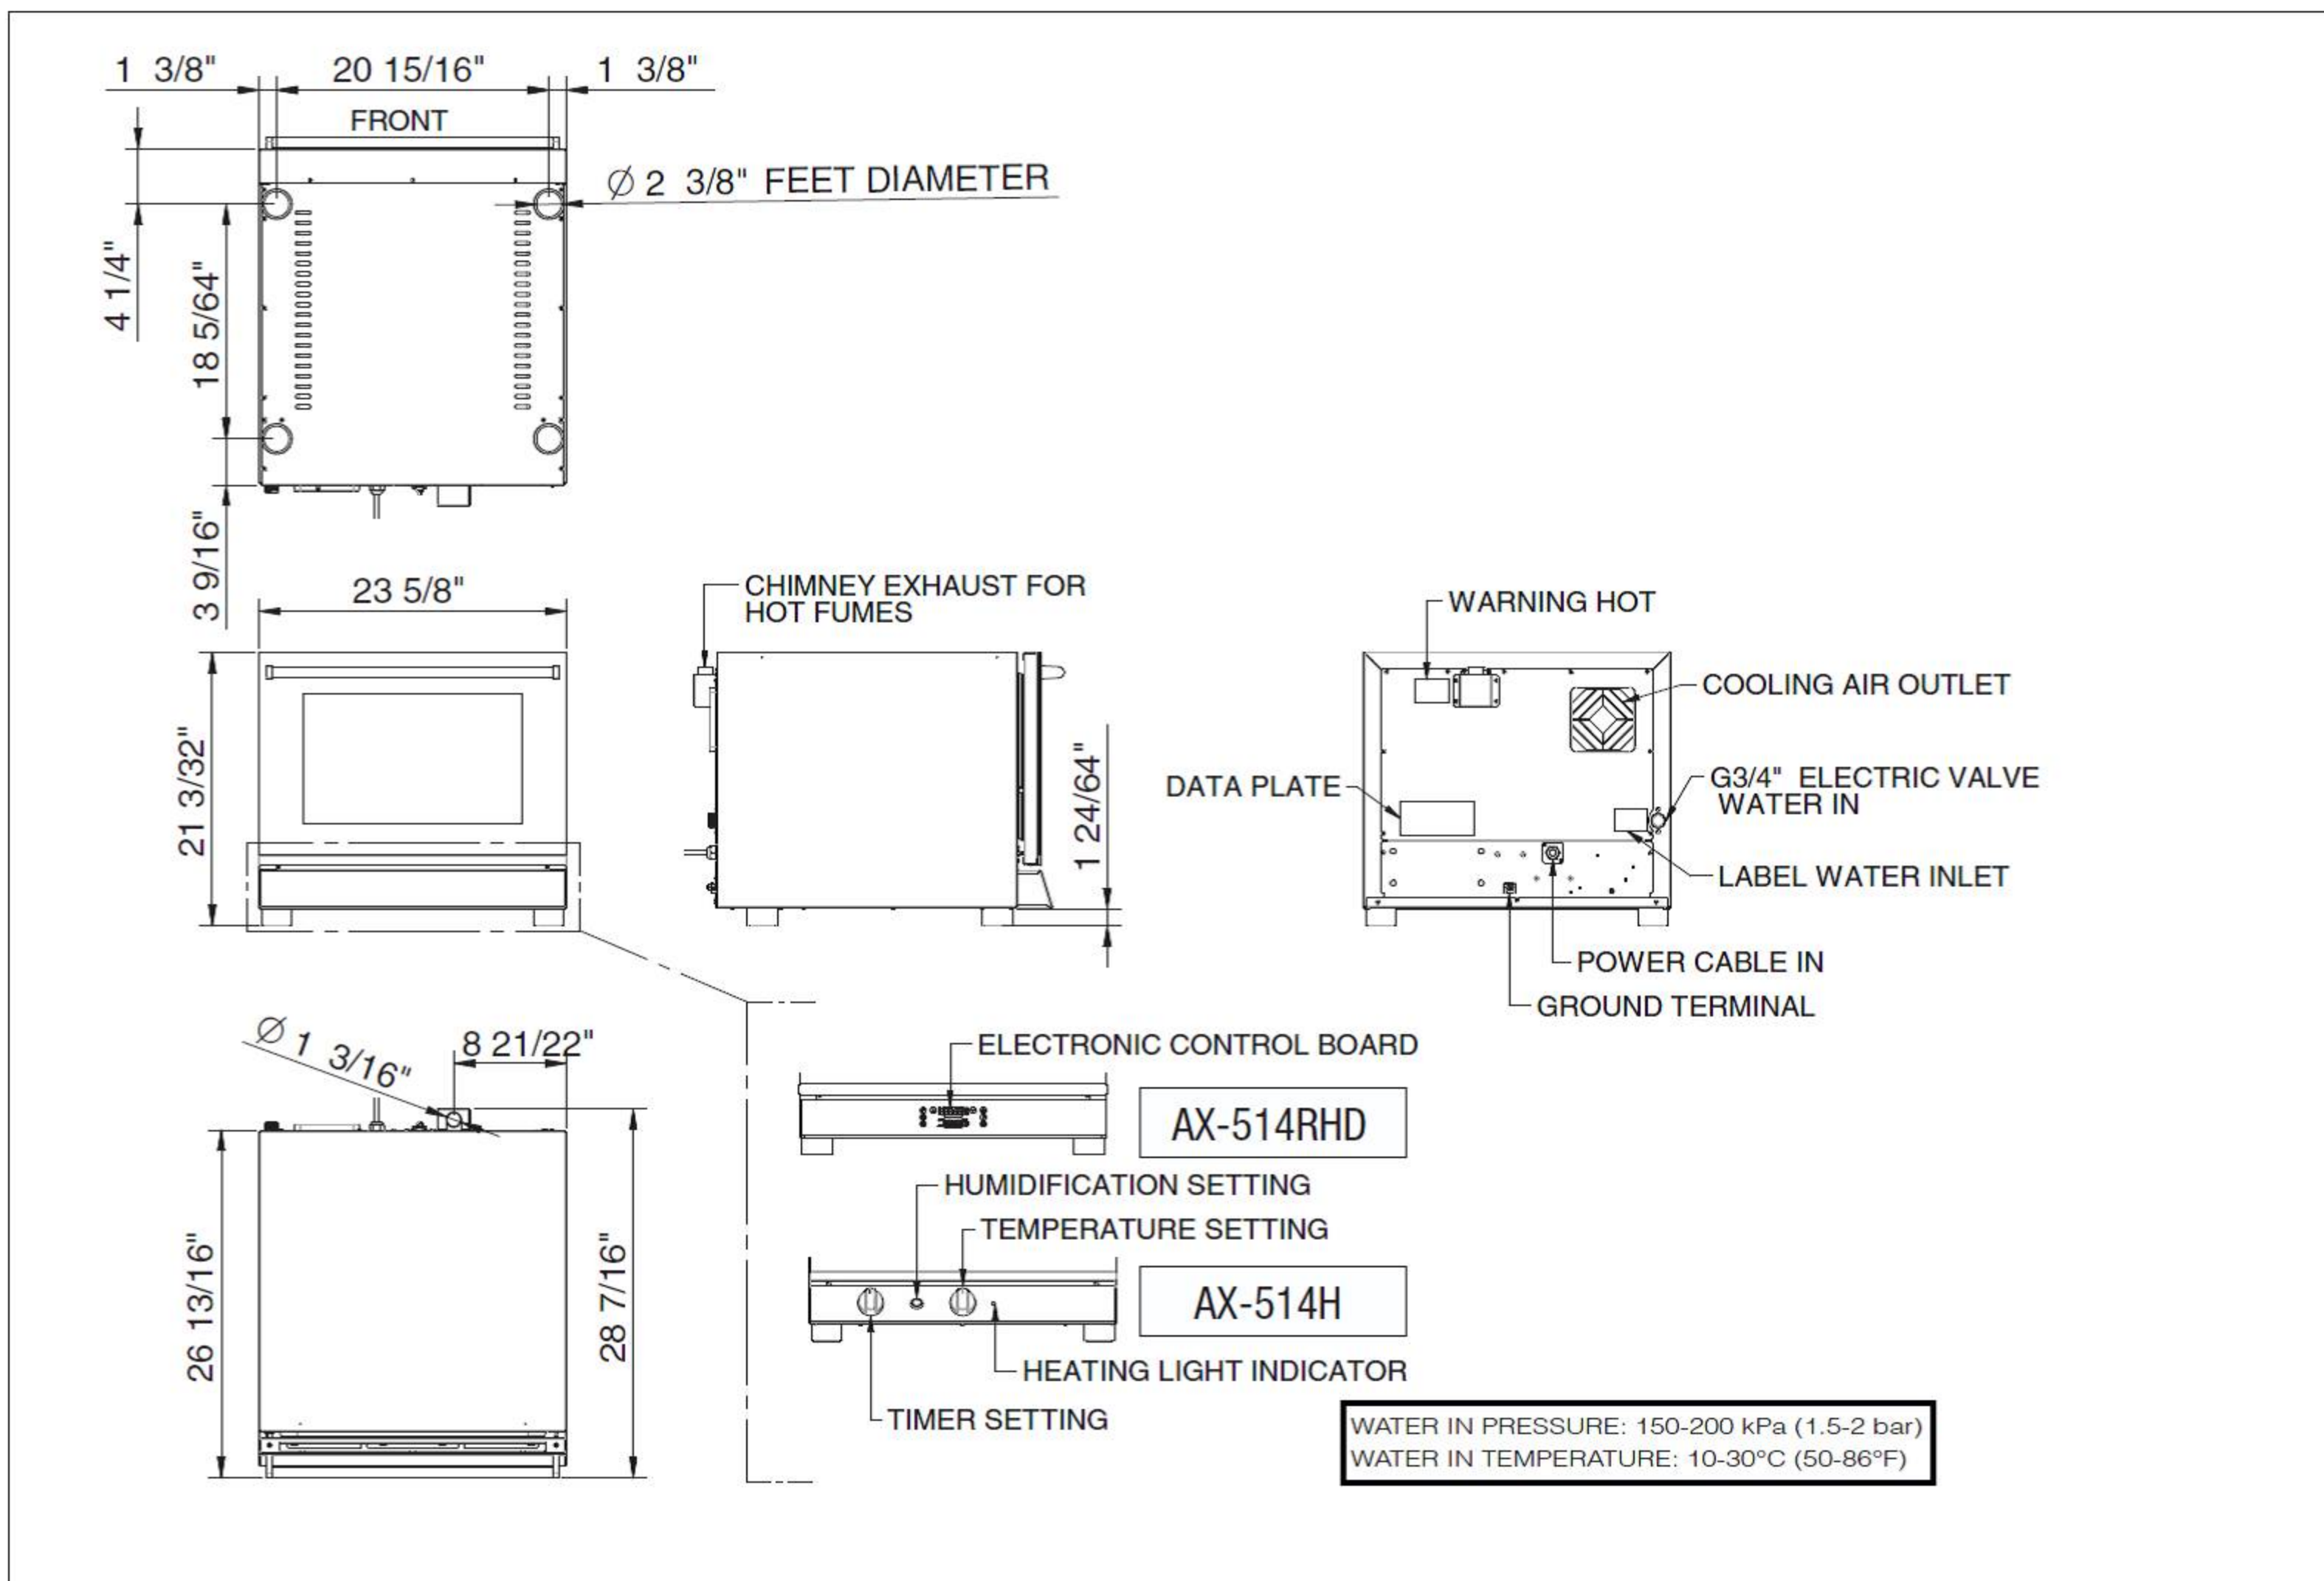



AX-514

Half Size Convection oven with manual controls – 4 shelves

Specifications :

Manual Control knobs	time, temperature
Load capacity	4 shelves Half Size pans
Fan(s)	1
Space between trays	2.95"
Power / Voltage	2500 Watts / 208-240 V 60 Hz / Single Phase / Nema 6-15P
Temperature	120 ° - 510 °F
Equipped with	0-120 minute timer - signal at end of cycle
Dimension of cooking chamber	19.45 x 13.11 x 16.25 (WxHxD) - 2.40 Cubic Feet
Shipping dimensions	26.4" x 27.19" x 21.67"
Net / Ship Weight	67 lbs / 71 lbs

Features :

- Manual controls
 - Optimal airflow system
 - High temperature motor bearings
 - Heavy duty stainless steel body construction
 - Safety "Cold door" design with double wall glass
 - Reinforced door hinges
 - Oven door can support a weight limit of 80 lbs
 - Oven cavity is insulated with ultra-high temperature fibreglass insulation
 - 2 Years Parts* & 1 Year Labor
- *Exceptions: 60 days on glass, gaskets and lights.

