



## AX-824RHD


Full Size Digital Convection Oven with Humidity Inverter system – 4 shelves

### Specifications :

<b>Programmable controls</b>	time, temperature, humidity, 3 cooking cycles for each program
<b>Load capacity</b>	4 shelves Full Size pans
<b>Fan(s) High Speed with reversing gear</b>	2
<b>Space between trays</b>	2.95"
<b>Power / Voltage</b>	5700 Watts / 208-240 V 60 Hz / Single Phase Oven supplied with power cord only / no plug
<b>Temperature</b>	86 ° - 500 °F
<b>Equipped with</b>	16 hour timer - signal at end of cycle
<b>Dimension of cooking chamber</b>	27.33 x 13.11 x 18.73 (WxHxD) - 3,85 Cubic Feet
<b>Shipping dimensions</b>	35.46" x 35.46" x 28.37"
<b>Net / Ship Weight</b>	126 lbs / 154 lbs

### Features :

- Optimal airflow system
  - Automatically reversing gear
  - Digital programmable controls / 99 programs / pre-heating / 3 cooking cycle for each program
  - High temperature motor bearings
  - High speed fan
  - Interior halogen light
  - Includes electro valve for direct water connection
  - Micro safety switch shuts oven off when door is open
  - Heavy duty stainless steel body construction
  - Safety "Cold door" design with double wall glass
  - Reinforced door hinges
  - Oven door can support a weight limit of 80 lbs.
  - Oven cavity is insulated with ultra-high temperature fibreglass insulation
  - Dimensions are suitable to accommodate modular stacking for customized cooking set
  - 2 Years Parts\* & 1 Year Labor
- \* Exceptions: 60 days on glass, gaskets and lights.

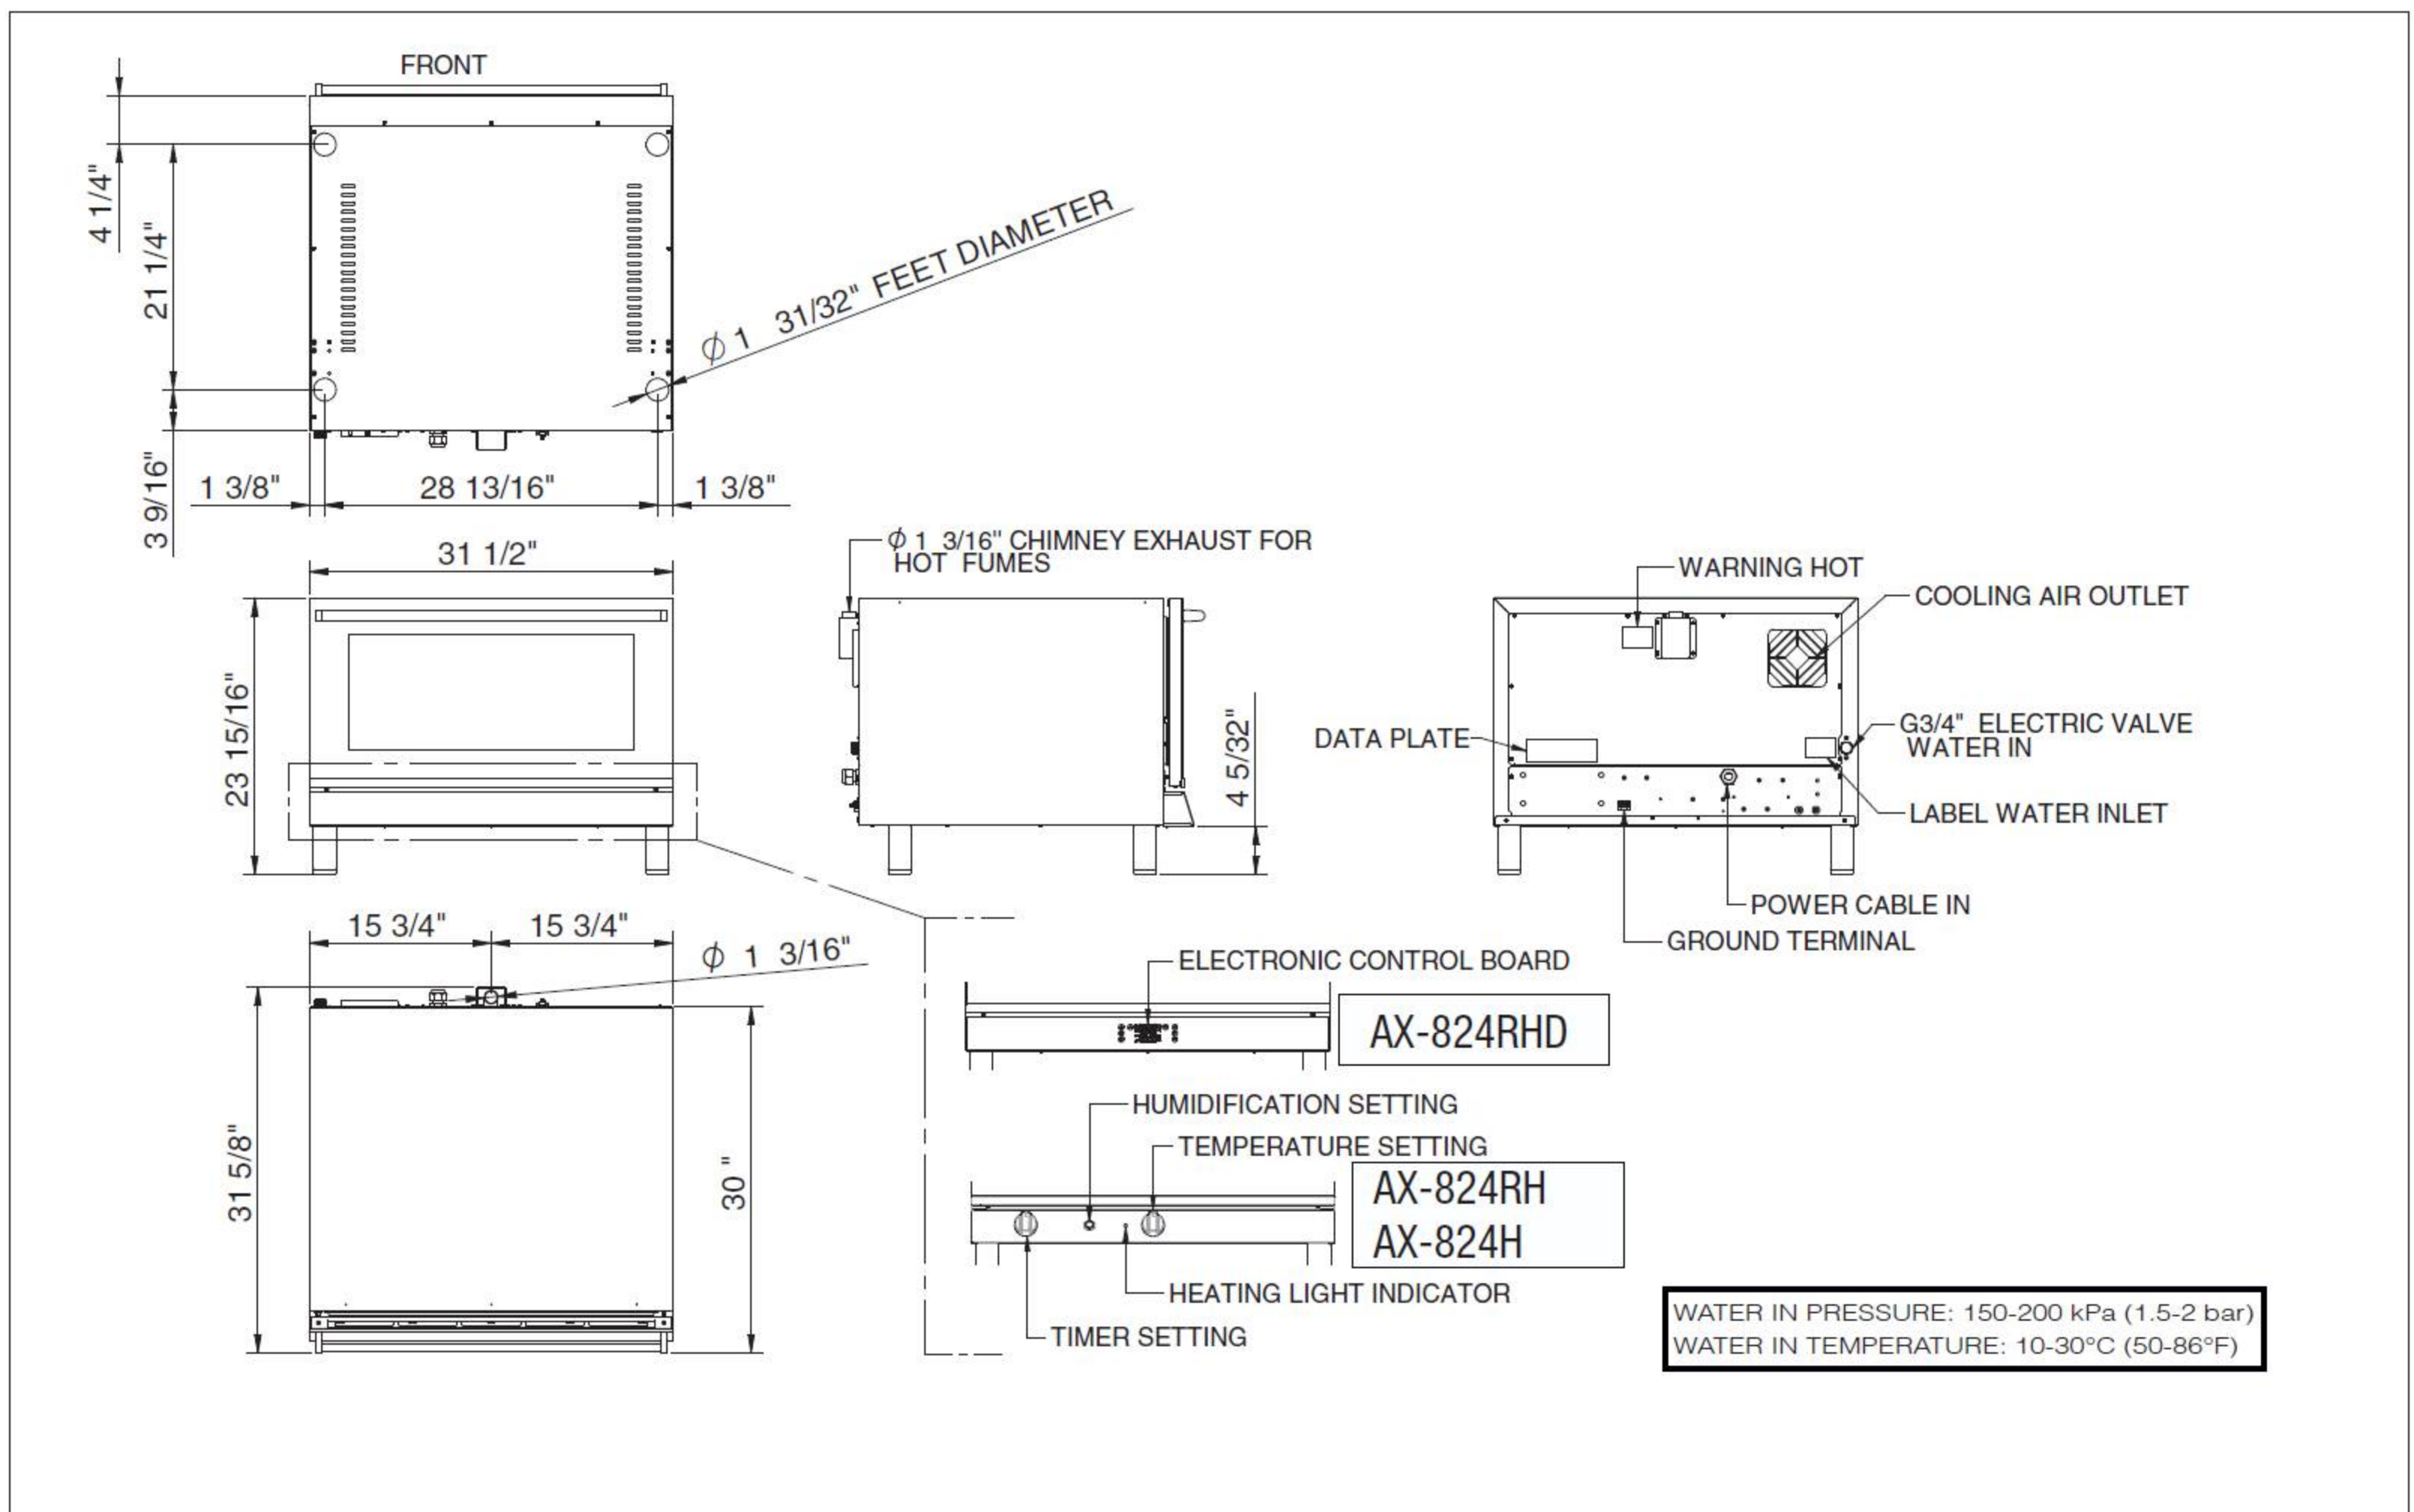





## AX-824RH


Full Size Convection Oven with Humidity  
Inverter system - manual controls – 4 shelves

### Specifications :

Manual Control knobs	time, temperature, humidity
Load capacity	4 shelves Full Size pans
Fan(s) High Speed with reversing gear	2
Space between trays	2.95"
Power / Voltage	5700 Watts / 208-240 V 60 Hz / Single Phase Oven supplied with power cord only / no plug
Temperature	120 ° - 510 °F
Equipped with	0-120 minute timer - signal at end of cycle
Dimension of cooking chamber	27.33 x 13.11 x 18.73 (WxHxD) - 3,85 Cubic Feet
Shipping dimensions	35.46" x 35.46" x 28.37"
Net / Ship Weight	126 lbs / 154 lbs

### Features :

- Automatically reversing gear
  - Manual controls
  - Optimal airflow system
  - High temperature motor bearings
  - High speed fan
  - Interior halogen light
  - Micro safety switch shuts oven off when door is open
  - Includes electro valve for direct water connection
  - Heavy duty stainless steel body construction
  - Safety "Cold door" design with double wall glass
  - Reinforced door hinges
  - Oven door can support a weight limit of 80 lbs.
  - Oven cavity is insulated with ultra-high temperature fibreglass insulation
  - Dimensions are suitable to accommodate modular stacking for customized cooking set
  - 2 Years Parts\* & 1 Year Labor
- \* Exceptions: 60 days on glass, gaskets and lights.

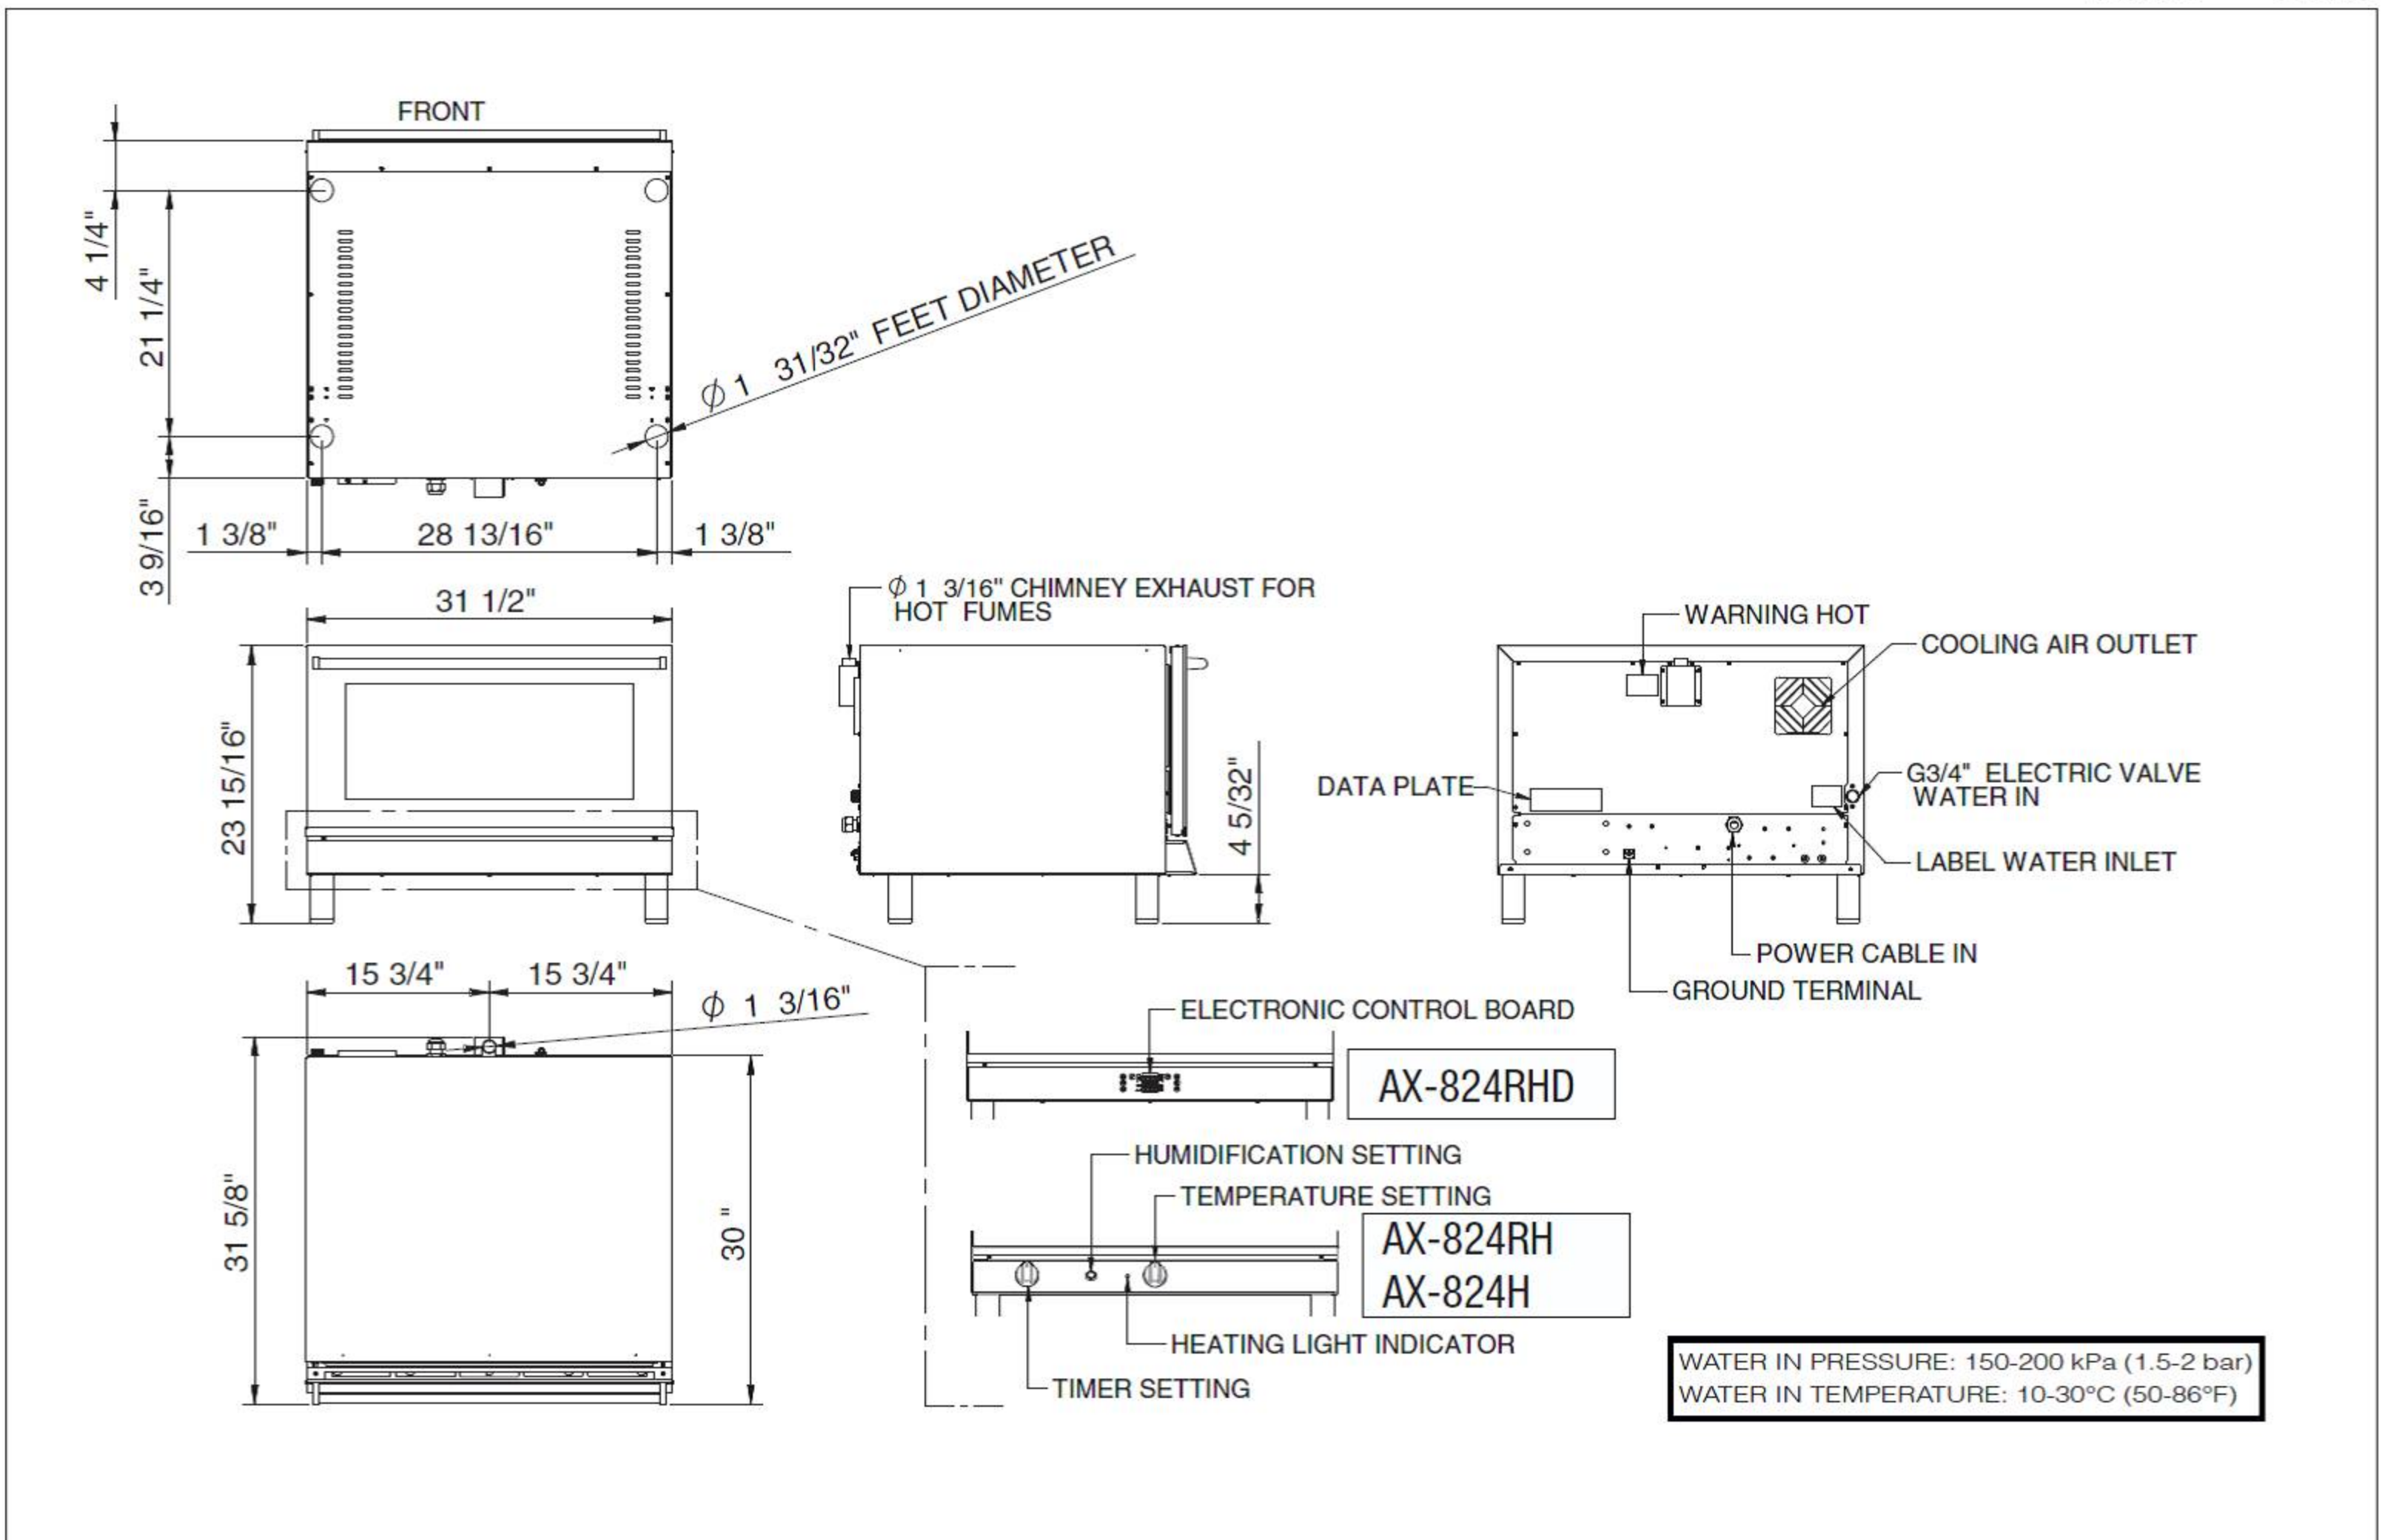





## AX-824H Full Size Convection Oven with Humidity manual controls – 4 shelves

### Specifications :

Manual Control knobs	time, temperature, humidity
Load capacity	4 shelves Full Size pans
Fan(s)	2
Space between trays	2.95"
Power / Voltage	3900 Watts / 208-240 V / 60 Hz / Single Phase Oven supplied with power cord only / no plug
Temperature	120 ° - 510 °F
Equipped with	0-120 minute timer - signal at end of cycle
Dimension of cooking chamber	27.33 x 13.11 x 19.38 (WxHxD) - 4.03 Cubic Feet
Shipping dimensions	35.46" x 33.1" x 29.16"
Net / Ship Weight	94 lbs / 122 lbs

### Features :

- Manual controls
  - Optimal airflow system
  - High temperature motor bearings
  - Interior halogen light
  - Includes electro valve for direct water connection
  - Heavy duty stainless steel body construction
  - Safety "Cold door" design with double wall glass
  - Reinforced door hinges
  - Oven door can support a weight limit of 80 lbs
  - Oven cavity is insulated with ultra-high temperature fibreglass insulation
  - Dimensions are suitable to accommodate modular stacking for customized cooking set
  - 2 Years Parts\* & 1 Year Labor
- \* Exceptions: 60 days on glass, gaskets and lights.

