H5E-DV PC 200

28.4" x 15.5" x 7.0" (72.1cm x 39.4cm x 17.8cm)



- Dispenses hot water in three portion sizes
- Front of machine volume programming
- Precise temperature (60°F-210°F) (15.5°C-98.9°C) ensures consistent, high quality results; adjustable in 1° increments
- Three programmable volume settings and one push and hold continuous dispense button
- All stainless design
- Locate hot water at preparation site to increase speed, safety and efficiency of kitchen staff
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Agency:



Additional Features

Specifications

Product #: 39100.0000 Water Access: Plumbed Finish: Stainless Faucet: Upper Temp. Setting: 200°F (93.333°C) **Dispense:** Portion Control **Dispense:** Push Button

Electrical & Capacity

Volts	Amps	Watts	Cord Attached	Plug Type	`	L) cups/hr	Phase	# Wires plus Ground	Hertz
					35°F (1.67°C)*	140°F (60°C)*		plus oround	
120/208-240	16.9	4050	No	-	59	192	1	3	60
120/208	15	3054	-	N/A	117	320	-	-	-
120/240	17	4050	-	N/A	155	427	-	-	-

*Temperature of water entering the system

Plumbing Requirements

CAD Drawings


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	1/4" Male Flare Fitting	-	•		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Created on: 02/06/2019

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

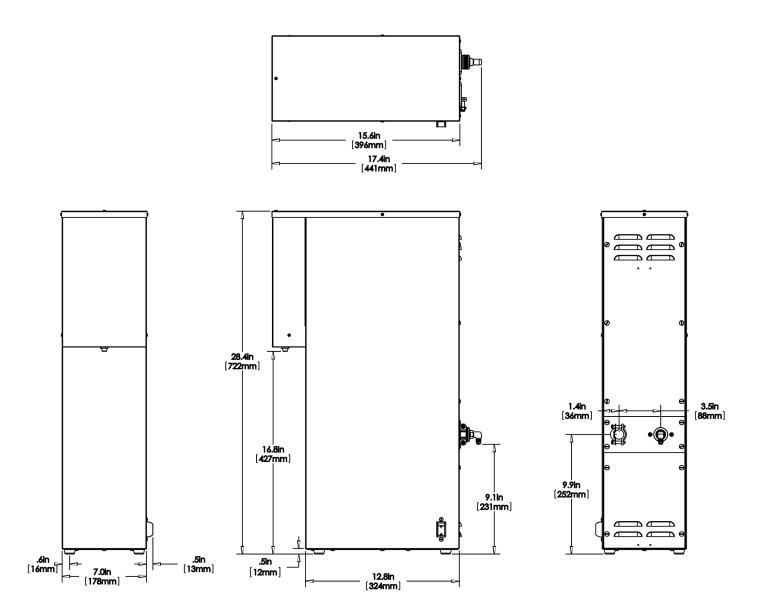

	l	Unit		Shipping					
	Width Height Depth		Width	Height	Depth	Weight	Volume		
English	7.0 in.	28.4 in.	15.5 in.	20.5 in.	32.5 in.	10.8 in.	32.450 lbs	4.164 ft ³	
Metric	17.8 cm	72.1 cm	39.4 cm	52.1 cm	82.6 cm	27.4 cm	14.719 kgs	0.118 m³	



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Creater the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 02/0 For most current specifications and other info visit bunn.com.

Created on: 02/06/2019

Related Products & Accessories: H5E-DV PC 200(39100.0000)







 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Created on:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 02/06/2019

 For most current specifications and other info visit bunn.com.
 02/06/2019

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Created on:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 02/06/2019

 For most current specifications and other info visit bunn.com.
 02/06/2019

H5E-DV PC 90

28.4" x 15.5" x 7.0" (72.1cm x 39.4cm x 17.8cm)



- Dispenses hot water in three portion sizes
- Three programmable volume settings and one push and hold continuous dispense button
- Front of machine volume programming
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)
- Locate hot water at preparation site to increase speed, safety and efficiency of kitchen staff
- All stainless design
- Precise temperature (60°F-210°F) (15.5°C-98.9°C) ensures consistent, high quality results; adjustable in 1º increments

Agency:



Additional Features

Specifications

Product #: 39100.0001 Water Access: Plumbed Finish: Stainless Faucet: Upper **Temp. Setting:** 90°F (32.222°C) Dispense: Portion Control Dispense: Push Button

Electrical & Capacity

Volts	Amps	Watts	Cord Attached	Plug Type	8oz (236m		Phase	# Wires plus Ground	Hertz
					35°F (1.67°C)*	140°F (60°C)*			
120/208-240	16.9	4050	No	-	210	1	3	60	
120/208	15	3054	-	N/A	350	-	-	-	
120/240	17	4050	-	N/A	466	-	-	-	

*Temperature of water entering the system

Plumbing Requirements


CAD Drawings **PSI** kPa **Fitting Supplied** Water Flow Required (GPM) **2D** Revit **KLC** 20-90 138-621 1/4" Male Flare Fitting •



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Created on: 09/21/2018

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

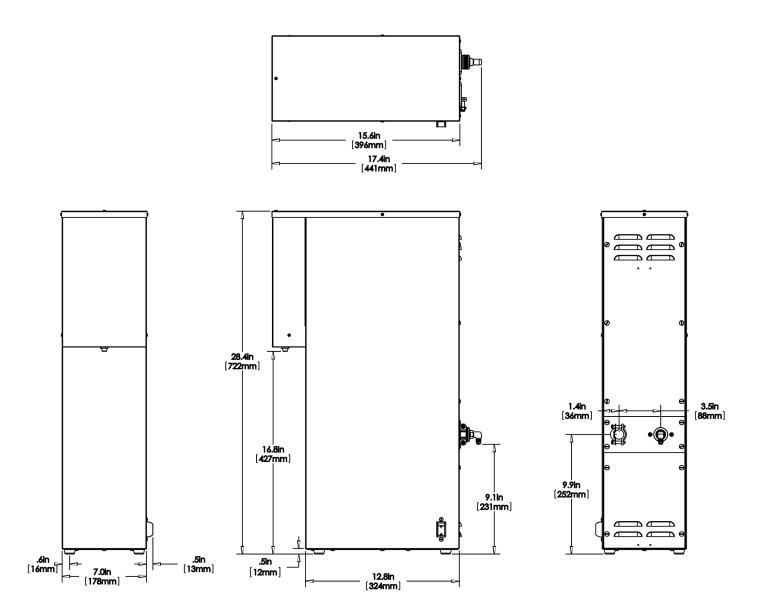

		Unit		Shipping					
	Width Height Depth		Width	/idth Height		Weight	Volume		
English	7.0 in.	28.4 in.	15.5 in.	20.5 in.	32.5 in.	10.8 in.	32.250 lbs	4.164 ft ³	
Metric	17.8 cm	72.1 cm	39.4 cm	52.1 cm	82.6 cm	27.4 cm	14.629 kgs	0.118 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Created on:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 09/21/2018

 For most current specifications and other info visit bunn.com.
 09/21/2018

Related Products & Accessories: H5E-DV PC 90(39100.0001)







 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Created on:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 09/21/2018

 For most current specifications and other info visit bunn.com.
 09/21/2018

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Created on:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 09/21/2018

 For most current specifications and other info visit bunn.com.
 09/21/2018