Medium Volume Refrigerated Dispense Medium volume coffee-on-demand dispenser with refrigerated cabinet to extend

product flavor profile

Accommodates all 1.9L and most 3.8L BIB containers

Convenient flip tray allows for dispensing into decanters or carafes

Compatible with BUNNlink®

Power Logic allows the machine to be wired/configured to operate on any voltage from 100 to 240V, (50 or 60 Hz)

FlavorGard® technology continuously monitors extract-to-water ratio and assures flavor consistency



LCR-2

DESCRIPTION								CAPACITY	ELECTRICAL	
Product #	Model	Connector Type	Product Ratio at 1.8oz/Second Dispense Rate	Product Ratio at 2.5oz/Second Dispense Rate	Dimensions Height x Width x Depth (Inches)		5oz cups/hr 148mL cups/hr**	Volts		
								125	120	
34400.6036	LCR-2	SCHOLLE	45:1-100:1	65:1-100:1	38.00	12.20	24.90	385	208	
								512	240	
								125	120	
34400.6060	LCR-2	SCHOLLE	25:1-45:1	25:1-65:1	38.00	12.20	24.90	385	208	
								512	240	

LCR-2 (w/Scholle 1910 1/8")

38.0" x 24.8" x 12.2" (96.5cm x 63.0cm x 31.0cm)



- Accommodates 1/2gal (1.9L) and most 1gal (3.8L) bag-in-box (BIB) containers
- Attractive appearance and narrow 12" (30.5 cm) width
- FlavorGard® technology continuously monitors extract-to-water ratio and assures flavor consistency
- Refill or rinse LED lights alert the operator for concentrate or cleaning
- Refrigerated product cabinet extends product flavor profile, adjustable to maintain 41° to 65°F in the product compartment

Agency:

Legs: 4" Black Legs





Specifications

Product #: 34400.0036

Product Ratio: 45:1-100:1

Connector: Scholle

Water Access: Plumbed

Finish: Black

Additional Features

Alt Disp Rate 2.5 oz/s(74ml/s)

Alt Product Ratio 65:1-100:1

BUNNLINK Compatible

Electrical & Capacity

Volts	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	13.2	1575	Yes	NEMA 5-15P	73	60°F (15.5°C)	1	2	60
120/208	21	4331	-	N/A	220	60°F (15.5°C)	1	-	-
120/240	24	5700	-	N/A	293	60°F (15.5°C)	1	-	-

Plumbing Requirements

-					_
	PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	
	20-90	138-621	3/8" Male Flare Fitting	-	

CAD Drawings


2D	Revit	KLC
•		

Created on:

11/26/2018




BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

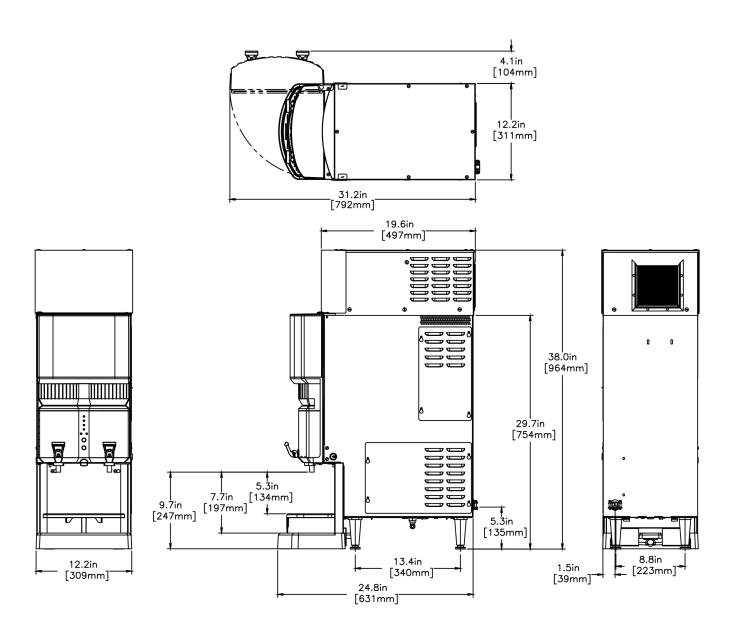

Unit				Shipping					
	Width Height Depth		Depth	Width	Height	Depth	Weight	Volume	
English	12.2 in.	38.0 in.	24.8 in.	-	-	-	115.250 lbs	-	
Metric	31.0 cm	96.5 cm	63.0 cm	-	-	-	52.277 kgs	-	



Related Products & Accessories:LCR-2 (w/Scholle 1910 1/8")(34400.0036)















Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

