

# MODEL 90-Due'-Series

## Wood, Gas, Gas/Wood Fired Oven

The 90-Due' is a medium capacity oven that features an oval shaped cast body which is ideal for spaces that have limited depth. A curved and domed oval interior allows for optimal convection unlike rectangular or square shaped interiors.

The Model 90-Due' features a cast body 4 to 6 inches thick using a dense high temperature refractory material with 80% alumina content and additional special additives which stop deterioration from acids emitted by wood combustion. Between the cast oven body and steel outer enclosure is a hardened lightweight insulation mixture (4 to 20 inches thick), which forms a secondary molded body. Our thick cast refractory body and an outer insulation shell maximizes the thermal mass (heat storage) capacity of the oven which allows for an extremely efficient oven that cooks at even non fluctuating temperatures.

A temperature probe is placed 3 1/2" into the dome of the oven instead of under the cooking floor to avoid temperature readout fluctuations caused by food items.

The hearth floor tiles, "Pierre de Boulanger" (Bakers Tiles), which are used in industrial bread baking ovens all across Europe, are refractory material pressed at 8,500 p.s.i. and kiln fired at 2,800 degrees which ceramitizes the material to create a hard and extremely durable tile. Both the body pieces and floor tiles are cast and assembled individually which allows for continuous joints throughout the entire oven. This greatly reduces the possibility of stress cracks due to normal heat expansion and contraction. In addition this allows the ovens to be serviceable which extends their usable life.

### Fuel Options:

- 90-Due'-PA – Wood Fire (No utilities required)
- 90-Due'-PAG – Gas Fire
- 90-Due'-PAGW – Gas/Wood Fire

Exterior dimensions – 60" x 44"

Interior dimensions – 52" x 32" (Oval)

Oven entrance opening: 22 1/2" – 9 3/4"

Clearance to combustible sidewalls: 1 inch

Weight: 3500 lb

### Utilities Required:

115,000 BTU - 7" W.C. - LP GAS 10" (for PAG and PAGW only)

3/4" female NPT Gas Inlet (for PAG and PAGW only)

120 VAC/ 3 AMP electrical connection

### Pizza Capacities:

12" Pizzas: 4-5 / 16" Pizzas: 2-3

### Ovens come standard with:

- Factory finished grey powder coat
- Dial thermometer for wood fire model
- Cast aluminum door with Teflon handles
- Granite shelf (Black)
- Hood cover and apron (stainless or copper)
- Stainless steel pizza peel
- 5 year limited warranty on refractory

### Gas and gas/wood models also include:

- Digital thermometer controller for gas and gas/wood models
- Heavy duty gas burner system with ceramic fire logs
- 1 year limited warranty on gas / electrical

*Custom options and finishes available*



*Gas fire oven with ceramic log set*



Intertek

Intertek


# MODEL 90-DUE'

**JOB:**

**ITEM:**

**FUEL:**

## PLAN VIEW

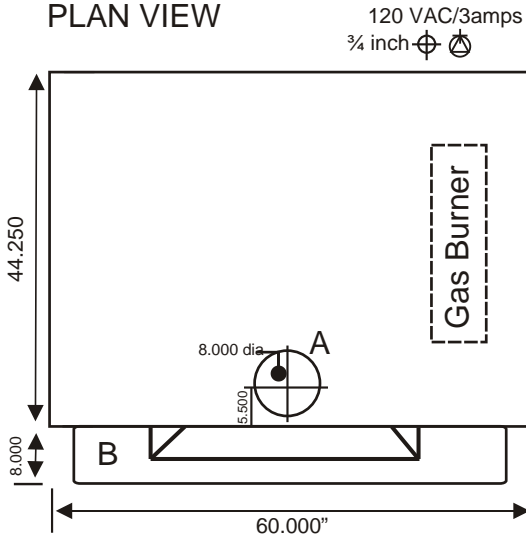

### Fuel Options

- 90-DUE-PA - Wood Fired (No Utilities Required)
- 90-DUE-PAG - Gas Fired (Requires 120V/3 amp)
- 90-DUE-PAGW - Gas or Gas/Wood Fired (Requires 120V/3 amp)

### Utilities for PAG and PAGW Models

- 115 BTU's 7" W.C. - LP Gas 12" W.C.
- 3/4" Gas inlet
- 120 VAC / 3AMP (240VAC available)


Weight - 3500 Lbs

- A - Flue Collar (8" Dia.)
- B - Granite Mantle (Black)
- C - Primary Hood Cover (Stainless or Copper)
- D - Forklift Here
- E - Pallet Jack Here
- F - Oven Entrance (26.00 x 14.00)
- G - Apron (Stainless or Copper)
- H - Front Entrance Plate (Black)
- I - Dial Thermometer / Digital Thermometer Controller



### Venting applications for commercial use:

ETL/U.L. Listed grease duct/building heating appliance chimney or ETL/U.L. Listed Type I exhaust hood.

## ELEVATION

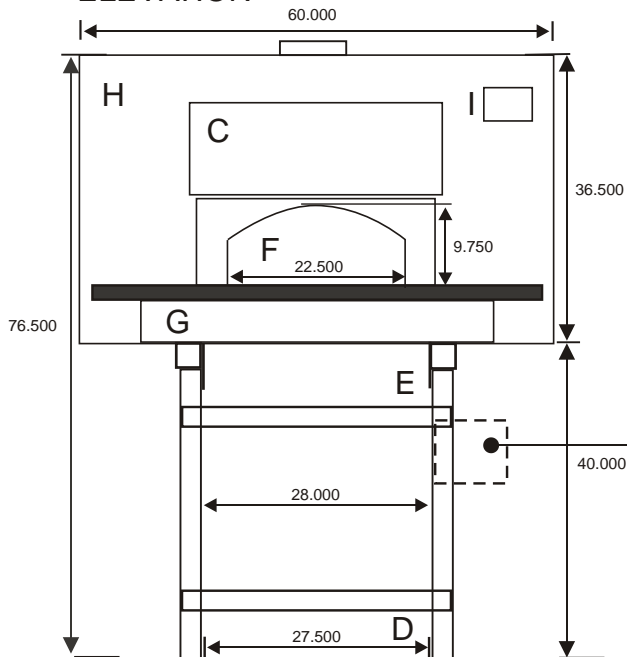

## SECTION

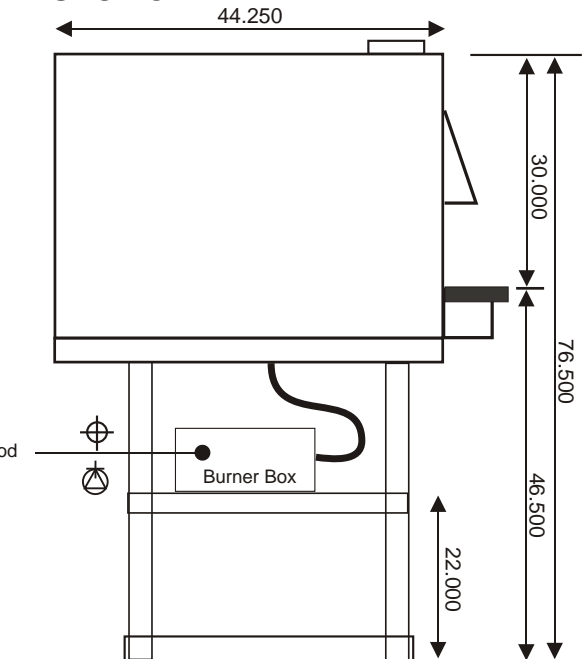

Revised January 2018