
## Laboratory High Shear Granulator

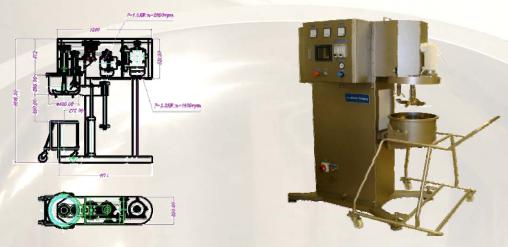

Model MHS-25T (Top Drive)

**Specifications:** 

28 liter GMP design with removable bowls
316 stainless steel for all product contact parts
Features:

**Touch screen controls** 

Analog gauges for voltage & amperage of main impeller and chopper

Mirror polish with elastomer seals

Control panel on the side with standard electrical features
Safety features for bowl-in-position and arm-up
Jacketed bowls and/or hot melt granulation blade—optional
Emergency stop button and inching function

Spray gun optional

Air purge seals w/ volume controls

**Automatic lifting/lowering** 

Stainless Cart w/ tilting mechanism

Service:

Local service and testing facility

Technological expertise for process optimization

Mendel Company

12C Great Meadow Lane East Hanover, NJ 07936

Phone: 973-599-1300 Fax: 973-599-0019

Email: sales@mendelco.com
Web: www.mendelco.com



## **Specifications**

Model	MHS-25T
Maximum Working Capacity (L)	8 to 17
Mixing Speed, (RPM)	50 to 470
Chopper Speed (RPM)	300 to 2800
Mixing Motor Power, (Kw)	2.2
Chopper Motor Power, (Kw)	.75
Approx. Capacity Range, (Kilos)	4 to 8.5

Mendel Company

12C Great Meadow Lane East Hanover, NJ 07936

Phone: 973-599-1300
Fax: 973-599-0019
E-mail: sales @mendelco.com

<u>/eb: www.mendelco.com</u>