


Available Reticles




Trijicon AccuPoint®




BAC
Triangle Post

- TR24R / 1-4x24
- TR24 / 1-4x24
- TR24G / 1-4x24
- TR25-C-200090 / 1-6x24
- TR25-C-200091 / 1-6x24
- TR25-C-200092 / 1-6x24
- TR22R / 2.5-10x56
- TR22 / 2.5-10x56
- TR22G / 2.5-10x56
- TR26-C-200105 / 2.5-12.5x42
- TR26-C-200106 / 2.5-12.5x42
- TR26-C-200107 / 2.5-12.5x42
- TR20R / 3-9x40
- TR20 / 3-9x40
- TR20G / 3-9x40
- TR31-C-200143 / 4-16x50
- TR31-C-200145 / 4-16x50
- TR23R / 5-20x50
- TR23 / 5-20x50
- TR23G / 5-20x50
- TR33-C-200152 / 5-20x50
- TR33-C-200154 / 5-20x50




German #4

- TR24-3G / 1-4x24
- TR24-3 / 1-4x24
- TR25-C-200083 / 1-6x24




Circle
Cross

- TR25-C-200086 / 1-6x24




MOA
Ranging

- TR34-C-200158 / 3-18x50
- TR31-C-200147 / 4-16x50
- TR32-C-200157 / 4-24x50
- TR33-C-200151 / 5-20x50




MRAD
Ranging

- TR31-C-200148 / 4-16x50
- TR33-C-200149 / 5-20x50




MIL
Dot

- TR25-C-200095 / 1-6x24
- TR22-2 / 2.5-10x56
- TR22-2G / 2.5-10x56
- TR26-C-200110 / 2.5-12.5x42
- TR20-2 / 3-9x40
- TR20-2G / 3-9x40
- TR23-2 / 5-20x50
- TR23-2G / 5-20x50



MOA
Dot

- TR25-C-200089 / 1-6x24
- TR26-C-200104 / 2.5-12.5x42



Standard
Duplex

- TR24-C-200070 / 1-4x24
- TR24-C-200071 / 1-4x24
- TR25-C-200080 / 1-6x24
- TR22-1 / 2.5-10x56
- TR22-1G / 2.5-10x56
- TR26-C-200198 / 2.5-12.5x42
- TR20-1 / 3-9x40
- TR20-1G / 3-9x40
- TR31-C-200146 / 4-16x50
- TR23-1 / 5-20x50
- TR23-1G / 5-20x50
- TR33-C-200155 / 5-20x50

Reticles not shown to scale. For a full view of reticles, please visit our website at Trijicon.com.

Trijicon.com/AccuPoint

©2020 Trijicon, Inc. | Wixom, Michigan USA | Phone: 1-800-338-0563 | info@trijicon.com
Specifications subject to change without notice. | PML4081 Rev(0) 1119

When you want the very best—without compromise, without fail, without second-guessing—go with a Trijicon AccuPoint® rifle scope. Designed with battery-free illumination that's always on, the AccuPoint is as technologically sophisticated as it is tough.

- 1 Battery-free, "always-on" illuminated reticle
- 2 Durable construction that protects against the toughest elements
- 3 Crystal-clear lenses for brilliant sight picture and zero distortion
- 4 Second focal plane reticle for pinpoint precision
- 5 Exposed elevation adjusters for repeatable dialing

The Science of Brilliant®

At Trijicon, we are bound by a commitment to industry-leading research, design, and testing to seek innovative aiming solutions that constantly redefine "brilliant." That's why every Trijicon rifle scope design is tested to the procedures below.



> **Alaska-to-Africa Temperature Tested**

To ensure each family of riflescopes is ready for whatever our users put them through, we perform an "Alaska-to-Africa" temperature shock test with temps from -20°F to 140°F.

> **Solid Zero Tested**

Our riflescopes are designed to hold their zero giving you the precision you need. Every model is subjected to 5,000 consecutive rounds, confirming no reticle shift has occurred.

> **Drop Tested**

Because we don't believe every drop should be followed by a warranty claim, we drop test each rifle scope design to check for durability.

> **Shock & Vibration Tested**

All rifle scope models are tested to withstand recoil and vibrational stresses without malfunction, so it can take a beating before, during, and after use.

> **Immersion Tested**

All models are immersion tested, and every rifle scope is dry-nitrogen filled to eliminate internal fogging.

To learn more about Trijicon and The Science of Brilliant, visit Trijicon.com/Science




Features and Benefits



- A Easy-Focus Eyepiece**
Diopter accommodates the shooter's individual prescription.
- B Confident Aiming in Any Light**
Battery-free, illuminated reticles are "always on" using Tritium / Fiber Optic to automatically adjust to lighting conditions.
- C Repositionable Magnification Lever***
Accommodates different shooting positions and rifle configurations.
- D Quick & Easy Adjustments**
Crisp, precise, windage / elevation adjusters require no tools. Capped or zero stop adjusters ensure no accidental shift.
- E Purpose-Driven Design**
Multiple finishes, knurling types, and adjuster styles to suit a variety of applications.
- F Optimal Flexibility**
Generous windage and elevation adjustment for maximum total travel.

**for some models*

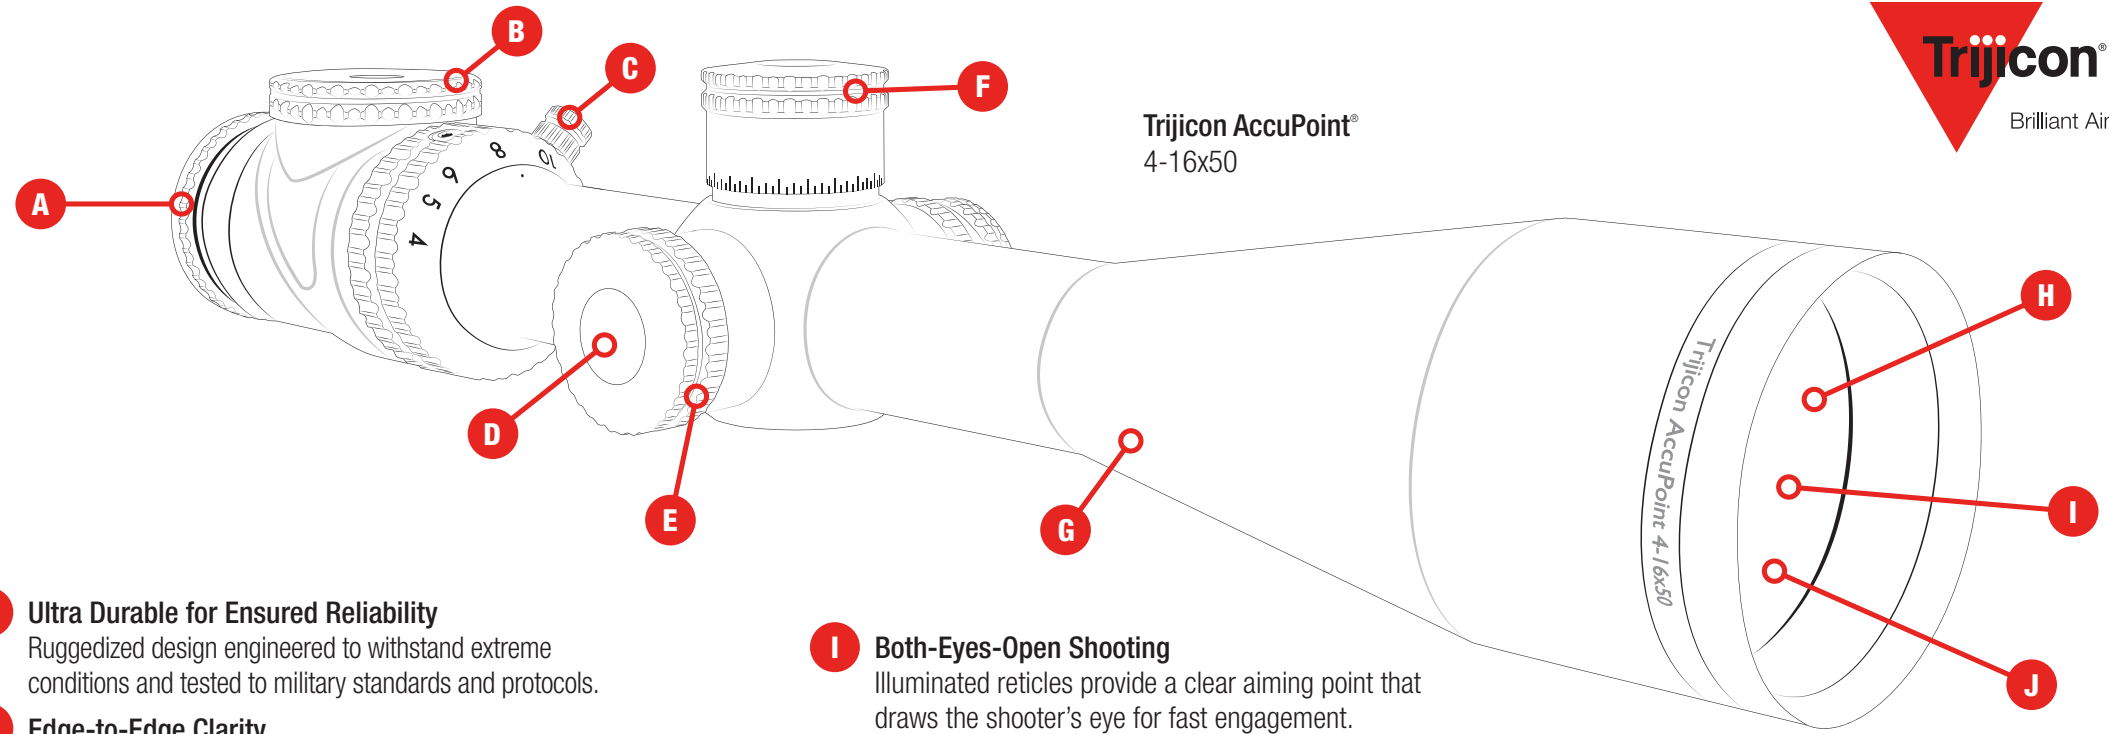

Trijicon AccuPoint®
4-16x50



- G Ultra Durable for Ensured Reliability**
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.
- H Edge-to-Edge Clarity**
Fully multi-coated broadband anti-reflective glass provides excellent light transmission, true detail and color with zero distortion.
- I Both-Eyes-Open Shooting**
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.
- J Quick Target Acquisition**
Proven reticle designs for the most discerning hunters, ensuring fast ranging and holdovers.

Specifications



	1-4x24 (TR24 Series)	1-6x24 (TR25 Series)	2.5-10x56 (TR22 Series)	2.5-12.5x42 (TR26 Series)	3-9x40 (TR20 Series)	» NEW 3-18x50 (TR34 Series)	» NEW 4-16x50 (TR31 Series)	» NEW 4-24x50 (TR32 Series)	» NEW 5-20x50 (TR33 Series)
Eye Relief	2.0 – 3.5 in. 52 – 88mm	2.8 – 5.0 in. 71 – 127mm	2.8 – 4.6 in. 71 – 117mm	2.8 – 4.3 in. 71 – 109mm	2.2 – 3.8 in. 56 – 97mm	3.4 – 4.0 in. 87 – 101mm	3.1 – 3.8 in. 78 – 96mm	3.1 – 3.8 in. 78 – 96mm	3.1 – 3.8 in. 78 – 96mm
Exit Pupil	0.69 – 0.20 in. 17.5 – 5.1mm	0.47 – 0.16 in. 12 – 4.1mm	0.64 – 0.22 in. 16.3 – 5.6mm	0.42 – 0.13 in. 10.6 – 3.3mm	0.52 – 0.17 in. 13.3 – 4.4mm	0.45 – 0.11 in. 11.4 – 2.8mm	0.33 – 0.12 in. 8.5 – 3.1mm	0.33 – 0.08 in. 8.5 – 2.1mm	0.3 – 0.10 in. 7.8 – 2.5mm
Field of View (@ 100 yd.) (@ 100m) (in degrees)	97.5 – 24.2 ft. 32.5 – 8.1m 18.0° – 4.6°	117.5 – 18.8 ft. 39.2 – 6.3m 21.4° – 3.6°	37.6 – 10.1 ft. 12.5 – 3.4m 7.2° – 1.9°	41.3 – 8.3 ft. 13.8 – 2.8m 7.8° – 1.6°	33.8 – 11.3 ft. 11.3 – 3.8m 6.5° – 2.2°	34.7 – 5.8 ft. 11.6 – 1.9m 6.62° – 1.11°	28.5 – 7.1 ft. 9.5 – 2.4m 5.43° – 1.36°	28.5 – 4.7 ft. 9.5 – 1.6m 5.43° – 0.91°	22.8 – 5.7 ft. 7.6 – 1.9m 4.35° – 1.09°
Focal Plane	Second	Second	Second	Second	Second	Second	Second	Second	Second
Elevation Adjuster Style	Low Capped	Low Capped	Low Capped	Low Capped	Low Capped	Exposed Zero Stop	Exposed Zero Stop / Low Capped	Exposed Zero Stop	Exposed Zero Stop
Adjustments	1/4 MOA per click	1/4 MOA per click 0.1 MIL per click	1/4 MOA per click	1/4 MOA per click 0.1 MIL per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click 0.1 MRAD per click	1/4 MOA per click	1/4 MOA per click 0.1 MRAD per click
Adjustment Range Total Travel	90 MOA	110 MOA / 32.6 MIL	60 MOA	90 MOA / 26.7 MIL	50 MOA	60 MOA	100(E)/70(C) MOA / 29.1 MRAD Elevation 70 MOA / 20.4 MRAD	100 MOA Elevation 70 MOA Windage	100 MOA / 29.1 MRAD Elevation 70 MOA / 20.4 MRAD Windage
Parallax Adjustment Range	N/A	N/A	N/A	10 yds. to Infinity	N/A	N/A	10 yds. to Infinity	10 yds. to Infinity	10 yds. to Infinity
Finish	Matte	Matte	Matte	Matte	Matte	Satin	Matte / Satin	Satin	Matte / Satin
Fiber Adjustment Style	Fiber Strip	Fiber Dial	Fiber Strip	Fiber Dial	Fiber Strip	Fiber Dial	Fiber Dial	Fiber Dial	Fiber Dial
Dimensions (L x W x H)	10.3 x 2.0 x 2.0 in.	11.0 x 2.0 x 2.0 in.	13.8 x 2.6 x 2.6 in.	13.8 x 2.4 x 2.3 in.	12.4 x 1.9 x 1.9 in.	14.81 x 2.87 x 2.76 in.	14.4 x 2.9 x 2.4 in.	14.4 x 2.9 x 2.4 in.	14.4 x 2.9 x 2.4 in.
Weight	14.4 oz.	19.2 oz.	20.7 oz.	22.4 oz.	13.4 oz.	27.1 oz.	25.9 - 26.8 oz.	26.8 oz.	26.8 - 26.9 oz.
Illumination Source	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium
Tube Diameter	30mm	30mm	30mm	30mm	1 in.	30mm	30mm	30mm	30mm

*w/out included sunshade (E) = Exposed Adjusters (C) = Capped Adjusters