



Available Reticles




BAC
Triangle Post

- TR24R / 1-4x24
- TR24 / 1-4x24
- TR24G / 1-4x24
- TR25-C-200090 / 1-6x24
- TR25-C-200091 / 1-6x24
- TR25-C-200092 / 1-6x24
- TR22R / 2.5-10x56
- TR22 / 2.5-10x56
- TR22G / 2.5-10x56
- TR26-C-200105 / 2.5-12.5x42
- TR26-C-200106 / 2.5-12.5x42
- TR26-C-200107 / 2.5-12.5x42
- TR20R / 3-9x40
- TR20 / 3-9x40
- TR20G / 3-9x40
- TR34-C-200167 / 3-18x50
- TR34-C-200169 / 3-18x50
- TR34-C-200168 / 3-18x50
- TR31-C-200143 / 4-16x50
- TR31-C-200145 / 4-16x50
- TR32-C-200163 / 4-24x50
- TR32-C-200165 / 4-24x50
- TR32-C-200164 / 4-24x50
- TR33-C-200152 / 5-20x50
- TR33-C-200154 / 5-20x50




German #4

- TR24-3G / 1-4x24
- TR24-3 / 1-4x24
- TR25-C-200083 / 1-6x24




Circle
Cross

- TR25-C-200086 / 1-6x24




MOA
Ranging

- TR34-C-200158 / 3-18x50
- TR31-C-200147 / 4-16x50
- TR32-C-200157 / 4-24x50
- TR33-C-200151 / 5-20x50




MRAD
Ranging

- TR31-C-200148 / 4-16x50
- TR33-C-200149 / 5-20x50




MIL
Dot

- TR25-C-200095 / 1-6x24
- TR22-2 / 2.5-10x56
- TR22-2G / 2.5-10x56
- TR26-C-200110 / 2.5-12.5x42
- TR20-2 / 3-9x40
- TR20-2G / 3-9x40
- TR23-2G / 5-20x50



MOA
Dot

- TR25-C-200089 / 1-6x24
- TR26-C-200104 / 2.5-12.5x42



Standard
Duplex

- TR24-C-200070 / 1-4x24
- TR24-C-200071 / 1-4x24
- TR25-C-200080 / 1-6x24
- TR22-1 / 2.5-10x56
- TR22-1G / 2.5-10x56
- TR26-C-200098 / 2.5-12.5x42
- TR20-1 / 3-9x40
- TR20-1G / 3-9x40
- TR34-C-200166 / 3-18x50
- TR31-C-200146 / 4-16x50
- TR32-C-200162 / 4-24x50
- TR23-1G / 5-20x50
- TR33-C-200155 / 5-20x50

Reticles not shown to scale. For a full view of reticles, please visit our website at Trijicon.com.

Trijicon.com/AccuPoint

©2020 Trijicon, Inc. | Wixom, Michigan USA | Phone: 1-800-338-0563 | info@trijicon.com
Specifications subject to change without notice. | PML4081 Rev(2) 0920



Trijicon AccuPoint®



When you want the very best—without compromise, without fail, without second-guessing—go with a Trijicon AccuPoint® rifle scope. Designed with battery-free illumination that's always on, the AccuPoint is as technologically sophisticated as it is tough.

- 1 Battery-free, "always-on" illuminated reticle
- 2 Durable construction that protects against the toughest elements
- 3 Crystal-clear lenses for brilliant sight picture and zero distortion
- 4 Second focal plane reticle for pinpoint precision
- 5 Exposed elevation adjusters for repeatable dialing

The Science of Brilliant®

At Trijicon, we are bound by a commitment to industry-leading research, design, and testing to seek innovative aiming solutions that constantly redefine "brilliant." That's why every Trijicon rifle scope design is tested to the procedures below.



> Alaska-to-Africa Temperature Tested

To ensure each family of riflescopes is ready for whatever our users put them through, we perform an "Alaska-to-Africa" temperature shock test with temps from -20°F to 140°F.

> Solid Zero Tested

Our riflescopes are designed to hold their zero giving you the precision you need. Every model is subjected to 5,000 consecutive rounds, confirming no reticle shift has occurred.

> Drop Tested

Because we don't believe every drop should be followed by a warranty claim, we drop test each rifle scope design to check for durability.

> Shock & Vibration Tested

All rifle scope models are tested to withstand recoil and vibrational stresses without malfunction, so it can take a beating before, during, and after use.

> Immersion Tested

All models are immersion tested, and every rifle scope is dry-nitrogen filled to eliminate internal fogging.

To learn more about Trijicon and The Science of Brilliant, visit Trijicon.com/Science




Features and Benefits



- A Easy-Focus Eyepiece**
Diopter accommodates the shooter's individual prescription.
- B Confident Aiming in Any Light**
Battery-free, illuminated reticles are "always on" using Tritium / Fiber Optic to automatically adjust to lighting conditions.
- C Repositionable Magnification Lever***
Accommodates different shooting positions and rifle configurations.
- D Quick & Easy Adjustments**
Crisp, precise, windage / elevation adjusters require no tools. Capped or zero stop adjusters ensure no accidental shift.
- E Purpose-Driven Design**
Multiple finishes, knurling types, and adjuster styles to suit a variety of applications.
- F Optimal Flexibility**
Generous windage and elevation adjustment for maximum total travel.

**for some models*

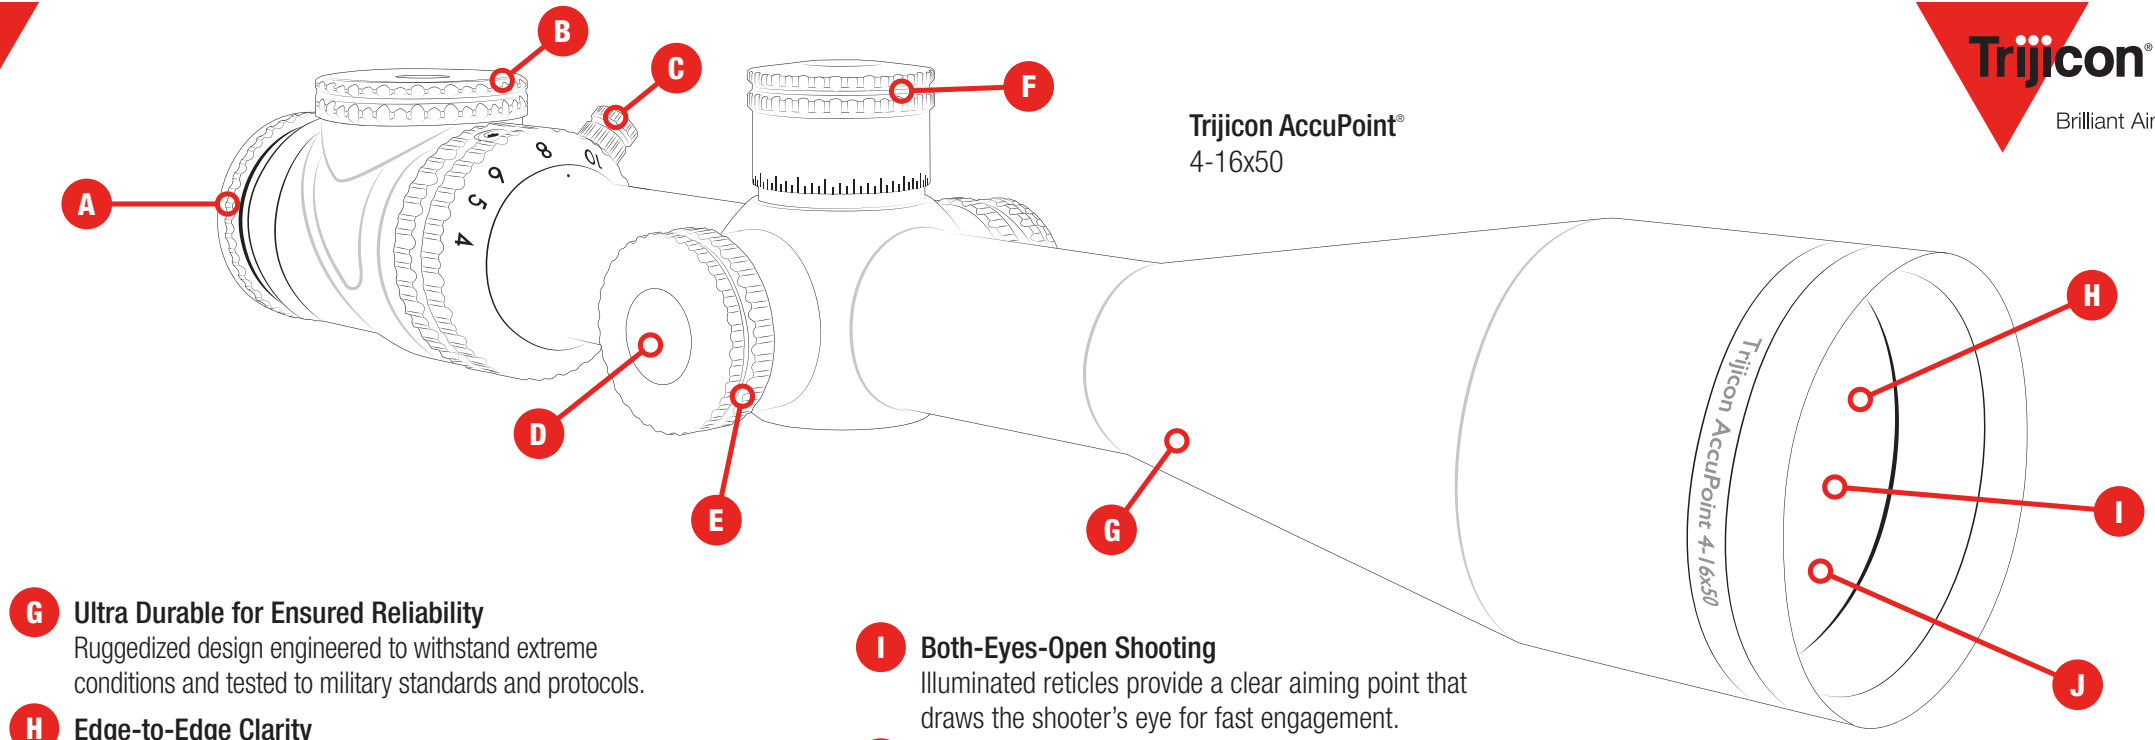

Trijicon AccuPoint®
4-16x50



- G Ultra Durable for Ensured Reliability**
Ruggedized design engineered to withstand extreme conditions and tested to military standards and protocols.
- H Edge-to-Edge Clarity**
Fully multi-coated broadband anti-reflective glass provides excellent light transmission, true detail and color with zero distortion.
- I Both-Eyes-Open Shooting**
Illuminated reticles provide a clear aiming point that draws the shooter's eye for fast engagement.
- J Quick Target Acquisition**
Proven reticle designs for the most discerning hunters, ensuring fast ranging and holdovers.

Specifications

	1-4x24 (TR24 Series)	1-6x24 (TR25 Series)	2.5-10x56 (TR22 Series)	2.5-12.5x42 (TR26 Series)	3-9x40 (TR20 Series)	NEW 3-18x50 (TR34 Series)	NEW 4-16x50 (TR31 Series)	NEW 4-24x50 (TR32 Series)	NEW 5-20x50 (TR33 Series)
Eye Relief	2.0 – 3.5 in. 52 – 88mm	2.8 – 5.0 in. 71 – 127mm	2.8 – 4.6 in. 71 – 117mm	2.8 – 4.3 in. 71 – 109mm	2.2 – 3.8 in. 56 – 97mm	3.4 – 4.0 in. 87 – 101mm	3.1 – 3.8 in. 78 – 96mm	3.1 – 3.8 in. 78 – 96mm	3.1 – 3.8 in. 78 – 96mm
Exit Pupil	0.69 – 0.20 in. 17.5 – 5.1mm	0.47 – 0.16 in. 12 – 4.1mm	0.64 – 0.22 in. 16.3 – 5.6mm	0.42 – 0.13 in. 10.6 – 3.3mm	0.52 – 0.17 in. 13.3 – 4.4mm	0.45 – 0.11 in. 11.4 – 2.8mm	0.33 – 0.12 in. 8.5 – 3.1mm	0.33 – 0.08 in. 8.5 – 2.1mm	0.3 – 0.10 in. 7.8 – 2.5mm
Field of View (@ 100 yd.) (@ 100m) (in degrees)	97.5 – 24.2 ft. 32.5 – 8.1m 18.0° – 4.6°	117.5 – 18.8 ft. 39.2 – 6.3m 21.4° – 3.6°	37.6 – 10.1 ft. 12.5 – 3.4m 7.2° – 1.9°	41.3 – 8.3 ft. 13.8 – 2.8m 7.8° – 1.6°	33.8 – 11.3 ft. 11.3 – 3.8m 6.5° – 2.2°	34.7 – 5.8 ft. 11.6 – 1.9m 6.62° – 1.11°	28.5 – 7.1 ft. 9.5 – 2.4m 5.43° – 1.36°	28.5 – 4.7 ft. 9.5 – 1.6m 5.43° – 0.91°	22.8 – 5.7 ft. 7.6 – 1.9m 4.35° – 1.09°
Focal Plane	Second	Second	Second	Second	Second	Second	Second	Second	Second
Elevation Adjuster Style	Low Capped	Low Capped	Low Capped	Low Capped	Low Capped	Exposed Zero Stop	Exposed Zero Stop / Low Capped	Exposed Zero Stop	Exposed Zero Stop
Adjustments	1/4 MOA per click	1/4 MOA per click 0.1 MIL per click	1/4 MOA per click	1/4 MOA per click 0.1 MIL per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click 0.1 MRAD per click	1/4 MOA per click	1/4 MOA per click 0.1 MRAD per click
Adjustment Range Total Travel	90 MOA	110 MOA / 32.6 MIL	60 MOA	90 MOA / 26.7 MIL	50 MOA	60 MOA	100(E)/70(C) MOA / 29.1 MRAD Elevation 70 MOA / 20.4 MRAD	100 MOA Elevation 70 MOA Windage	100 MOA / 29.1 MRAD Elevation 70 MOA / 20.4 MRAD Windage
Parallax Adjustment Range	N/A	N/A	N/A	10 yds. to Infinity	N/A	N/A	10 yds. to Infinity	10 yds. to Infinity	10 yds. to Infinity
Finish	Matte	Matte	Matte	Matte	Matte	Satin	Matte / Satin	Satin	Matte / Satin
Fiber Adjustment Style	Fiber Strip	Fiber Dial	Fiber Strip	Fiber Dial	Fiber Strip	Fiber Dial	Fiber Dial	Fiber Dial	Fiber Dial
Dimensions (L x W x H)	10.3 x 2.0 x 2.0 in.	11.0 x 2.0 x 2.0 in.	13.8 x 2.6 x 2.6 in.	13.8 x 2.4 x 2.3 in.	12.4 x 1.9 x 1.9 in.	14.8 x 2.9 x 2.8 in.	14.4 x 2.9 x 2.4 in.	14.4 x 2.9 x 2.4 in.	14.4 x 2.9 x 2.4 in.
Weight	14.4 oz.	19.2 oz.	20.7 oz.	22.4 oz.	13.4 oz.	27.1 oz.	25.9 - 26.8 oz.	26.8 oz.	26.8 - 26.9 oz.
Illumination Source	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium
Tube Diameter	30mm	30mm	30mm	30mm	1 in.	30mm	30mm	30mm	30mm

*w/out included sunshade (E) = Exposed Adjusters (C) = Capped Adjusters