

OVS-01GT

Vehicle Presence Sensor for Gates

The OVS-01GT from OPTEX is designed to reliably detect the presence of a stationary or moving vehicle while also having the ability to ignore most human traffic. It also eliminates the hassles associated with the installation of a ground loop. No more concrete cutting required. The OVS-01GT can be mounted 2 to 3 feet off the ground and can detect both small and large vehicles.



OVS-01GT


Vehicle Presence Sensor for Gates

Presence Capability

The OVS-01GT is designed to detect the presence of a vehicle. In applications for gates and barrier arms, it is installed above ground and near the gate operator. It can be mounted on a pole or post. Its detection area can be customized with 8 range settings, 5 sensitivity settings and one-touch calibration.

Ignores Human Movement

In security gate applications, it is important that the sensor only detect vehicles and ignore human movement. The OVS-01GT has 5 selectable menu setting options to ignore human movement.

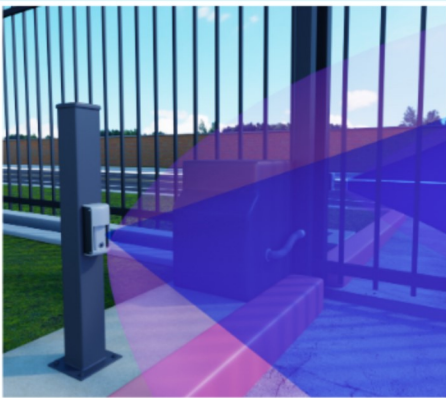


Makes Installation Easier and More Cost Effective

With the OVS-01GT there is no need to stop traffic through the driveway during installation. It mounts quickly, easily and wires directly to the gate operator. No additional loop detector is required. No need for special programmers. A simple to use menu with visual indicators provides a simple and quick installation.

Also available:

OVS-TMB Telescoping Mounting Bracket
OVS-SGA Single Gang Adapter
OVS-MP Mini Post

Adjustable Microwave and Ultrasonic Detection Patterns

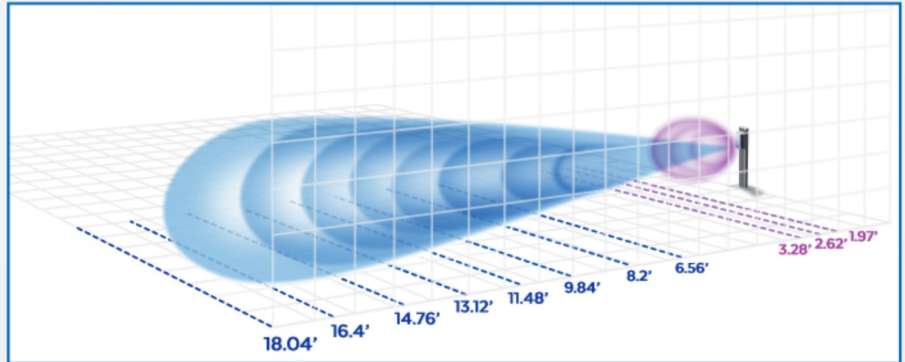

Microwave detection patterns (blue above) are adjustable from 6.56 to 18.04 feet. The Ultrasonic Sensor is for close range detection (purple). The OVS-01GT also features 5 sensitivity settings.

OVS-01GT Specifications

Detection method	Microwave (Doppler shift and FMCW)/Ultrasonic combination	
Frequency	Microwave: 24GHz, Ultrasonic: 56KHz	
Response time	500msec	
Power supply	12-24VDC	
Current consumption	Max 200mA (at 24VDC) with Heater ON Max 80mA (at 24VDC) when Heater is OFF	
Output	Relay output DC30V, 0.3A (NO/NC selectable)	
Input	NO/NC input	
Detection range	Microwave	6.56ft. to 18.04ft. (2 to 5.5m) Programmable maximum range
	Ultrasonic	1.97ft. to 3.28ft.(0.6 to 1m) Programmable maximum range
Detectable vehicle speed	1.24mph-12.43mph (2 to 20km/h)	
Parameters	Sensitivity	Level 1 to 5
	Human Cancel Adjust	Level 1 to 5
	Presence Detection Timer	5 / 60 / 180 / Infinity min
	Sensitivity Boost Timer	Off / 5 / 10 / 20 / 40 sec
	Input	Wake L / Wake H / Inhibit L / Inhibit H
	Output	NO / NC
	Microwave Max. Range	6.56/8.2/9.84/11.48/13.12/14.76/16.4/18.04 ft. (2/2.5/3/3.5/4/4.5/5/5.5m)
	Ultrasonic Max. Range	OFF/1.97/2.62/3.28ft. (OFF/0.6/0.8/1m)
	Sensor Mode	Activation / Vehicle protection
Indicator	Normal operation	Stand-by: Solid Green, Detection: Solid Red
	Detection area check	Non-detection: Blinking Green Microwave sensor detected: Blinking Yellow Ultrasonic sensor detected: Blinking Purple Microwave/Ultrasonic sensor detected: Blinking Red
	Calibration	In calibration: Fast blinking blue Ultrasonic calibration error: Blinking red and blue
	Sensor reset	Reset completed: Blinking yellow for 2 seconds Available from Level 1 to 5
Human cancellation	Available from Level 1 to 5	
Operation temperature	-22°F to 122°F (-30°C to 50°C)	
Operation humidity	95% max. (non-condensing)	
International Protection code	IP65	
Installed condition	Indoor/Outdoor	
Installation height	Installation Height of 19.69in. (500mm).	
Horizontal angle adjustment	Horizontally: +/-30 deg. (5 deg. steps)	
Weight	480g (Including accessories)	
Accessories	4 screws and installation manual	



18730 S. Wilmington Ave, Unit 100
Rancho Dominguez, CA 90220
Ph 800 877-6656
Fax 310 898-1098
www.opexamerica.com

OPEX Inc.
(East Coast Office)
8510 McAlpine Park Dr.
Suite 108
Charlotte, NC 28211