


TOLERANCE UNLESS OTHERWISE SHOWN  
 ONE PLACE DECIMAL ±.1  
 TWO PLACE DECIMAL ±.02  
 THREE PLACE DECIMAL ±.003  
 ANGLE ±0°-30'


SURFACE FINISH

250 ✓

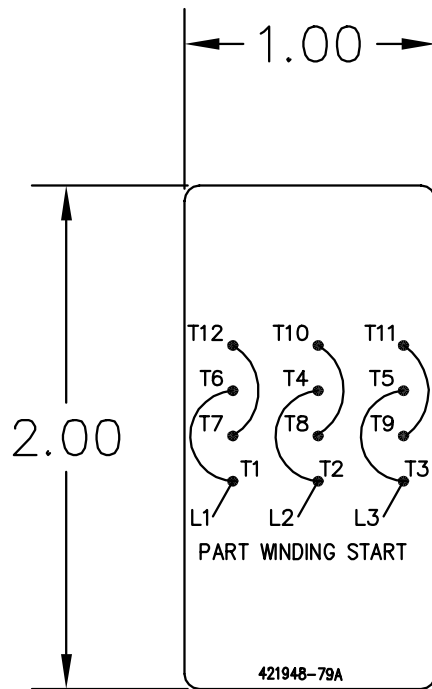


421948-79A

.06 R

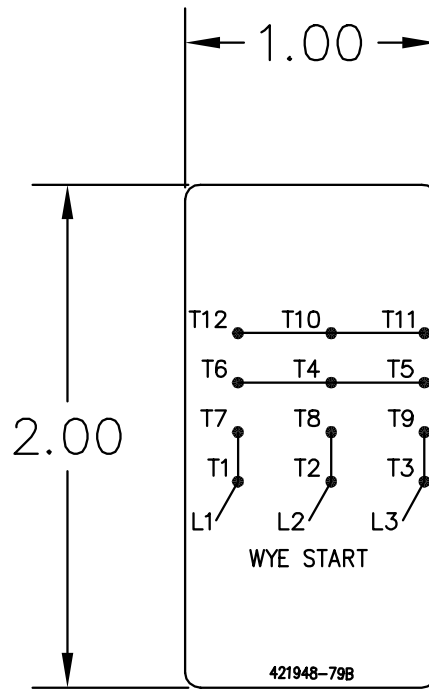

421948-79B

.06 R

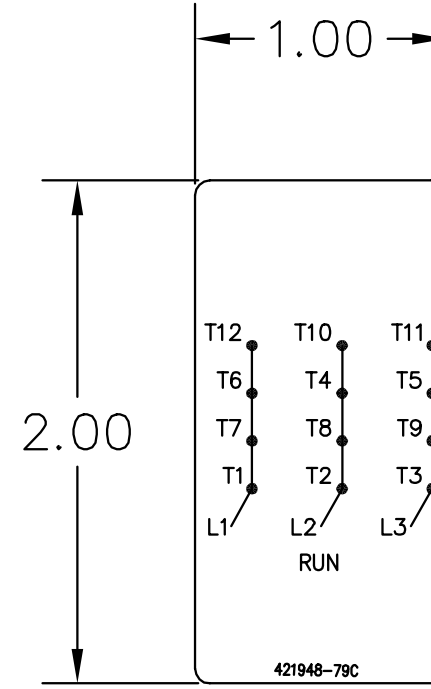

421948-79C

.06 R

MATERIAL SPECIFICATION: .005 THICK DULL SILVER MYLAR,  
 TOPCOAT-ARMORCOTE, PS ADHESIVE, LABEL MUST MEET THE  
 REQUIREMENTS AS SPECIFIED IN CANADIAN STANDARDS  
 ASSOCIATION: "CSA TESTING LABORATORIES TEST PROGRAM  
 FOR ADHESIVE TYPE NAMEPLATES".  
 LETTERING: UNIVERSAL TYPE UNLESS OTHERWISE SPECIFIED.  
 COLORS: 1) BLACK ON NATURAL BACKGROUND

REF: 410961-66A

- 1	421948-79C	RUN CONNECTION
- 1	421948-79B	WYE START
- 1	421948-79A	PART WINDING START
- R	PART	DESCRIPTION

GROUP		
GROUP		

421948-079

REV. DESC:		
REV. LTR: A	VERSION: 01	TDR: 00000591489
FILE: \RAG\00013\521	REVISED: 01:12:47 04/18/2011	
MTL: -	BY: RAGBRP	

**BALDOR**

MYLAR 12 LEAD PWS OR WYE-DELTA WIRING DIAGRAM  
 SH 1 of 1