Uncontrolled Copy

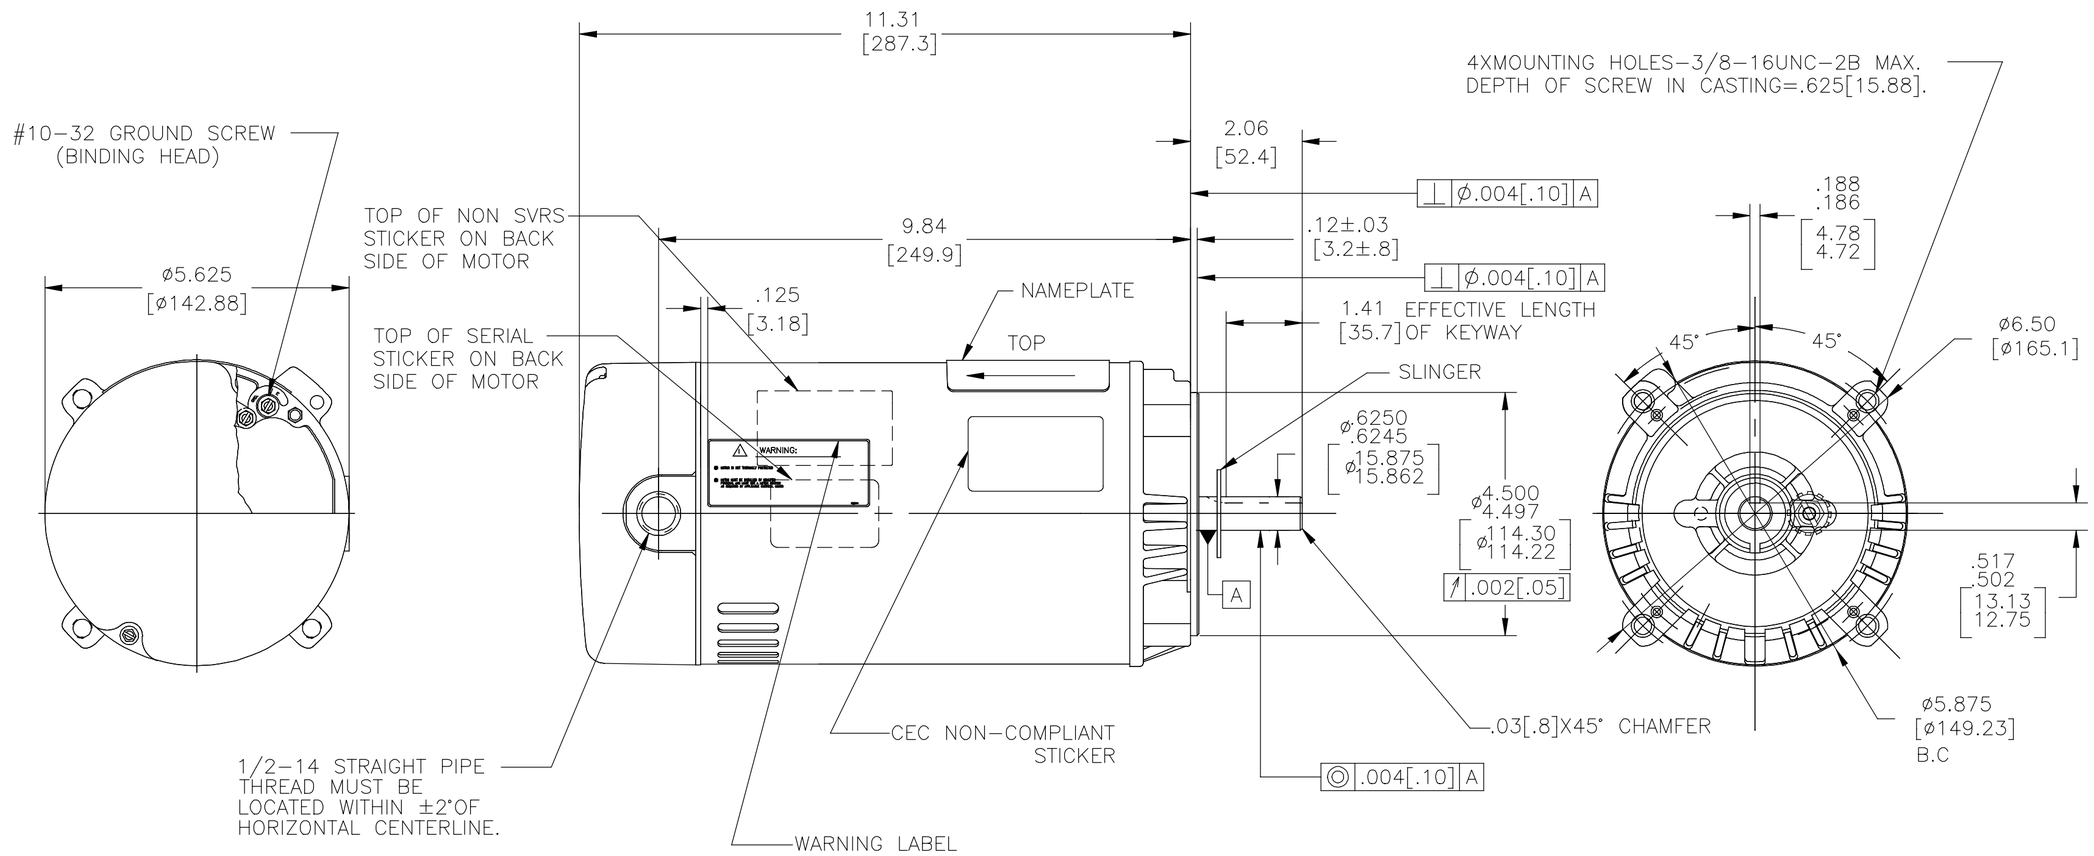

NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES

MODEL: P48M2DA1
CUST PN: K3152
HP: 1/2 SF: 1.3
ROT: REVERSIBLE
RPM: 3450
TYPE: P CODE: N
FORM: FRAME: 56C
VOLTS: 208-230/460
AMPS: 5.0/2.5
MAX AMPS: 6.8/3.4
SF AMPS: -
PH: 3 HZ: 60
INS: B AMB: 40
DUTY: CONT
ENCLOSURE: ODP
-

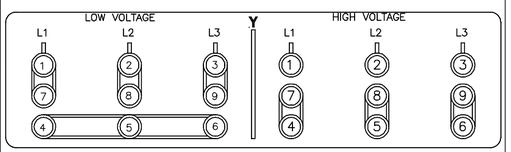

(1) FINISH PAINT TO BE SATIN BLACK.
(2) .438[11.13] WRENCH FLATS ON SHAFT -FOR ACCESS TO THIS WRENCH FLAT REMOVE END COVER.
(3) CARBON STEEL SHAFT.
(4) LIMITS ON AMPLITUDE OF VIBRATION MEASURED AT BEARING HOUSING = .001[.03].
(5) MAX. END PLAY LESS THAN .005[.13].

PERFORMANCE CURVE		APPROVED SAMPLE	
P48M2W4			
UL COMPONENT		CSA	
FILE#	CCN#	FILE#	GUIDE#
E46412	PRGY2	LR43341	4211-01
CUSTOMER	DISTRIBUTION SERVICES		

DRAWING REVISION	REVISION BY	DATE
C	P.ROJAS	04-29-2019
ECO	APPROVED BY	DATE
ECO-0165900	P.ROJAS	04-29-2019
ECO DESCRIPTION		
SEE ECO		

COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.
PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

TOLERANCES UNLESS OTHERWISE SPECIFIED

DEC.	INCH	mm	ANGLE
.X	±0.1	[±2.5]	±0.5°
.XX	±0.02	[±0.51]	
.XXX	±0.005	[±0.127]	
.XXXX	±0.0005	[±0.0127]	

REMOVE BURRS & BREAK SHARP EDGES .003/.015 [.076/.381] X 45°
CORNER FILLETS R.02 [.51]
MACHINED SURFACES 125 INCH / 3.2 mm
mm SHOWN IN [BRACKETS]

DRAWN BY:	
DZ	
DATE:	
10-21-2010	
APPROVED BY:	
P.ROJAS	
DATE:	
04-29-2019	
REFERENCE	
.	
THIRD ANGLE PROJECTION	

Regal Beloit America, Inc.

DESCRIPTION
MODEL-RFHP-48FR
OUTLINE

MATERIAL	PROCESS/FINISH
.	.

SIZE	DWG NO	SHEET
C	K3152	1