Uncontrolled Copy

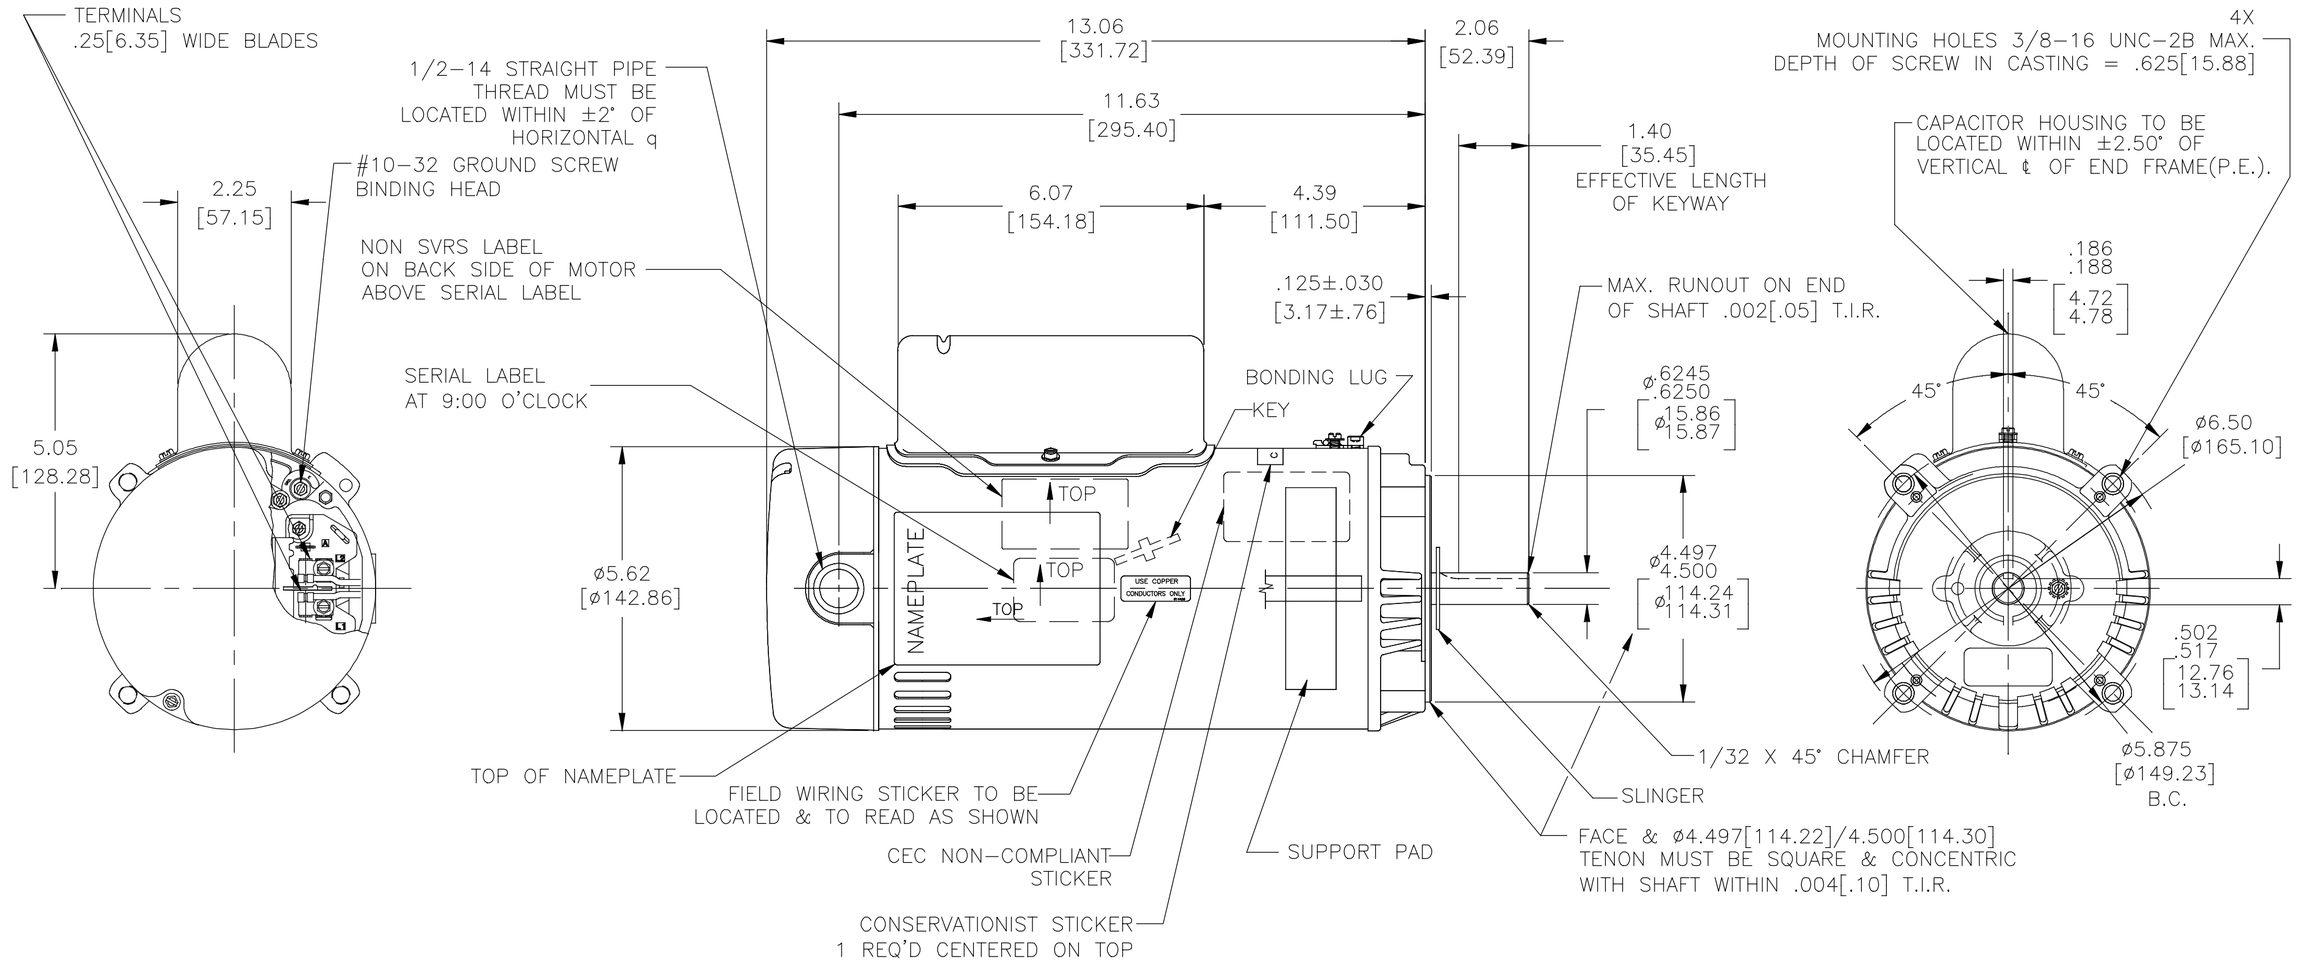

NAMEPLATE DATA

MODEL: K48N2N113
CUST PN: SK1202
HP: 2 SF: 1.3
ROT: CCWPE
RPM: 3450
TYPE: UAK CODE: H
FORM: FRAME: 56C
VOLTS: 230
AMPS:
MAX AMPS: 11.2
SF AMPS: –
PH: 1 HZ: 60
INS: B AMB: 50°C
DUTY: CONT
ENCLOSURE: ODP
THERMALLY PROTECTED

EXTERNAL CONNECTION DIAGRAM

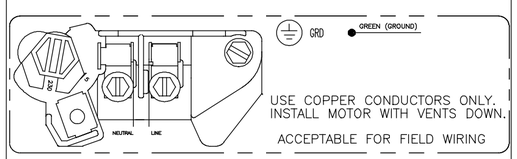

NOTES

NOTES:

(1) FINISH PAINT TO BE SATIN–BLACK.

(2) 7/16" WRENCH FLATS ON SHAFT– FOR ACCESS TO THIS WRENCH FLAT REMOVE END COVER.

(3) STAINLESS STEEL SHAFT EXT.

(4) LIMITS ON AMPLITUDE OF VIBRATION MEASURED AT BEARING HOUSING=.001.

PERFORMANCE CURVE		APPROVED SAMPLE	
K48N2W1			
UL COMPONENT		CSA	
FILE#	CCN#	FILE#	GUIDE#
E25022	XEWR2	LR43341	4211–01
CUSTOMER	DISTRIBUTION SERVICES		

DRAWING REVISION: D	REVISION BY: P.ROJAS	DATE: 04–30–2019
ECO: ECO–0165900	APPROVED BY: P.ROJAS	DATE: 04–30–2019
ECO DESCRIPTION: SEE ECO		

COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION – THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

TOLERANCES UNLESS OTHERWISE SPECIFIED

DEC.	INCH	mm	ANGLE
.X	±0.1	[±2.5]	±0.5°
.XX	±0.02	[±0.51]	
.XXX	±0.005	[±0.127]	
.XXXX	±0.0005	[±0.0127]	

REMOVE BURRS & BREAK SHARP EDGES .003/.015 [.076/.381]
CORNER FILLETS .02 [.51]
MACHINED SURFACES INCH 125 mm 3.2
mm SHOWN IN [BRACKETS]

DRAWN BY: TH	
DATE: 10/27/2010	
APPROVED BY: TZ	
DATE: 10/27/2010	
REFERENCE: .	
THIRD ANGLE PROJECTION	

Regal Beloit America, Inc.

DESCRIPTION: MODEL–PFHP–48FR OUTLINE

MATERIAL: . PROCESS/FINISH: .

SIZE C | DWG NO SK1202 | SHEET 1