



NAMEPLATE DATA	
MODEL: 196385	
CUST PN: ST1302V1	
HP: 3.0	SF: 1.15
ROT: CCWPE	
RPM: 3450	
TYPE: CP	CODE: G
FORM:	FRAME: Y56J
VOLTS: 208-230	
AMPS: SF15.0-13.3	
MAX AMPS: --	
SF AMPS: --	
PH: 1	HZ: 60
INS: B	AMB: 50
DUTY: CONT	
ENCLOSURE: DP	
THERMALLY PROTECTED	

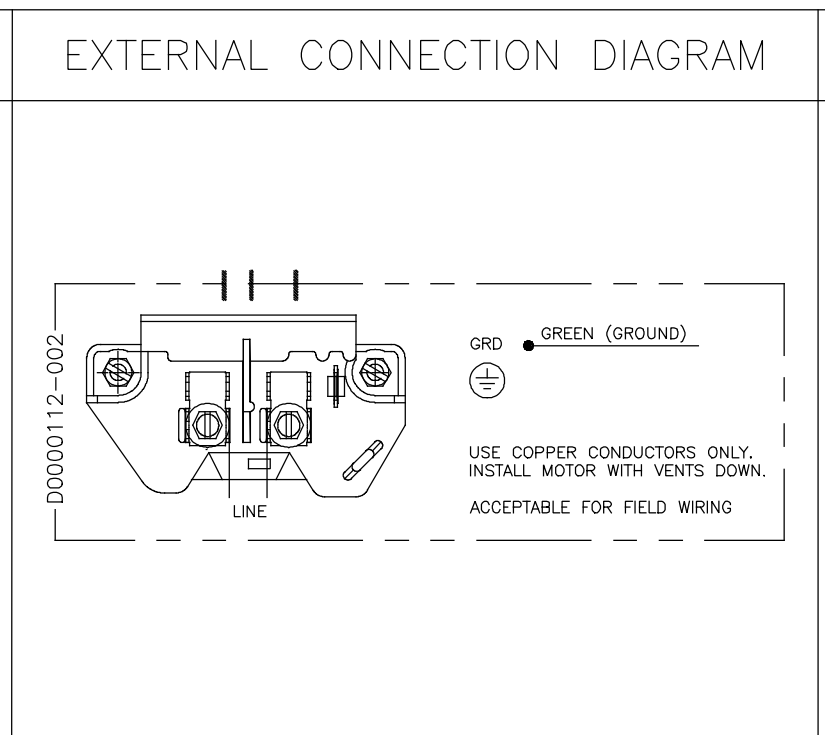

- NOTES
1. END PLAY NOT TO EXCEED .010[.25] MEASURED WITH NO THRUST.
 2. Δ FOR THREADED SHAFT EXT. ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .004 [.10] TOTAL GAGE READING WITH THE INDICATOR ON O.D. OF GROUND RING GAGE AS SHOWN. THE GAGE BEING STATIONARY WITH RESPECT TO THE ROTOR.
 3. FOR THREADED SHAFT EXT. MATING PARTS SHOULD BE RELIEVED ONE THREAD TO CLEAR FILLET.
 4. FINISH PAINT TO BE BLACK LACQUER
 5. STAINLES STEEL SHAFT
 6. .44[11.2] WRENCH FLATS ON SHAFT -FOR ACCESS TO THIS WRENCH FLAT REMOVE END COVER.

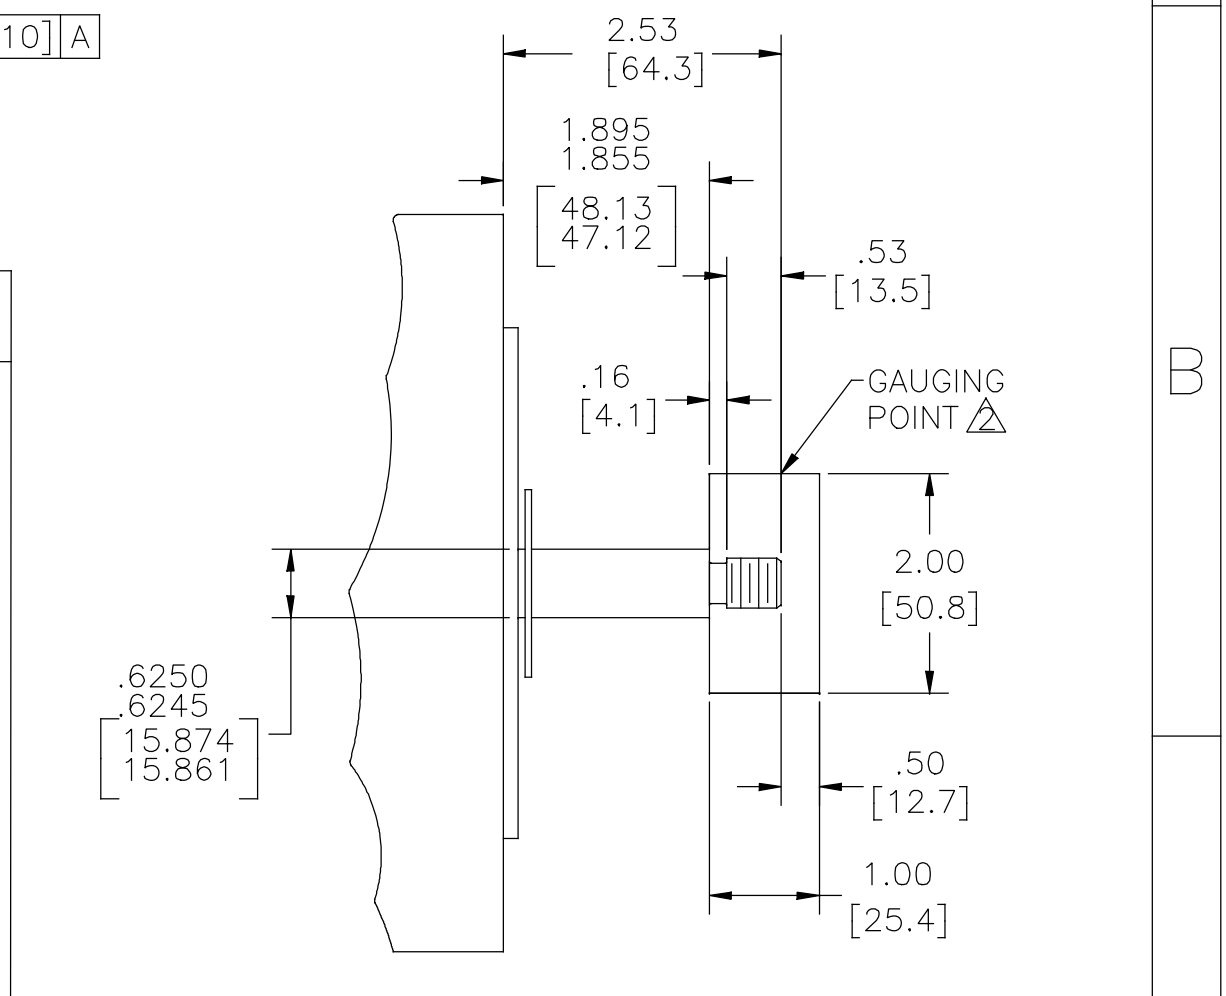

PERFORMANCE CURVE	APPROVED SAMPLE		
101101011	0603286		
UL COMPONENT	CSA		
FILE#	CCN#	FILE#	GUIDE#
E14663	XEWR2	LR4642	4211-01
CUSTOMER	DISTRIBUTION		

DRAWING REVISION	REVISION BY	DATE
L		
ECO	APPROVED BY	DATE
ECO-0165900		12-27-2018
ECO DESCRIPTION		
SEE ECO		

TOLERANCES UNLESS OTHERWISE SPECIFIED	DEC.	INCH	mm	ANGLE
X	± 0.1	[± 2.5]	± 0.5	
.XX	± 0.02	[± 0.51]		
.XXX	± 0.005	[± 0.127]		
.XXXX	± 0.0005	[± 0.0127]		
REMOVE BURRS & BREAK SHARP EDGES .003/.015 [0.076/.381] CORNER FILLETS .02 [0.51] MACHINED SURFACES $\sqrt{125}$ INCH $\sqrt{3.2}$ mm SHOWN IN [BRACKETS]				

DRAWN BY:	MEO	DATE:	02-15-2008	APPROVED BY:	DATE:
REGAL Regal Beloit America, Inc.		DESCRIPTION			
		ST1302V1 OUTLINE			
REFERENCE	MATERIAL	PROCESS/FINISH			
THIRD ANGLE PROJECTION	SIZE DWG NO	ST1302V1	SHEET 1		