


NAMEPLATE DATA	
MODEL: 1936850J	
CUST PN: USN1152	
HP: 1.5	SF: 1.25
ROT: CCWPE	
RPM: 3450	
TYPE: CX	CODE: G
FORM: N	FRAME: N 56 J
VOLTS: 208-230/115	
AMPS:	
MAX AMPS:	
SF AMPS: 8.5-7.8/15.6	
PH: 1	HZ: 60
INS: B	AMB: 50°
DUTY: CONT	
ENCLOSURE: ODP	
THERMALLY PROTECTED	

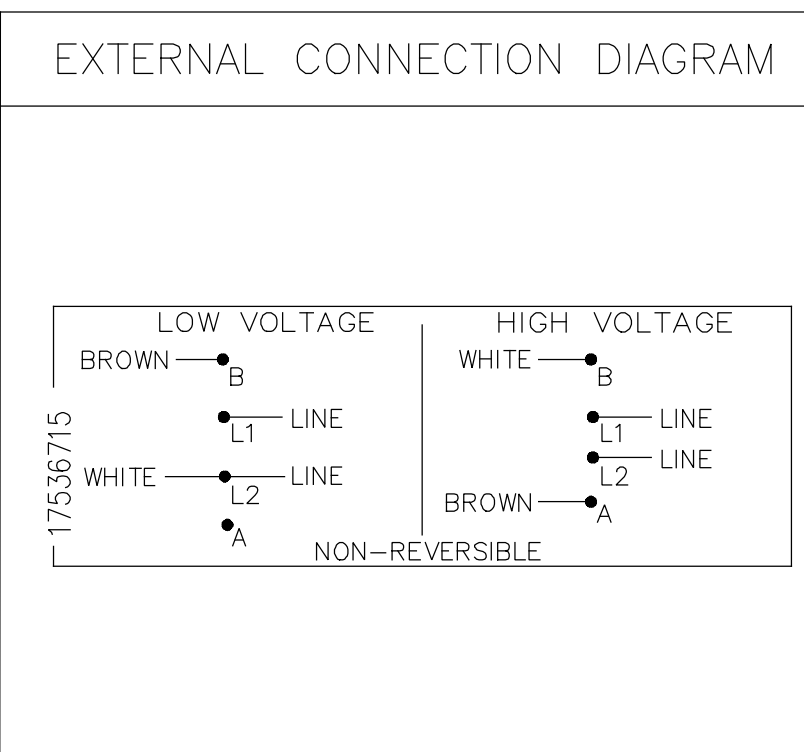

- NOTES
- ⚠ PILOT DIAMETER IS CONCENTRIC WITH SHAFT CENTERLINE WITHIN .004[.10] T.I.R.
 - ⚠ FACE OF MOUNTING FLANGE IS PERPENDICULAR TO SHAFT CENTERLINE WITHIN .004[.10] T.I.R.
 - 3. SHAFT RUNOUT NOT TO EXCEED .002[.05] T.I.R.
 - 4. FOR THREADED SHAFT EXT. MATING, PARTS SHOULD BE RELIEVED ONE THREAD TO CLEAR FILLET.
 - 5. FOR THREADED SHAFT EXT. ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .004[.10] TOTAL GAUGE READING WITH THE INDICATOR ON O.D. OF GROUND RING GAGE AS SHOWN. THE GAGE BEING STATIONARY WITH RESPECT TO THE ROTOR.
 - 6. END PLAY NOT TO EXCEED .010[.25] MEASURED WITH NO THRUST.
 - ⚠ FRONT END FRAME TO BE ALIGNED WITH BACK END FRAME TO WITHIN ±1° RADIAL ALIGNMENT ±.060[±1.52]
 - 8. ● = CRITICAL DIMENSION

PERFORMANCE CURVE		APPROVED SAMPLE	
19222711			
UL COMPONENT		CSA	
FILE#	CCN#	FILE#	GUIDE#
PENDING	PENDING	PENDING	PENDING
CUSTOMER		DISTRIBUTION	

REVISION	REVISION BY	DATE
C	G. RODRIGUEZ	05-02-2019
ECO	APPROVED BY	DATE
ECO-0169500	G. RODRIGUEZ	05-02-2019
ECO DESCRIPTION		
SEE ECO		

TOLERANCES UNLESS OTHERWISE SPECIFIED			
DEC.	INCH	mm	ANGLE
.XX	±0.1	[±2.5]	±0.5°
.XXX	±0.02	[±0.51]	
.XXXX	±0.005	[±0.127]	
.XXXXX	±0.0005	[±0.0127]	
REMOVE BURRS & BREAK SHARP EDGES .003/.015 [0.076/.381] X 45° CORNER FILLETS R.02 [51] MACHINED SURFACES 125/3.2 INCH/mm 3.2			
mm SHOWN IN [BRACKETS]			

DRAWN BY:		REGAL™ Regal Beloit America, Inc.	
TH	DATE:	DESCRIPTION	
	10-27-2010	MODEL-PFHP-56FR	
APPROVED BY:	DATE:	OUTLINE	
TZ	10-27-2010		
REFERENCE		MATERIAL	PROCESS/FINISH
THIRD ANGLE PROJECTION	SIZE DWG NO	SHEET	
	C	1	