


	2				1					
APPLICATION:		B	LA	FR	A	S	C	E	B	A
CUSTOMER:	FASCO DIST.	03	63	30	V	06	JN	5	3	0
CUSTOMER PN:	50755-D230									

## THERMALLY PROTECTED CLASS "B" INSULATION

LEAD MATERIAL  
18 GA. 125°C 4/64 INSUL.  
EPDM, (2) BLACK  
14.00/12.00 [355.60/304.80]  
.68/.56 [17.22/14.22] STRIP

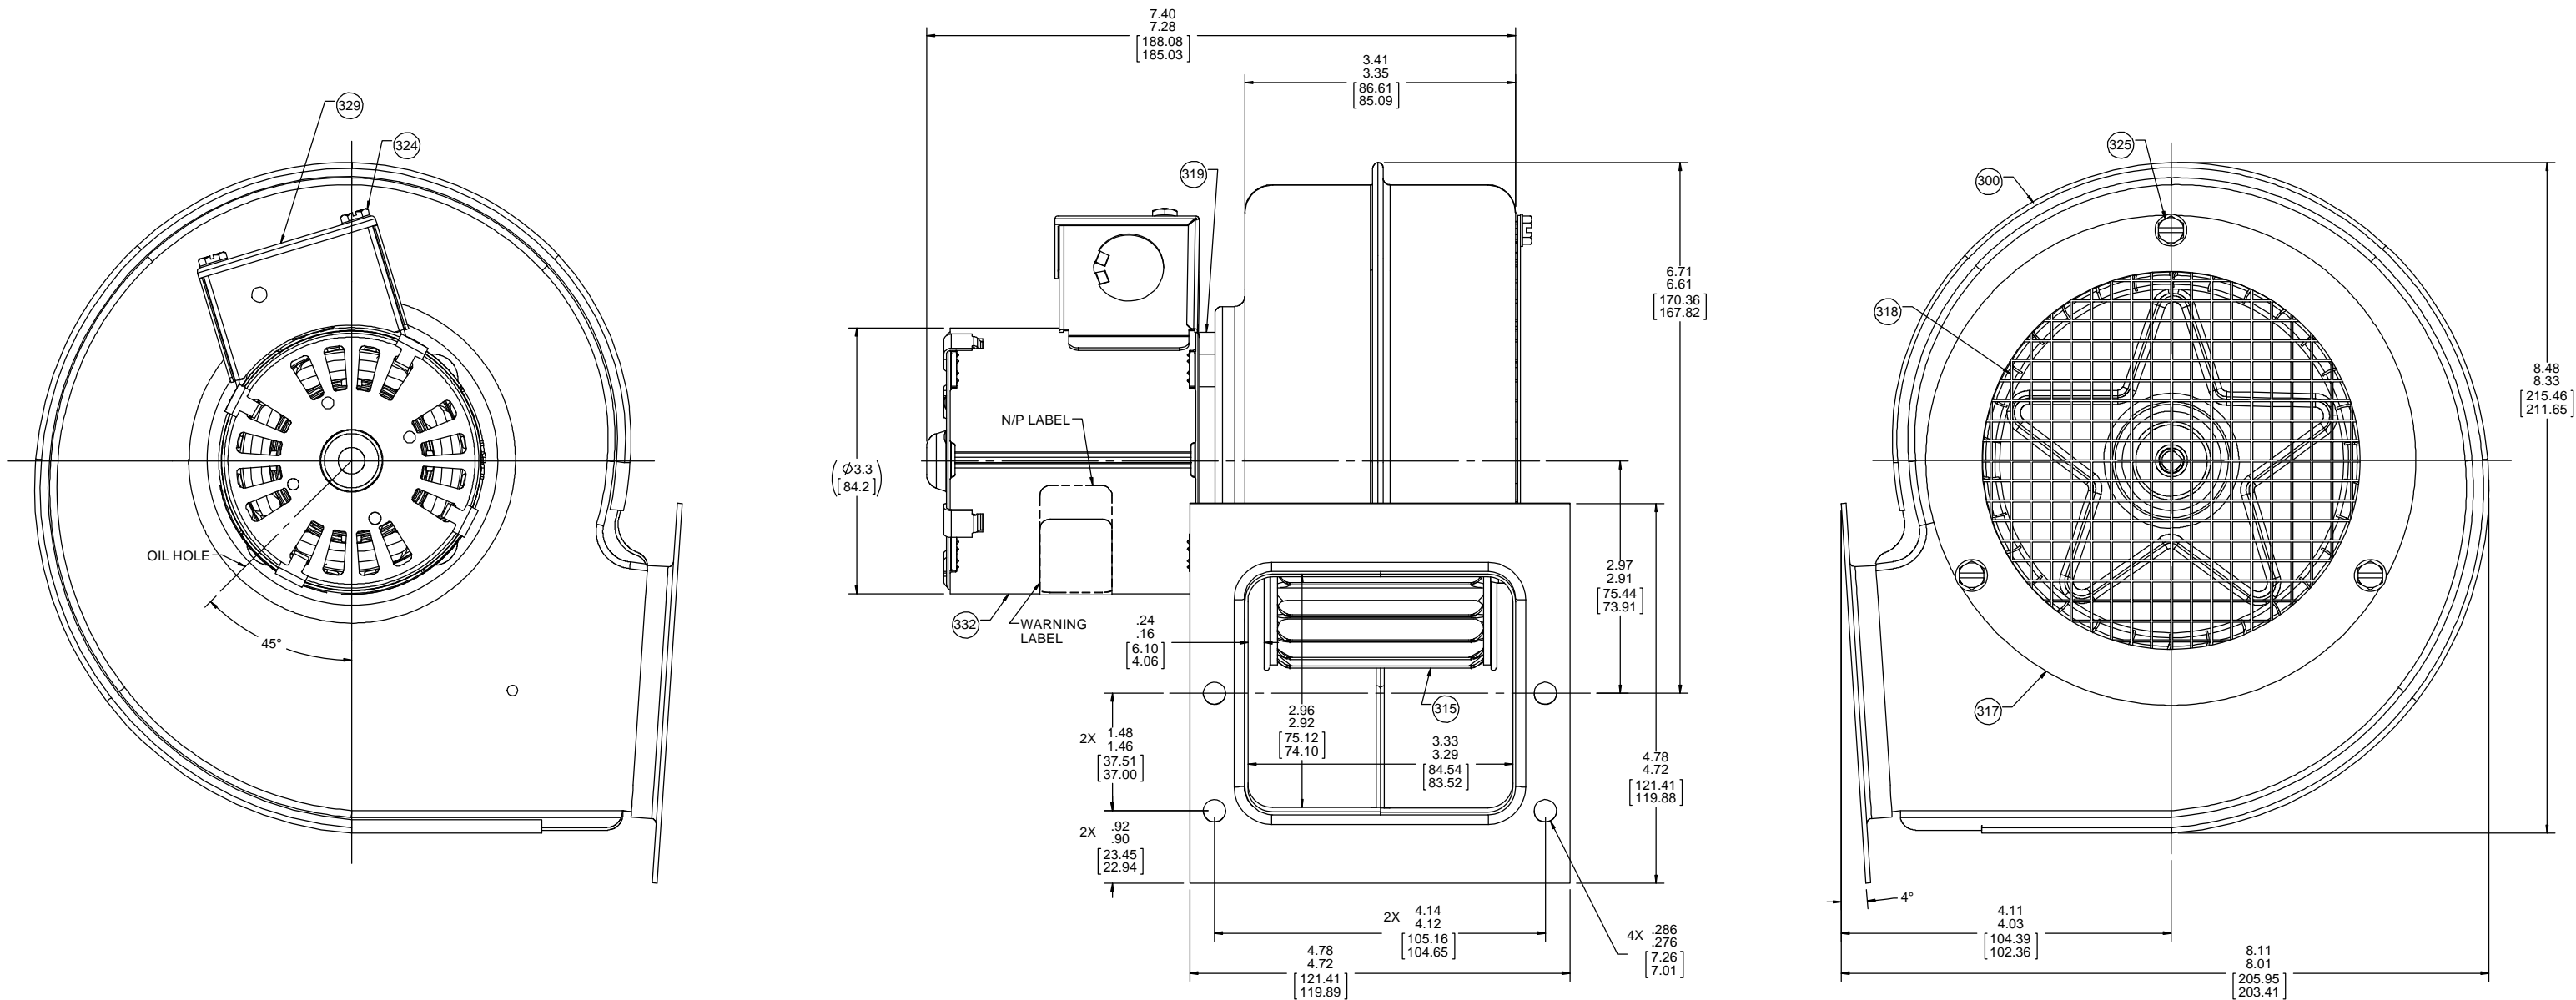

TYPICAL PERFORMANCE TEST DATA IN FREE AIR AT 220 VOLTS 60 Hz			
	RPM	WATTS	AMPS
	1530	58	.40
BLOWER WEIGHT LBS.			ENDPLAY .050/.010 [1.270/0.254]

DRAWING REVISION AA		REVISION BY KSA		DATE 3/6/2018		TOLERANCES UNLESS OTHERWISE SPECIFIED:				DRAWN BY KSA		DATE 3/6/2018		Regal Beloit America, Inc.			
ECO-0140513		APPROVED BY MLS		DATE 3/6/2018		DEC INCH ANGLE .X .001 (0.127) .X .01 (1.27) .X .005 (0.127) .X .01 (1.27) XXX .001 (0.127) REMOVE SURF. BREAK SHARP EDGES: .003 (0.1) (0.76 / .381) X 45 BURETS: R .02 (1.51) MACHINED SURFACES: .125 / 3/2 mm SHOWN IN [BRACKET] m/m				THIRD ANGLE PROJECTION		DATE 3/6/2018 APPROVED BY MLS		DESCRIPTION			
ECO DESCRIPTION <b>CHANGE PACKING NOTES &amp; REDRAW TO SW</b> PROPERTY AND ALL INFORMATION ON THIS DOCUMENT IS THE PROPERTY OF REGAL BELLOIT AMERICA, INC. NO PART OF THIS DOCUMENT INFORMATION MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM WITHOUT WRITTEN PERMISSION FROM REGAL BELLOIT AMERICA, INC. IF YOU ARE AN EMPLOYEE OF REGAL BELLOIT AMERICA, INC. YOU ARE NOT TO REPRODUCE OR TRANSMIT THIS INFORMATION TO ANY OTHER PERSON, CORPORATION OR OTHER ENTITY. DUPLICATED, AVOID USE, EXCEPT AS SPECIALLY AUTHORIZED BY REGAL BELLOIT AMERICA, INC. FOR BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO RESTRICTIONS UNDER APPLICABLE EXPORT CONTROLS, LAWS AND REGULATION.												REFERENCE R 02.151		MATERIAL ALUMINUM		PROCESS/FINISH BLACK	
SIZE DRAWING NUMBER <b>70633393</b>										SHEET 1 OF 1							