
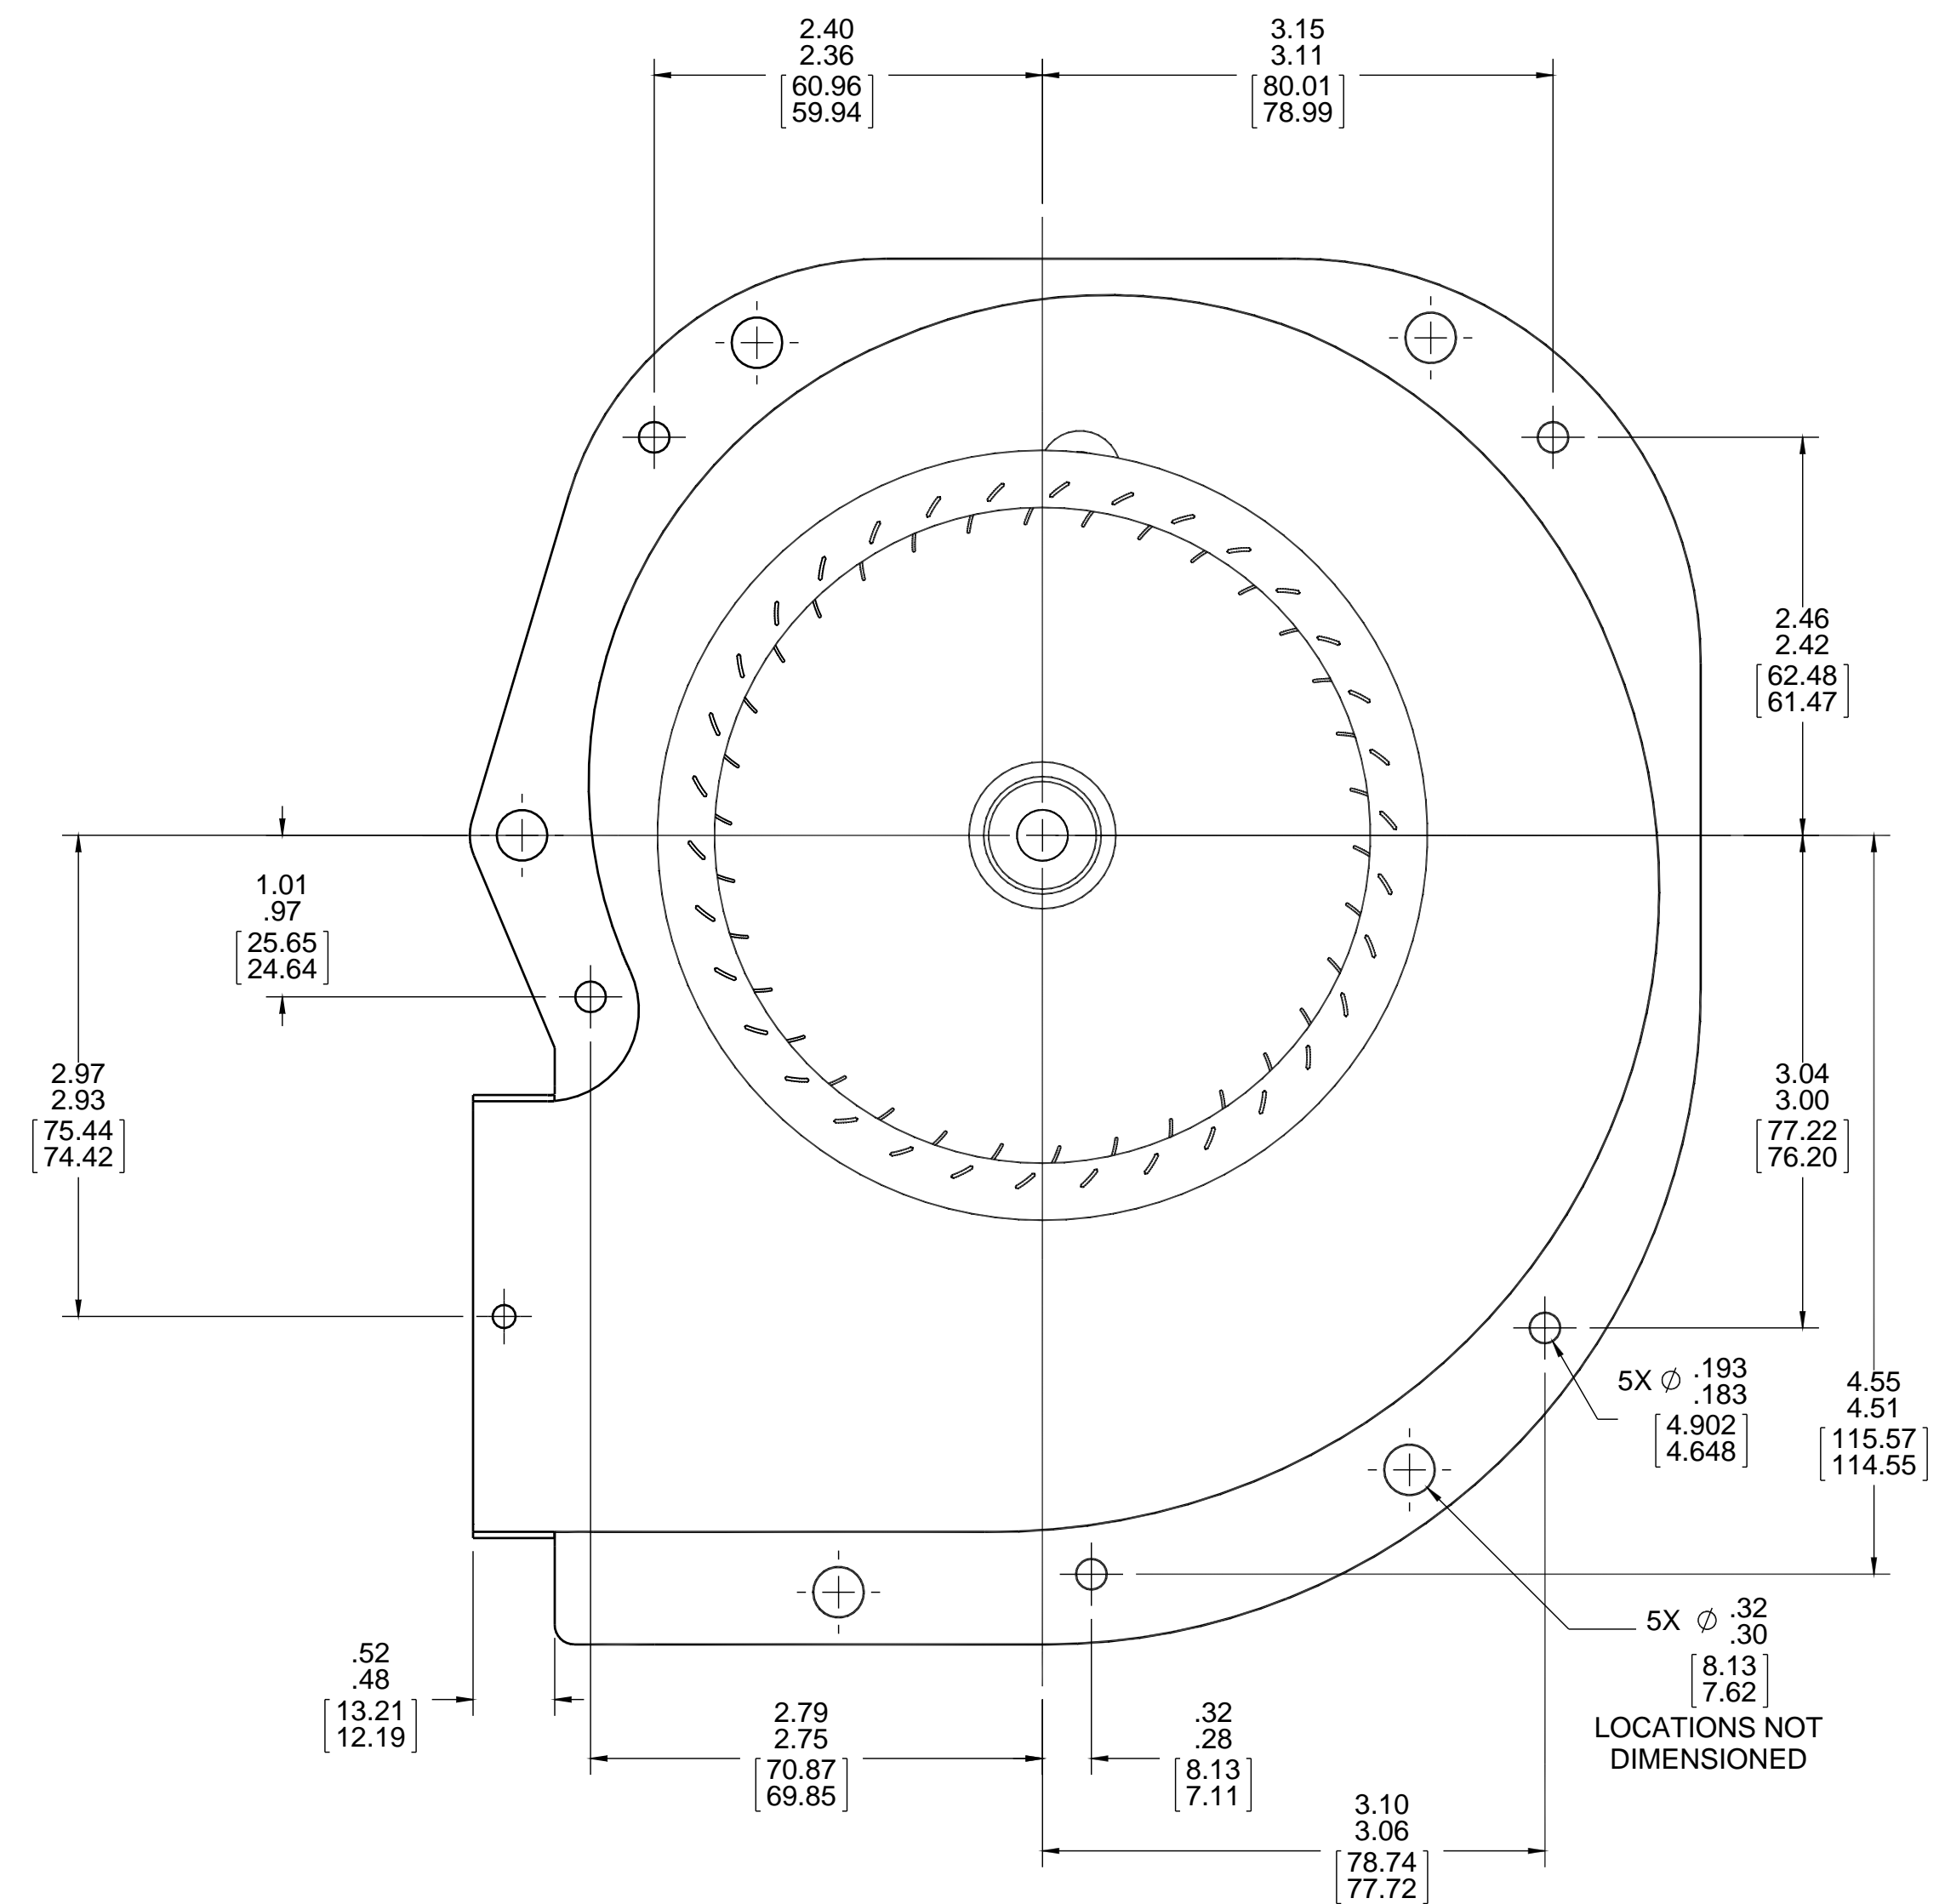
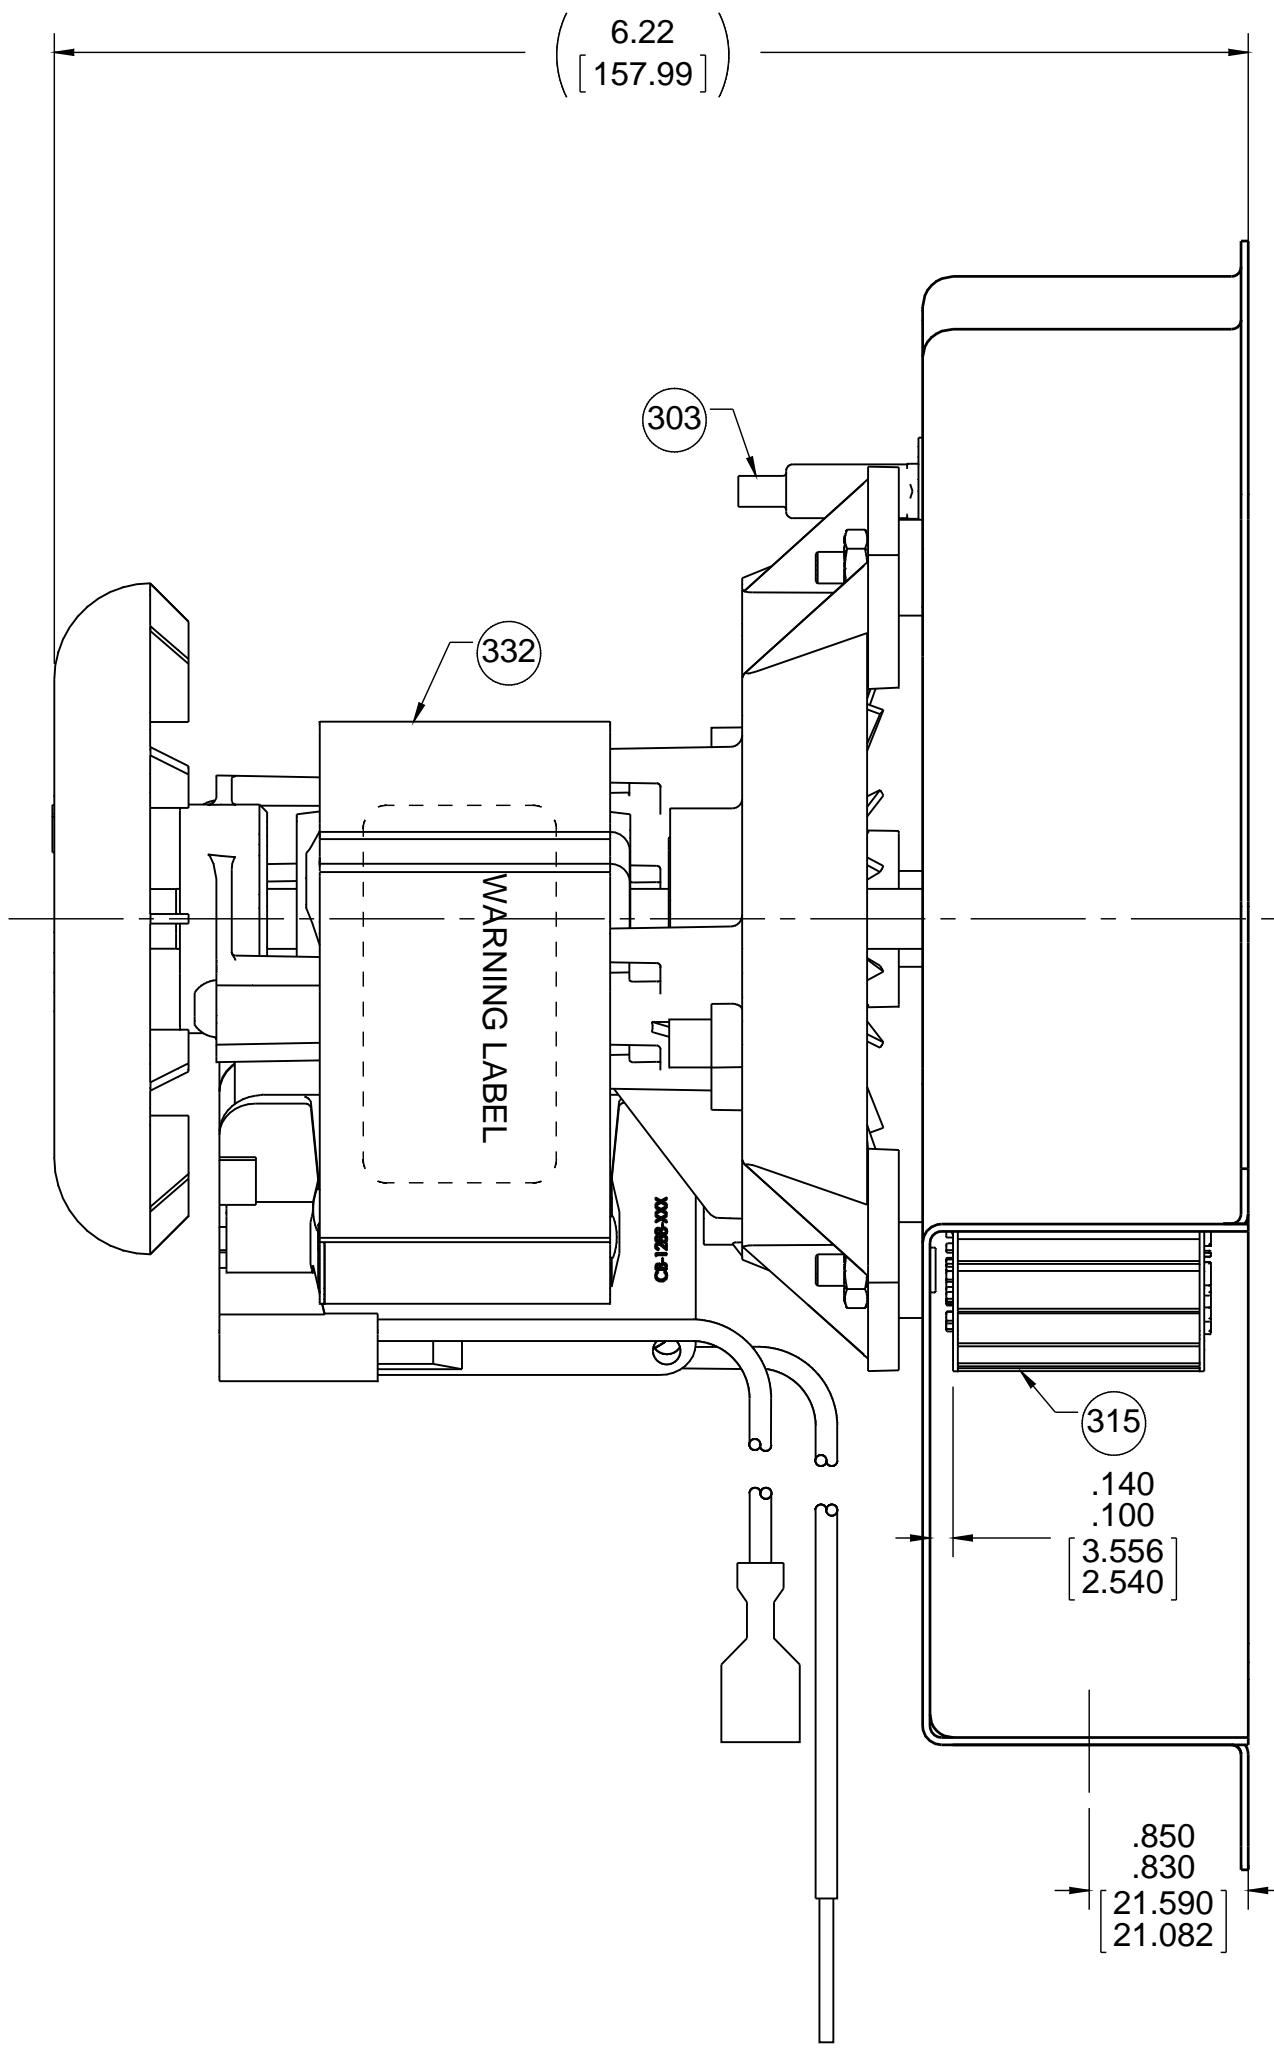


THERMALLY PROTECTED CLASS "B" INSULATION SEALED BALL BEARING 416 SS SHAFT

APPLICATION:		B	LA	FR	A	S	C	E	B	A
CUSTOMER:	FASCO DIST.	HS	58	4	8	X	06	OS	5	0
CUSTOMER PN:	A160									

- NOTES:
1. INSTECTION TEST FIXTURE IS REQUIRED.
  2. STATIC TAP READING IS -1.08 MINIMUM CORRECTED TO STANDARD AIR (0.075 LB/FT<sup>3</sup>) WITH A 1 7/8" INLET RESTRICTOR.
  3. PACK 1 PER CONTAINER, 12 CONTAINERS PER LAYER, 4 LAYERS PER PALLET, 48 MAX. AMOUNT PER PALLET. PACKING ASSY. 87855084 AND 88834200
  4. CARTON LABELS MUST ALL FACE ONE FIRECTINOS TOWARD THE OPEN END OF THE PALLET. SEE 88834408.
  5. NO PACKING TAPE OVER CARTON LABEL.

LEAD MATERIAL  
 18 GA. 125°C, 2/64 INSUL.  
 EPDM, (1) WHITE  
 23.00/21.00 [584.20/533.40]  
 W/ .84/.69 [21.37/17.53] STRIP  
 AND (1) BLACK  
 14.00/12.00 [355.60/304.80]  
 W/ FSPADE TERM. 89034025  
 AMP 2-520263-2

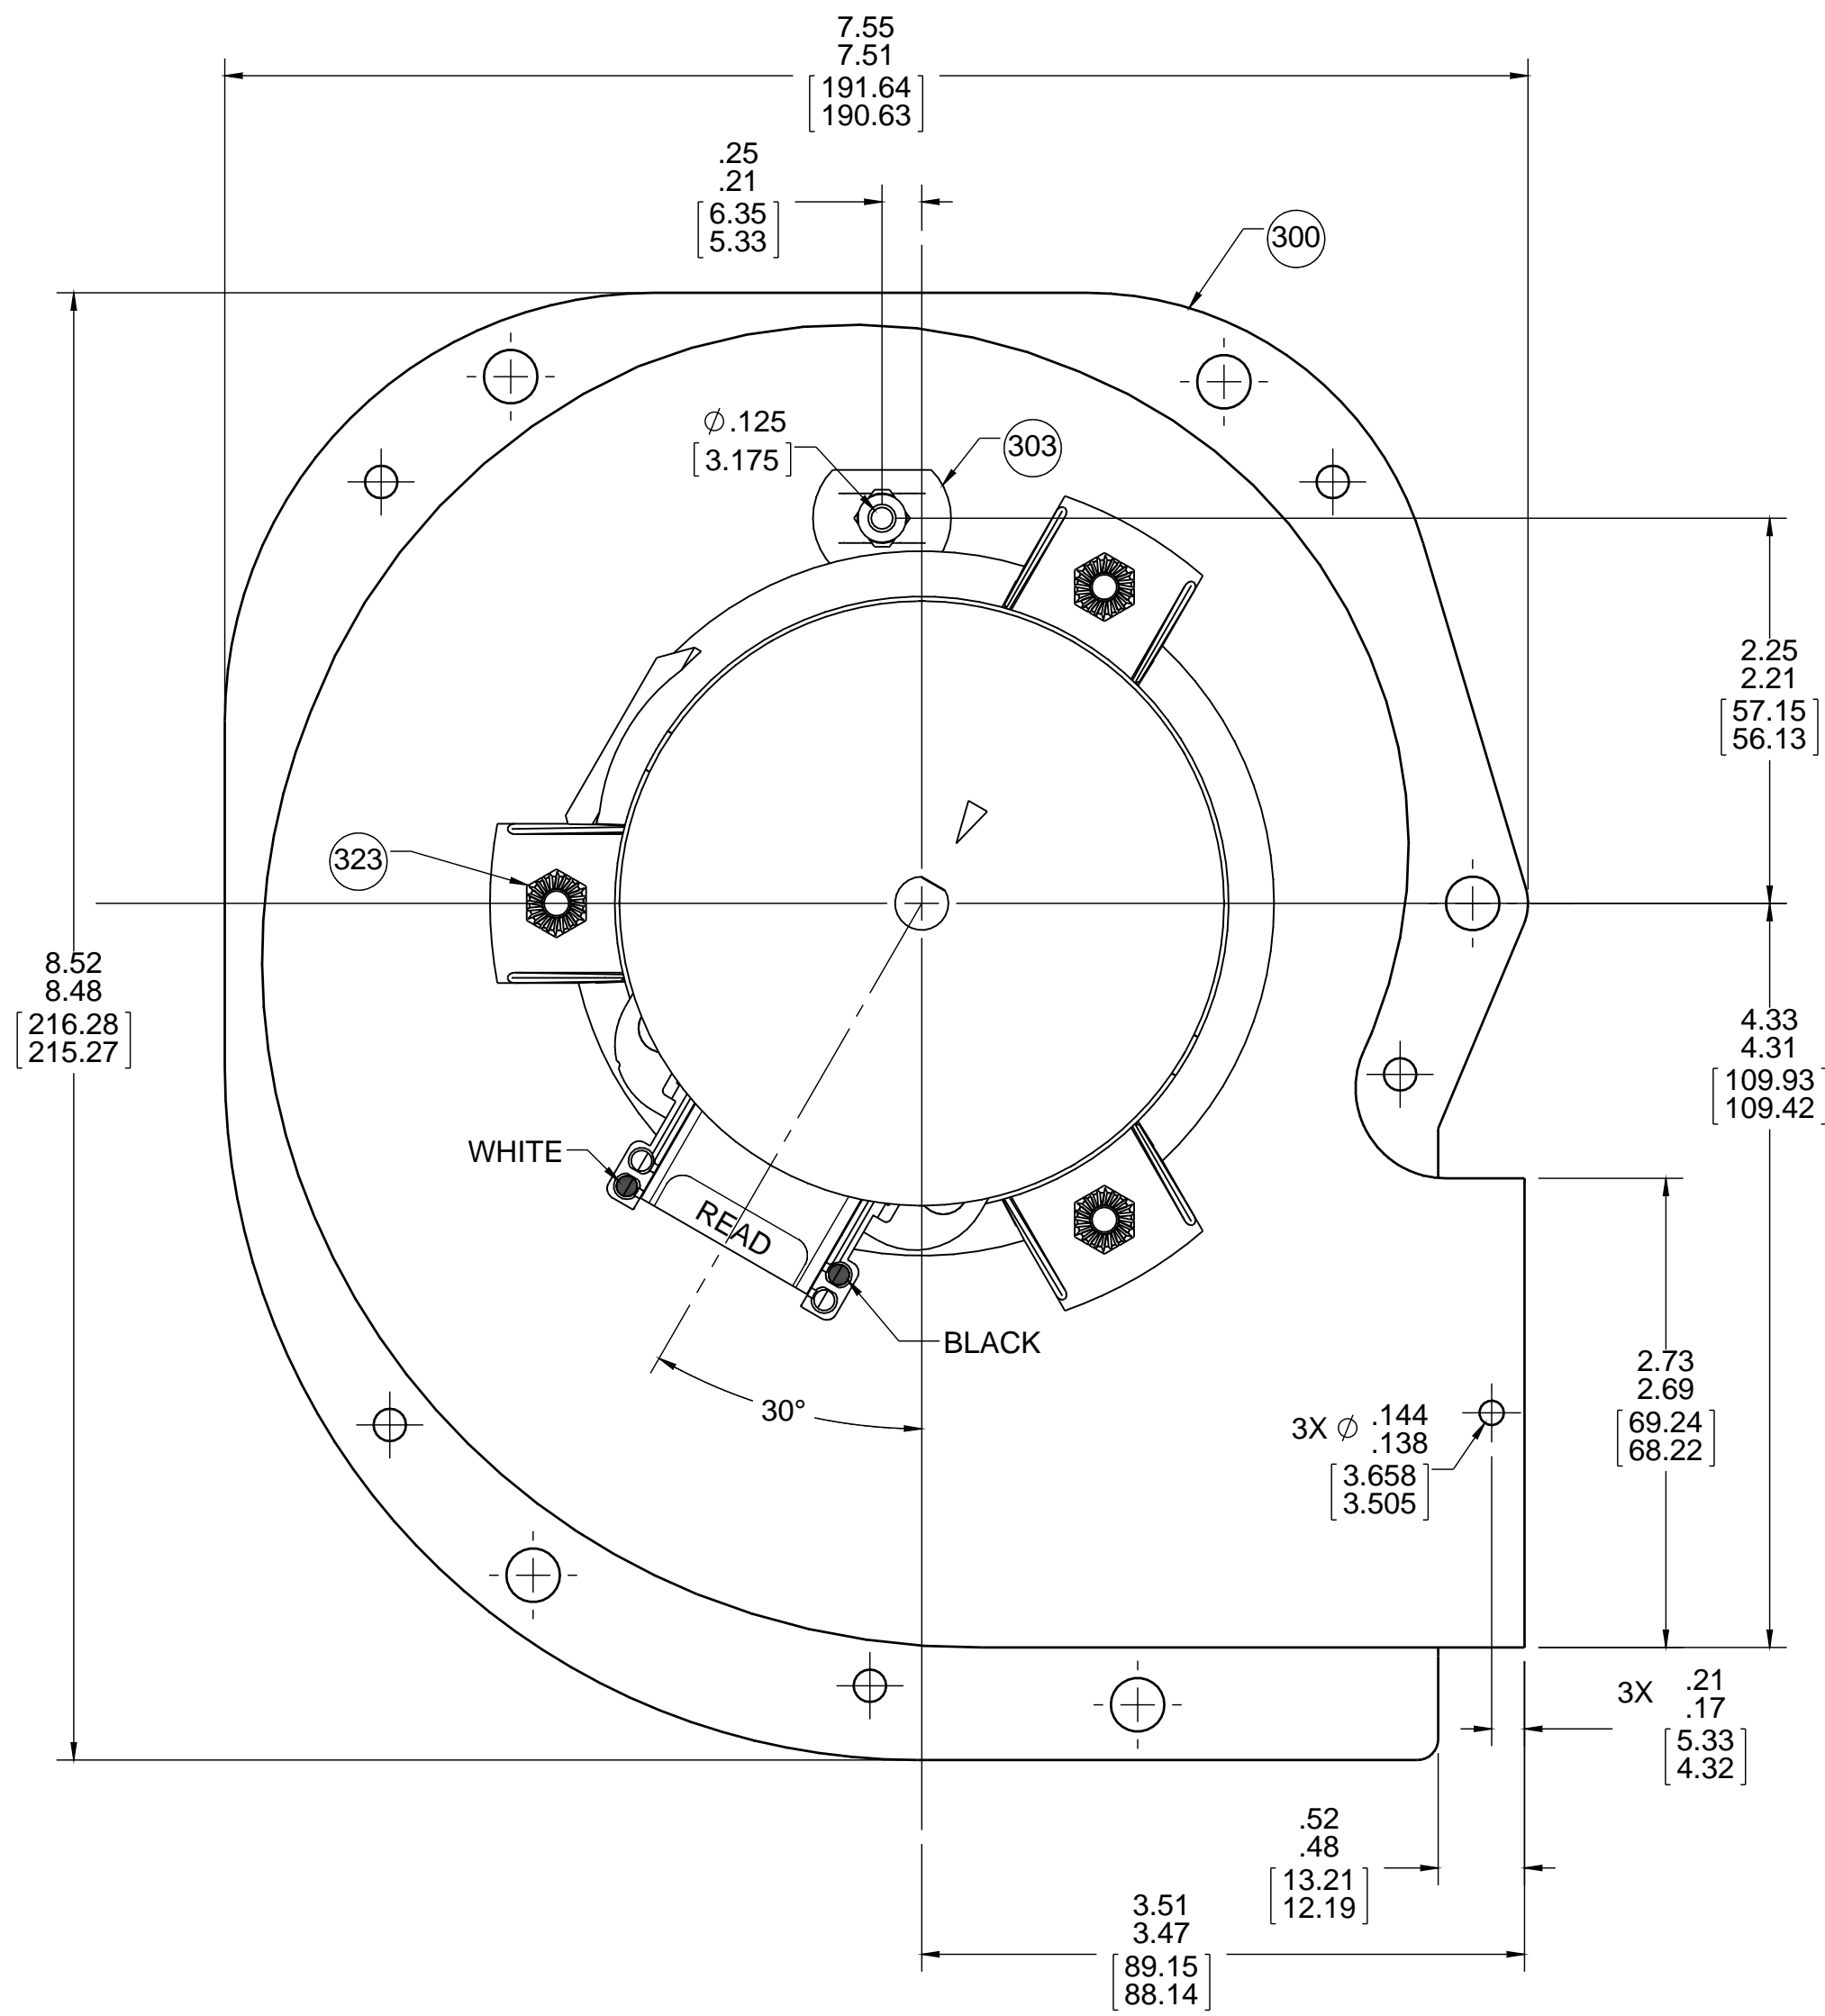

TYPICAL PERFORMANCE TEST DATA WITH 1 7/8" INLET RESTRICTOR AT 115 VOLTS 60 Hz			
	RPM	WATTS	AMPS
	2970	80	1.35
BLOWER WEIGHT			ENDPLAY .XX/XX
			4.75 LBS.

DRAWING REVISION	REVISION BY	DATE	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN BY	REGAL™ Regal Beloit America, Inc.
N	JMG	05/04/2016	DEC. INCH. mm ANGLE	JMG	
ECO-0099063	APPROVED BY	DATE	.XX +0.1 [-0.25]	DATE	05/04/2016
	MLM	05/04/2016	.XXX +0.01 [+0.25]	APPROVED BY	MLM
			.XXX +0.005 [+0.127]	DATE	05/04/2016
			.XXX +0.0005 [+0.0127]	REFERENCE	
			REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [0.076/.381] X 45°	MATERIAL	
			CORNER FILLETS: R.02 [5.1]	PROCESS/FINISH	NATURAL
			MACHINED SURFACES: 125/ INCH √ mm 32/ mm SHOWN IN [BRACKETS]	SIZE	D
			THIRD ANGLE PROJECTION	DRAWING NUMBER	70581314
				SHEET	1 OF 1