







- NOTES:
1. IMPELLER MUST BE BECKETT AIR F115-34S.
  2. IMPELLER LOCATION MEASURED FROM INSIDE OF THE MOTOR SHELL ON THE DISHED AREA TO THE BACK OF THE IMPELLER.
  3. INSPECTION TEST FIXTURE IS REQUIRED.
  4. STATIC TAP READING IS TO BE 1.20-1.55 MINIMUM ON HIGH SPEED CORRECTED TO STANDARD AIR (0.075 LB/FT<sup>3</sup>).
  5. SERIAL NUMBER.
  6. APPLY 61304710 LABEL TO MOTOR ONLY TO READ FROM BACK OF MOTOR.
  7. PACK 1 PER CONTAINER, 48 MAX. PER PALLET, PACKING ASSY. 87854915, 12 CONTAINERS PER LAYER, 4 LAYERS PER PALLET, PER 88834200 AND 88834408.
  8. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE 88834408.
  9. NO PACKAGING TAPE OVER CARTON LABEL.
  10. BLOWER - NATURAL, MOTOR - FLAT BLACK.

Uncontrolled Copy

THERMALLY PROTECTED  
CLASS 'B' INSULATION  
416 SS SHAFT  
SEALED BALL BEARING

APPLICATION:	GAS FURNACE	B	LA	FR	A	S	C	E	B	A
CUSTOMER:	FASCO DIST.	GS	21	47	V	06	FS	6	0	0
CUSTOMER PN:	A210									

LEAD MATERIAL  
18 GA. 125°C 2/64 INSUL.  
X-LINKED POLY.  
(1) WHITE, (1) BLACK, (1) RED  
8.00/6.00 [203.20/152.40]  
W/SOCKET TERMS.  
AMP 350536-1

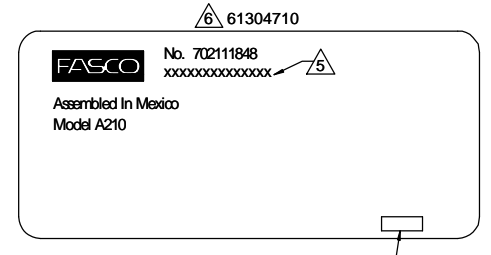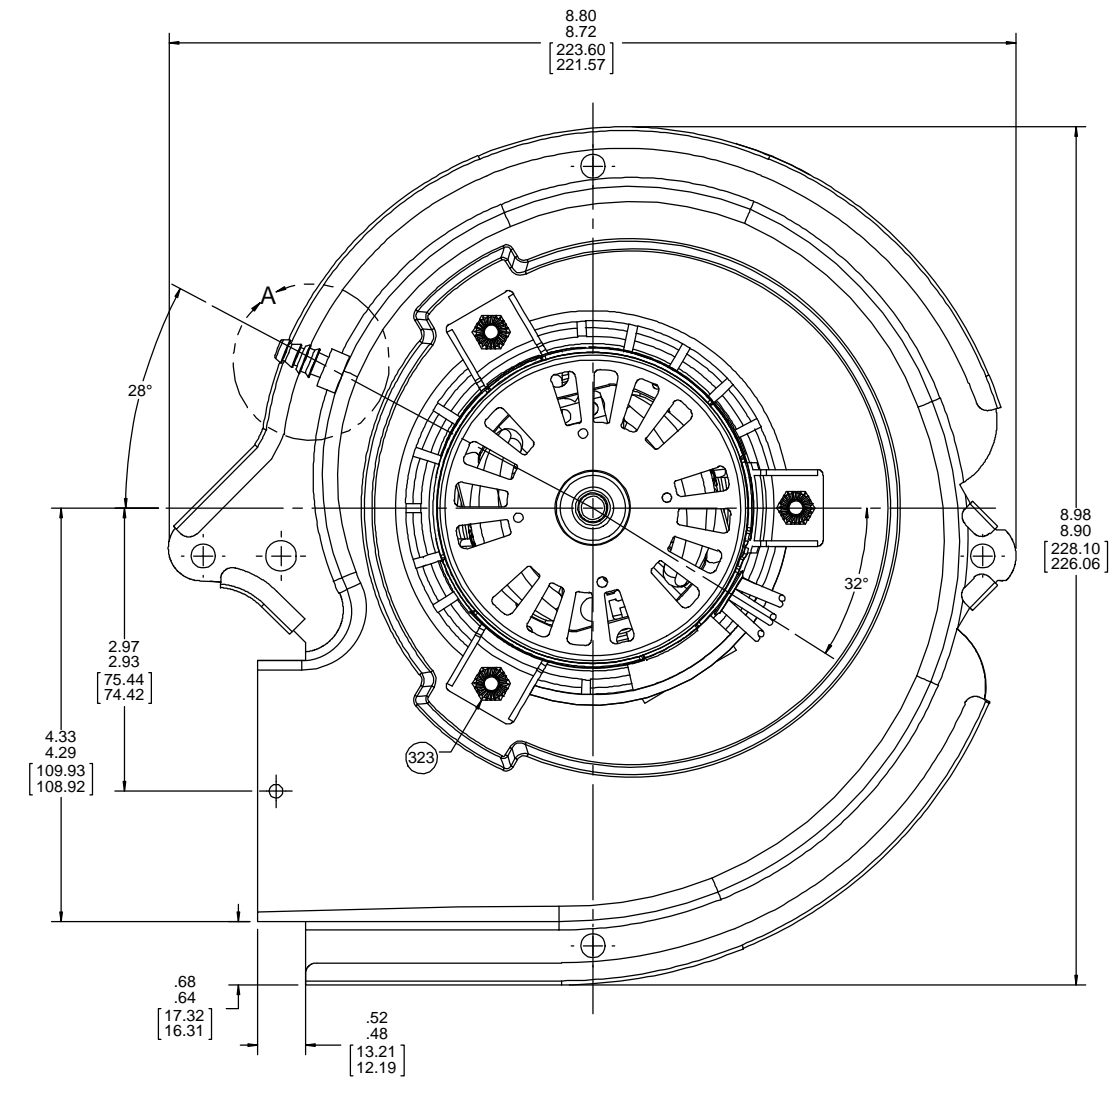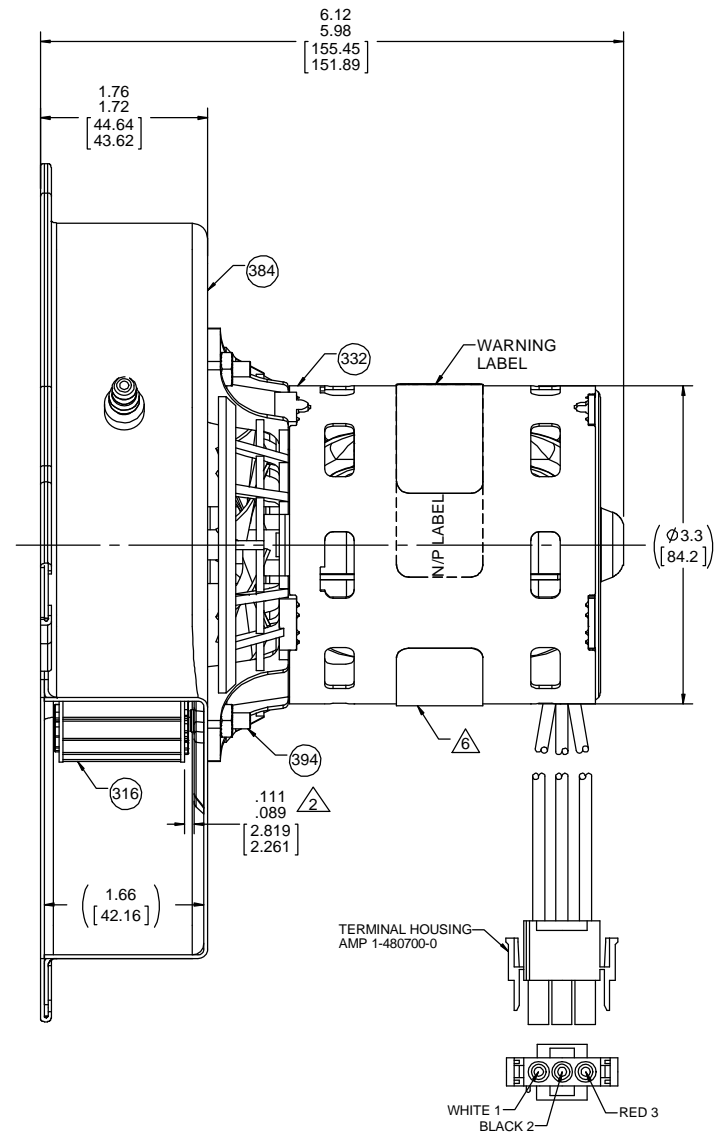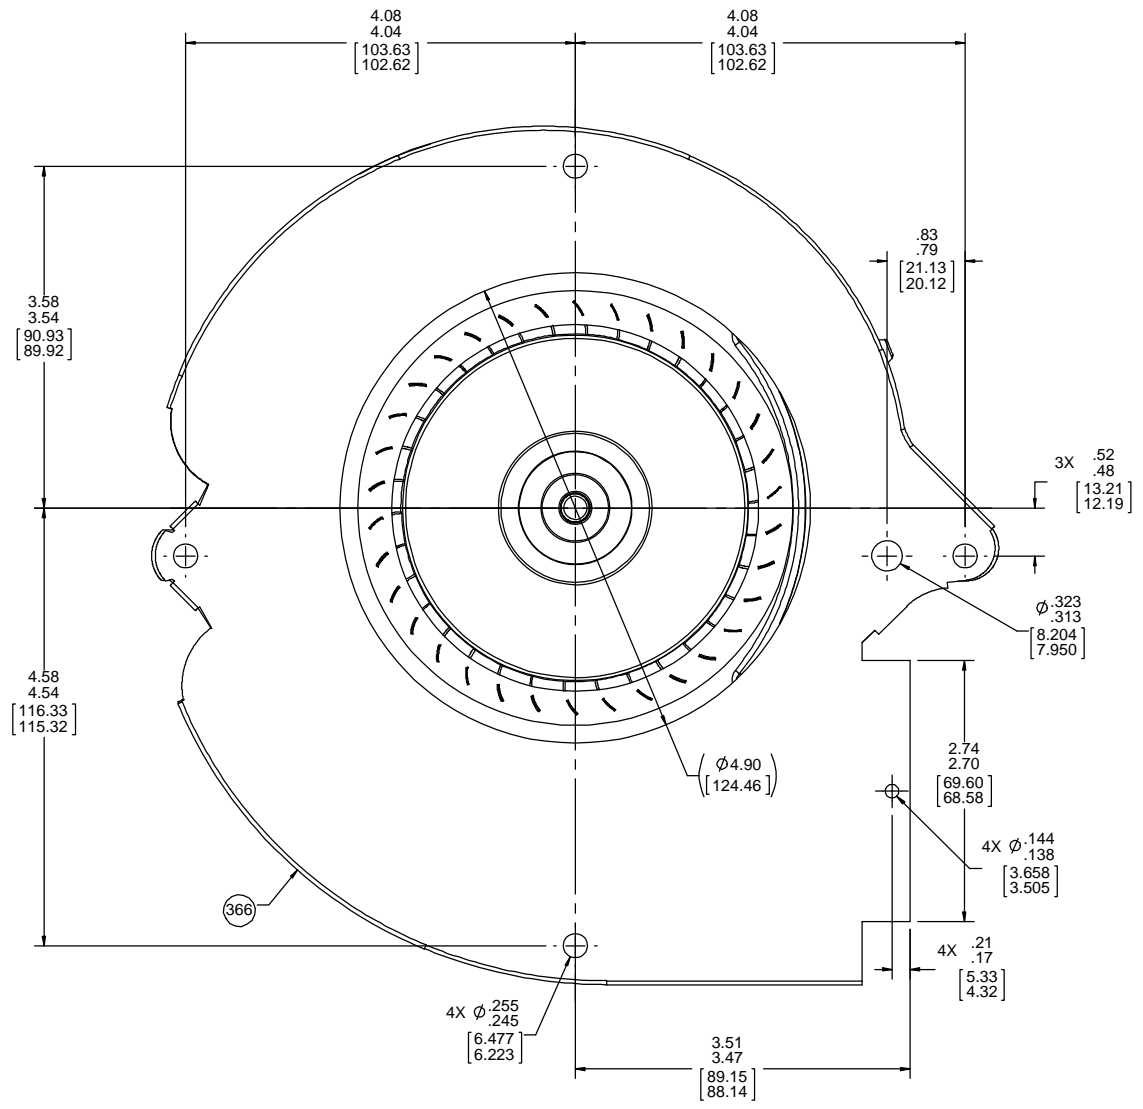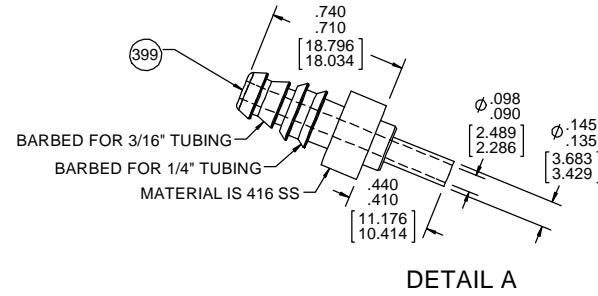

AVERAGE PERFORMANCE TEST DATA WITH A 1/16 INLET RESTRICTOR			
AT 115 VOLTS 60 Hz			
	RPM	WATTS	AMPS
HIGH	3290	109	1.56
LOW	3000	42	.56
BLOWER WEIGHT 5 1/2 LBS.			ENDPLAY .XX/XX

DRAWING REVISION AA	REVISION BY MLS	DATE 8/29/2017	TOLERANCES UNLESS OTHERWISE SPECIFIED: DEC. INCH mm ANGLE .X $\pm$ 0.1 [2.5] $\pm$ 1° .XX $\pm$ 0.01 [0.25] .XXX $\pm$ 0.005 [0.127] XXXX $\pm$ 0.0005 [0.0127]	DRAWN BY MLS	DATE 8/29/2017	APPROVED BY KSA	DATE 8/29/2017	DESCRIPTION OUTLINE	MATERIAL PROCESS/FINISH SEE NOTES
ECO-0129732	APPROVED BY KSA	DATE 8/29/2017	REMOVED BURRS & BREAK SHARP EDGES: .003/.015 [0.076/.381] X 45° CORNER FILLETS: R.02 [5.1] MACHINED SURFACES: 125 INCH/ MIL mm SHOWN IN [BRACKETS]	THIRD ANGLE PROJECTION	SIZE DRAWING NUMBER 70211848	SHEET 1 OF 1	Regal Beloit America, Inc.		