

NOTES:

1. INSPECTION TEST FIXTURING REQUIRED.
2. AFTER TESTING, COIL LEADS INSIDE CONDUIT BOX, AND SECURE COVER WITH PC 324 SCREWS.
3. PACK 1 PER CONTAINER, 100 MAX. PER PALLET, PACKING ASSY. 87854000, 20 CONTAINERS PER LAYER, 5 LAYERS PER PALLET, P.S. 88834200 AND P.S. 88834408.
4. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 88834408.
5. NO PACKING TAPE OVER CARTON LABEL.

APPLICATION


THERMALLY PROTECTED

B	LA	FR	A	S	C	E	B	A
17	21	30	F	05	AS	5	3	0

CUSTOMER FASCO DIST.

CUSTOMER PART NO. B24220

LEAD MATERIAL  
 18 GA. 125°C 2/64 INSUL.  
 X-LINKED POLY. (2) BLACK  
 14.00/12.00 IN. LONG  
 .56/.44 IN. STRIP

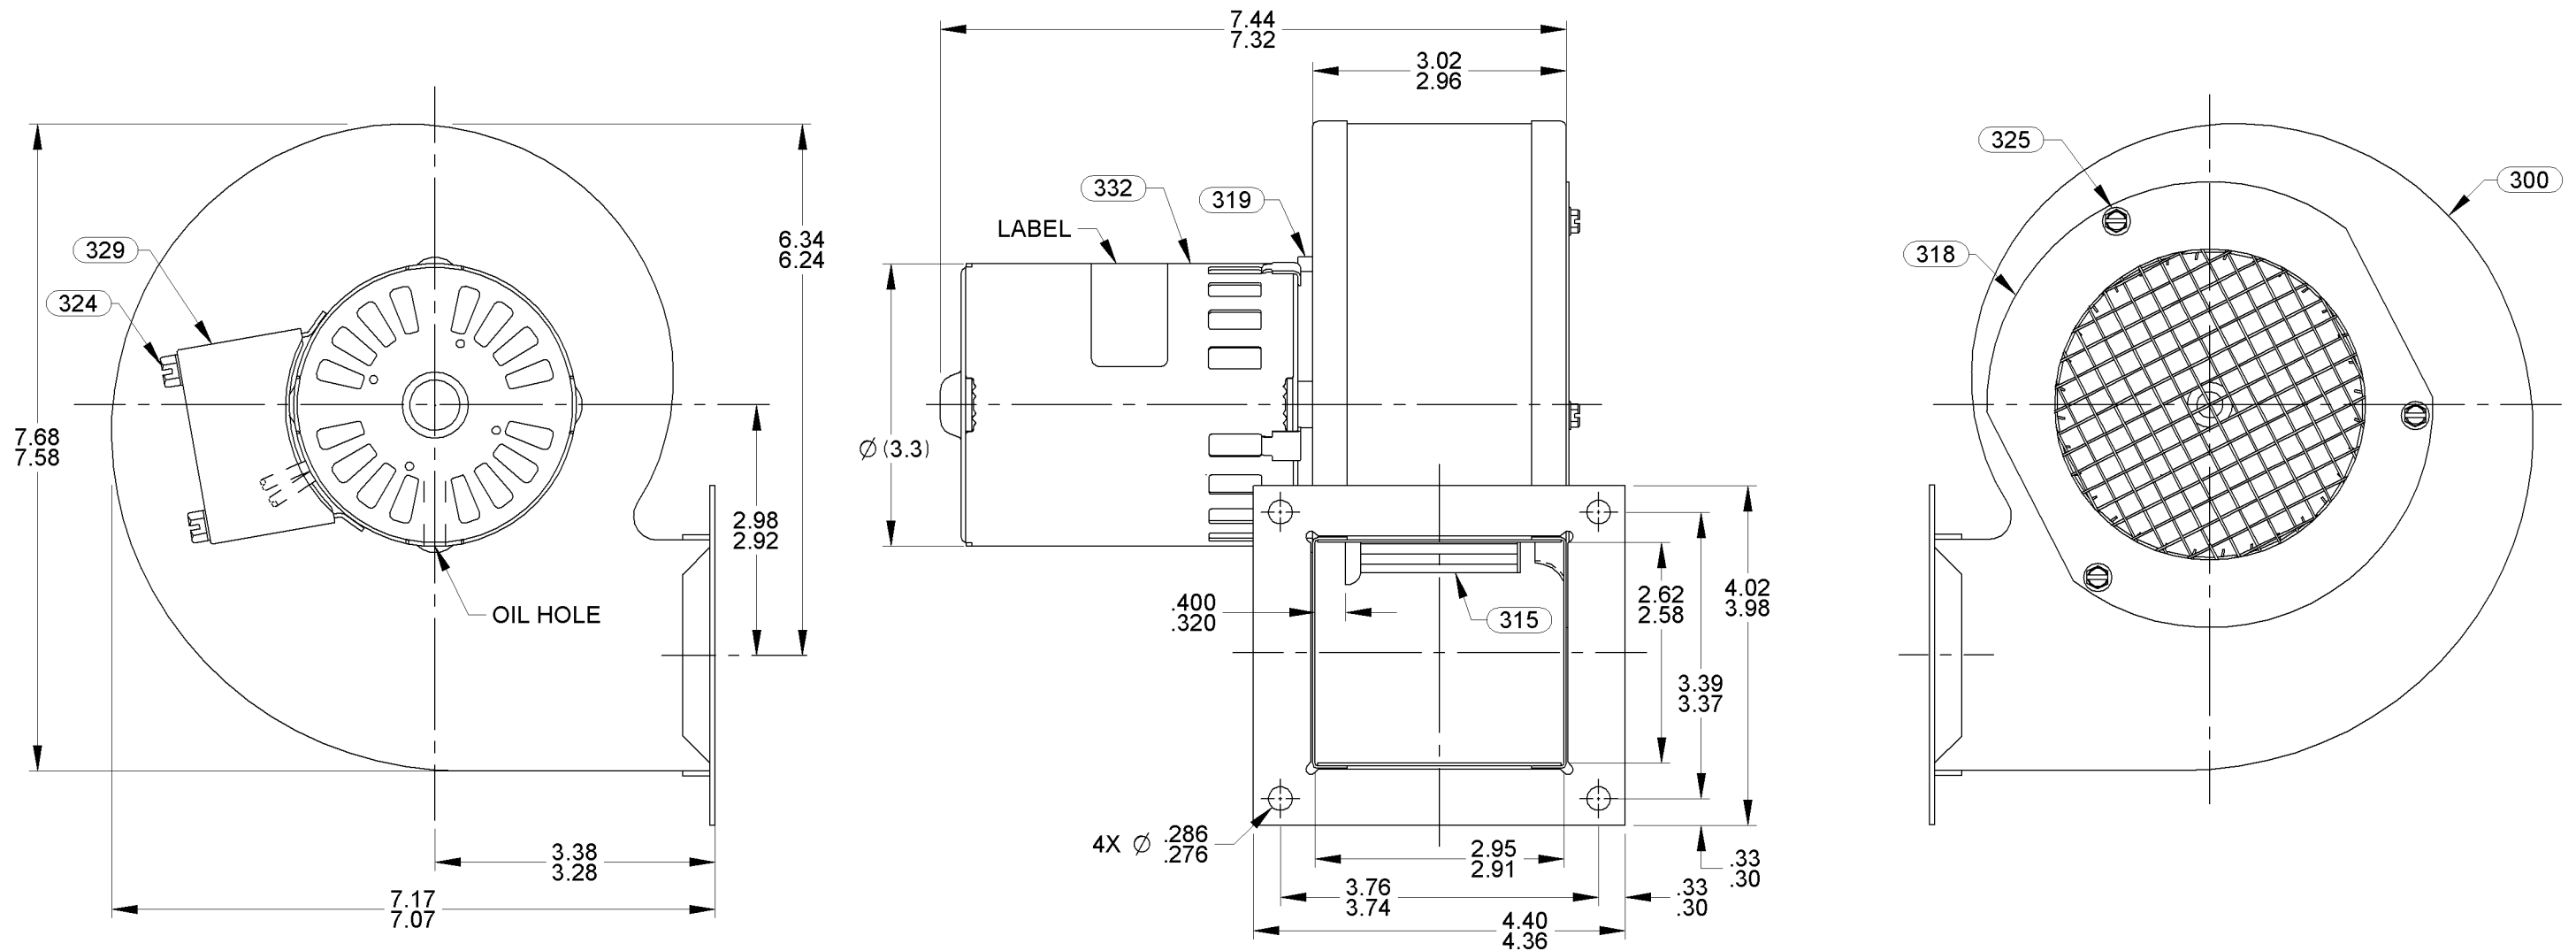

TYPICAL PERFORMANCE TEST DATA WITH 2.06" INLET RESTRICTOR.

AT	115	VOLTS	60	HZ.		
ECO. NO.	REV.	DATE	APPROVAL	R.P.M.	WATTS	AMPS
4008553	37	3/11/2013	SDM/KSA	3293	82	1.09
4008774	38	4/2/2013	SDM/KSA			
4011129	39	1/3/2014	SDM/NJP			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:  
 FRACTIONS ± 1/16  
 DECIMALS XX ± .01  
 ANGLES XXX ± .005

**FASCO** FASCO MOTORS GROUP  
 AC MOTOR/BLOWER DIVISION

CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.

TITLE  
**BLOWER ASSEMBLY**

SIZE **B** DWG. NO. 7021 4399 REV. 39

DO NOT SCALE DRAWING SHEET 1 OF 1

ECO. NO.	REV.	DATE	APPROVAL
4008553	37	3/11/2013	SDM/KSA
4008774	38	4/2/2013	SDM/KSA
4011129	39	1/3/2014	SDM/NJP

BLOWER WEIGHT 5.0 LBS. END PLAY .050/.010 FINISH COLOR BLACK