


NOTES:

1. COIL LEADS INSIDE OUTLET BOX AND SECURE COVER WITH PC 324 SCREW AFTER TESTING.
2. NO KNOCKOUTS REMOVED.
3. TRAP INLET SCREEN UNDER INLET RING AND SECURE WITH PC 325 SCREW.
4. SINGLE: PACK 1 PER CONTAINER, 150 MAX. PER PALLET, PACKING ASSY. 87854000, 30 CARTONS PER LAYER, 5 LAYERS PER PALLET, P.S. 88834200 AND P.S. 88834408.
5. BULK: PACK 20 PER CONTAINER, 240 MAX. PER PALLET, PACK ASSY. 87854376 P.S. 88834200 AND P.S. 88834408.
6. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 88834408.
7. NO PACKAGING TAPE OVER CARTON LABEL.

APPLICATION	B	LA	FR	A	S	C	E	B	A
THERMALLY PROTECTED	16	21	30	V	02	AF	5	1	0
CUSTOMER	FASCO DIST.								
CUSTOMER PART NO.	B75								

GROUND LEAD  
 18 GA. 125°C 2/64 INSUL.  
 X-LINKED POLY. GRN/YEL  
 8.00/6.00 IN. LONG  
 .56/.44 IN. STRIP

LEAD MATERIAL  
 18 GA. 125°C 2/64 INSUL.  
 X-LINKED POLY. BLK  
 8.00/6.00 IN. LONG  
 .56/.44 IN. STRIP

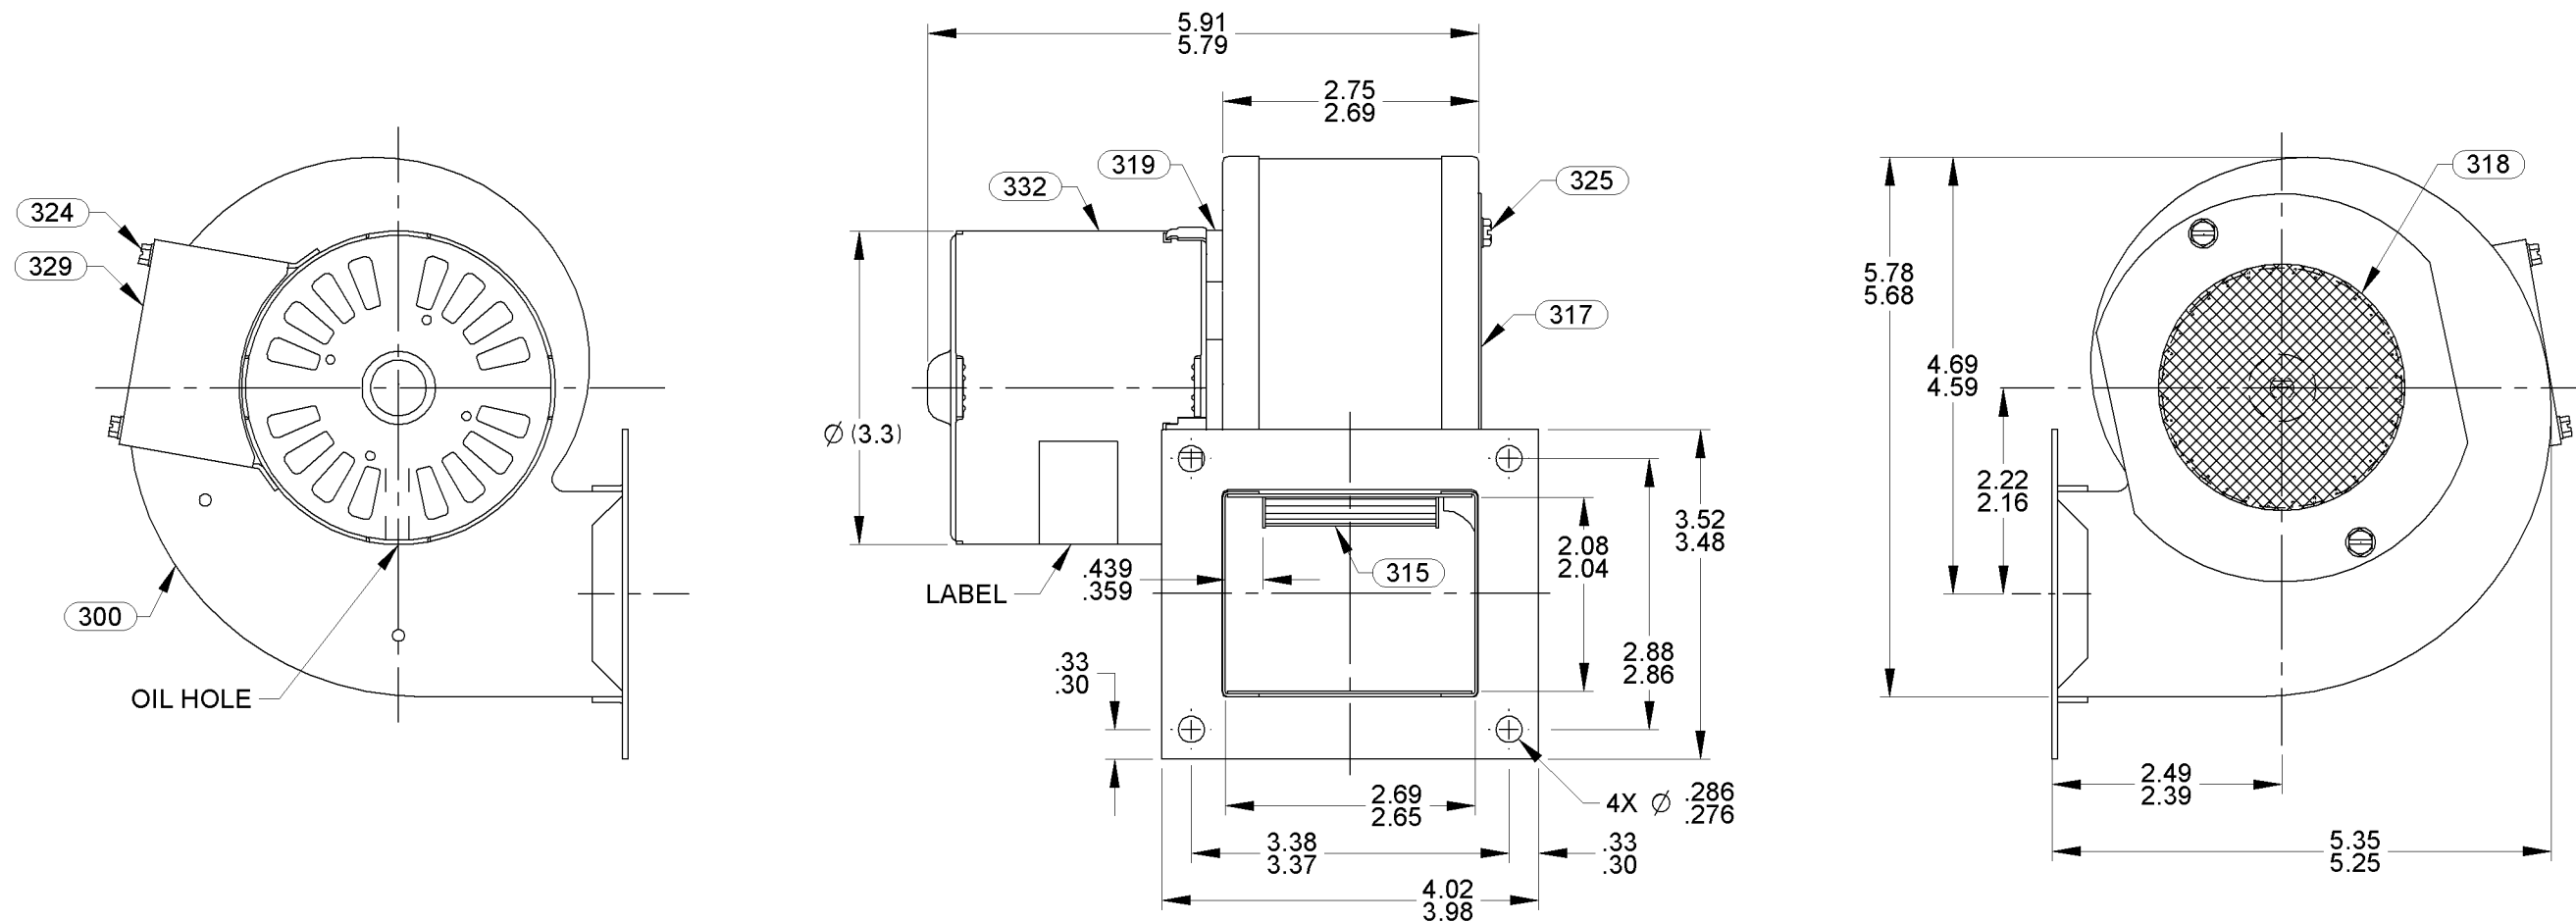

TYPICAL PERFORMANCE TEST DATA AT FREE AIR  
 AT 115 VOLTS 60 HZ.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:  
 FRACTIONS ± 1/16 DECIMALS XX ± .01 ANGLES ± 1°  
 XXX ± .005

ECO. NO.	REV.	DATE	APPROVAL
4001861	44	04/29/11	MLM/PLA
4003708	45	11/11/11	BGP/SMC
4008426	46	2/26/2013	SDM/BGP
4010880	47	12/3/2013	MLS/SDM

R.P.M.	WATTS	AMPS
3160	37	.50
BLOWER WEIGHT 3 1/2 LBS.		END PLAY .050/.010

APPROVALS	DATE
DRAWN JMH	06/25/2003
CHECKED PLA	06/25/2003
FINISH COLOR BLACK	

**FASCO** FASCO MOTORS GROUP  
 AC MOTOR/BLOWER DIVISION

CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.

TITLE BLOWER ASSEMBLY		
SIZE B	DWG. NO. 7021 2367	REV. 47
DO NOT SCALE DRAWING		SHEET 1 OF 1