


04	CONVERT TO SOLID EDGE, UPDATE STANDARD NOTES AND DIMENSIONS.	SMM 6-10-05	05	UPDATE NAMEPLATE FORMAT, B.O.M. CHANGE & UPDATE TO CURRENT STANDARDS.	KSA 01-09-09	06	REVISED PACKING AND ADDED CARTON LABEL NOTES	4005702 MLM 06/08/12	STANDARD TOLERANCES: ANGULAR +/- 1 DEGREE 2 PLACE DECIMAL +/- .01 3 PLACE DECIMAL +/- .005
----	--	-------------	----	---	--------------	----	--	-------------------------	---

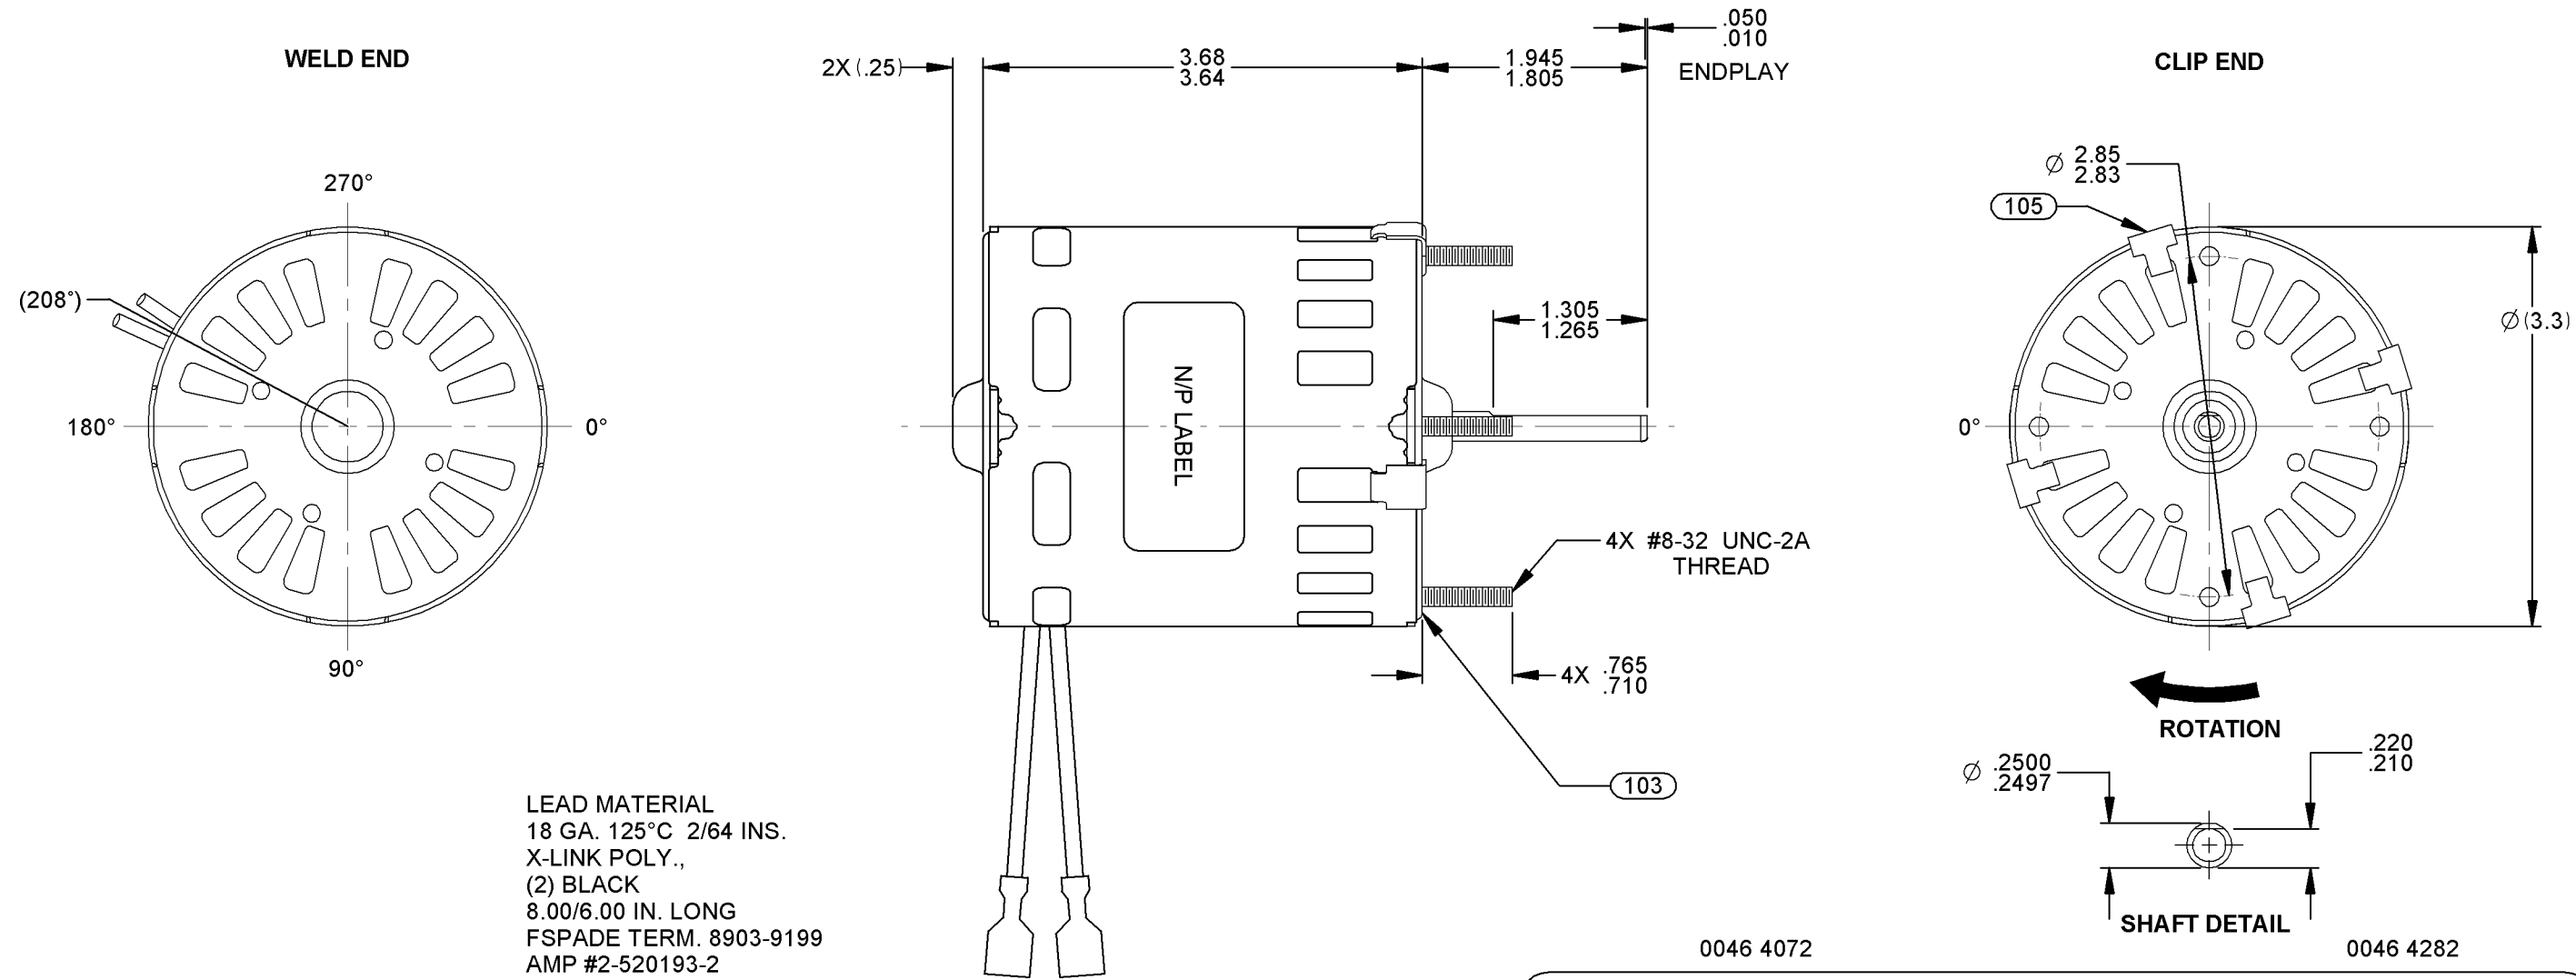

LEAD MATERIAL
18 GA. 125°C 2/64 INS.
X-LINK POLY.,
(2) BLACK
8.00/6.00 IN. LONG
FSPADE TERM. 8903-9199
AMP #2-520193-2

NOTES:
1. NO PACKAGING TAPE OVER CARTON LABEL.

FASCO Fasco Industries, Inc. Motor Division

Assembled In Mexico

No. 71730296 Type U73B1 T.P. AO
115 V 60 Hz Class B
0.7 A 1300 RPM 1/55 HP
Model D1110 Max Amb: 40° C
(1 spd.) LR6319

SAFETY WARNING

This Motor Must Be Grounded in Accordance With Local Or National Electrical Codes To Prevent Possible Injury Due To Electrical Shock

6129 9553

FRONT SHAFT POSITION	* TYPICAL PERFORMANCE AT 115 VOLTS 60 Hz											CUSTOMER: FASCO DIST.	FASCO FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION
	HORIZONTAL UP DOWN	MOTOR SPEED	IDLE			LOADED			LOCKED			BREAK	
R.P.M.			AMP.	WATT	IN.OZ.	R.P.M.	AMP.	WATT	IN.OZ.	AMP.	WATT	IN.OZ.	APPLICATION: POWER HUMIDIFIER
CUSTOMER APPROVAL:												MOTOR WEIGHT: 3.31 POUNDS	CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.
SIGNED:												ENVIRONMENT: DRY	MOTOR TYPE
DATE:												FINISH COLOR: BLACK	SHADED POLE
												DRAWN BY: S. M. MAGGARD	DRAWING NUMBER
												DATE DRAWN: 6-10-05	7173 0296
													B LA FR A S C E B A
													REV. 06

If Printed, this is an Uncontrolled Document.