

**LEAD MATERIAL**  
18 GA. 2/64 INS. 125°C.  
X-LINKED POLYETHYLENE

**LINE LEADS**  
9.00/7.00" W/STRIP .56/.44

**CAPACITOR LEADS**  
4.00/3.00"W/TERM.  
8903-4045 AMP #42742-2

**NOTES:**  
84 MAXIMUM MOTORS PER PALLET.  
MOTOR HAS 416-STAINLESS STEEL SHAFT.  
NO PACKAGING TAPE OVER CARTON LABEL.

00464072

00469105

6130 5568

**FASCO** Fasco Industries, Inc  
Motor Division

Assembled In Mexico  
No. 71902353 TYPE U90B1  
115 V 60 Hz 1000 RPM

T.P. AO  
Class B

Model D1141  
1/15-1/25-1/35 HP

Connection  
Wht — Common  
Blk — High  
Blu — Med  
Re — Low  
Brn —  
Brn —

Max Amb: 40°C  
Rot CCWLE  
1.7/1.3/1.0 A

4 MFD/370 VAC

61299553

**SAFETY WARNING**  
This motor must be grounded in accordance with local or national electrical codes to prevent possible injury due to electrical shock

**AVERTISSEMENT DE SÉCURITÉ**  
Ce moteur doit être fondée sur conformément à la réglementation locale ou national électrique codes pour prévenir d'éventuelles blessures en raison de choc électrique

APPLY IN A CONVENIENT LOCATION TO READ FROM CLIP END

CUSTOMER P/N: D1141	ENVIRONMENT: DRY										
CUSTOMER: FASCO DIST.	APPLICATION: FAN COIL										
	MOTOR WEIGHT: 5.75 LBS.										
CUSTOMER APPROVAL	FRONT SHAFT POSITION										
SIGNED: _____	HORIZONTAL	MOTOR TYPE	REFERENCE SAMPLE NUMBER								
		P.S.C	71902885								
DATE: _____	UP	B	LA	FR	A	S	C	E	B	A	
	DOWN	00	90	31	V	08	DJ	7	6	0	
TYPICAL PERFORMANCE AT 115 VOLTS 60 HZ		FULL LOAD		LOCKED		BREAK					
MOTOR SPEED	RPM	AMP	WATT	IN OZ	RPM	AMP	WATT	IN OZ	AMP	WATT	IN OZ
HIGH	1765	.62	44	48.4	1000	1.51	160	22.3	1.76	184	55.6
MED	1764	.42	30	28.5	800	1.13	118	15.0	1.24	127	37.1
LOW	1751	.31	23	17.6	600	.88	91	12.0	.92	94	26.6

DRAWING REVISION K	REVISION BY G.ZHAO	DATE 06-23-2015	TOLERANCES UNLESS OTHERWISE SPECIFIED: DEC. INCH ±0.1 [±2.5] .XX ±0.02 [±0.51] .XXX ±0.005 [±0.127] .XXXX ±0.0005 [±0.0127]	DRAWN BY V.GREEN	DATE 11-29-2000	REGAL™ Regal Beloit America, Inc.
ECO-0075858	APPROVED BY C.ZHANG	DATE 06-23-2015	ANGLE ±0.5°	APPROVED BY	DESCRIPTION MODEL-SFHP-3.3 OUTLINE	
SEE ECO			REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [0.076/.381] X 45° CORNER FILLETS: R.02 [51] MACHINED SURFACES: 125/3.2 INCH/mm	DATE	MATERIAL	PROCESS/FINISH BLACK
COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. (OWNER) AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.			THIRD ANGLE PROJECTION	SIZE C	DRAWING NUMBER 71902353	SHEET 1 OF 2

4

3

2

1

D

D

C



C

B

B

A

A

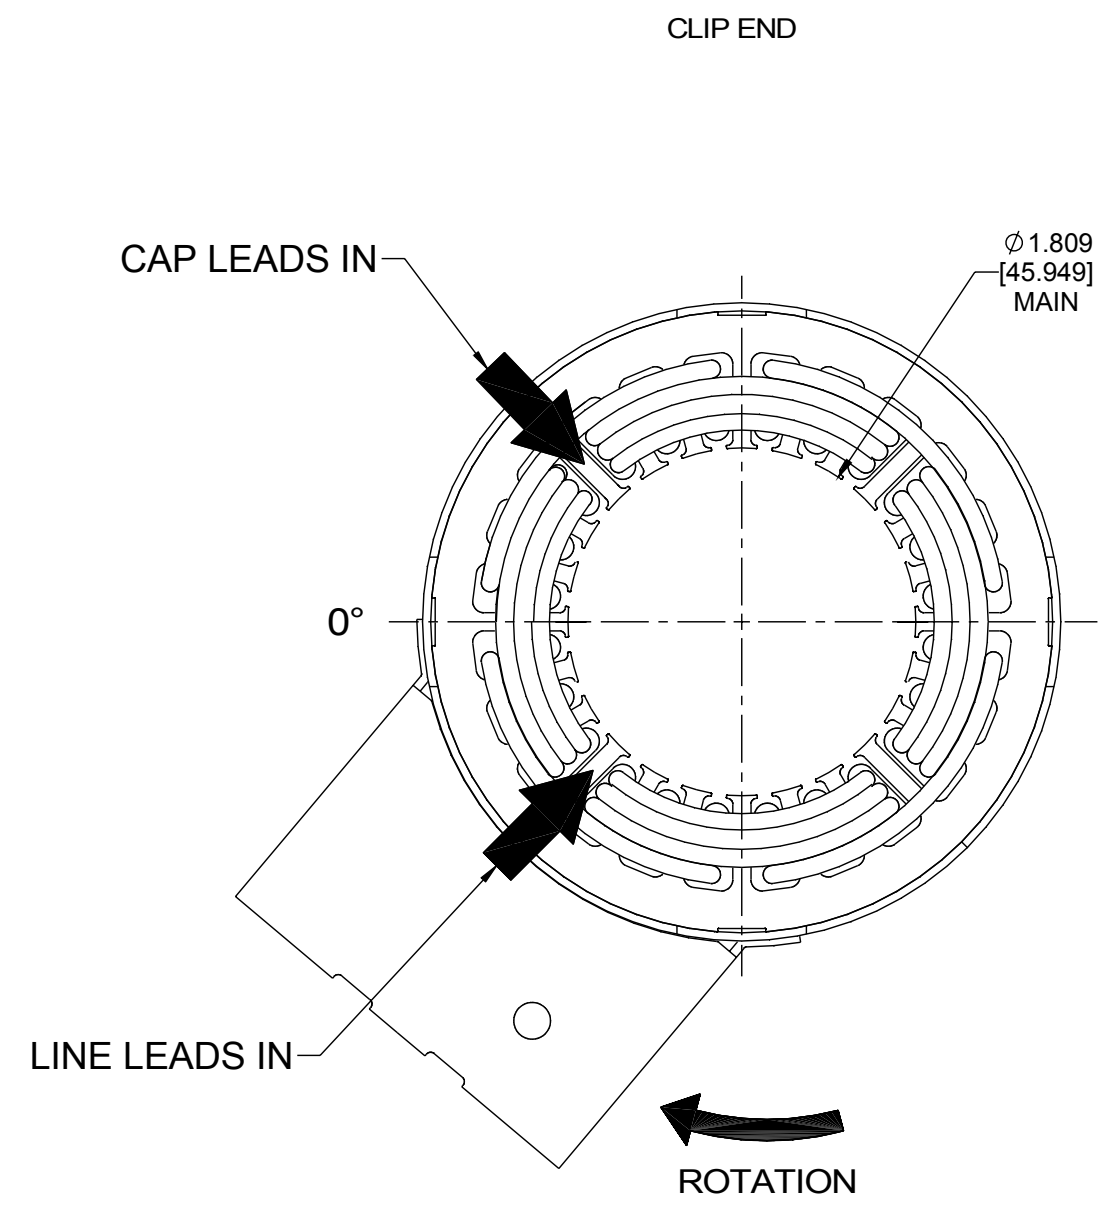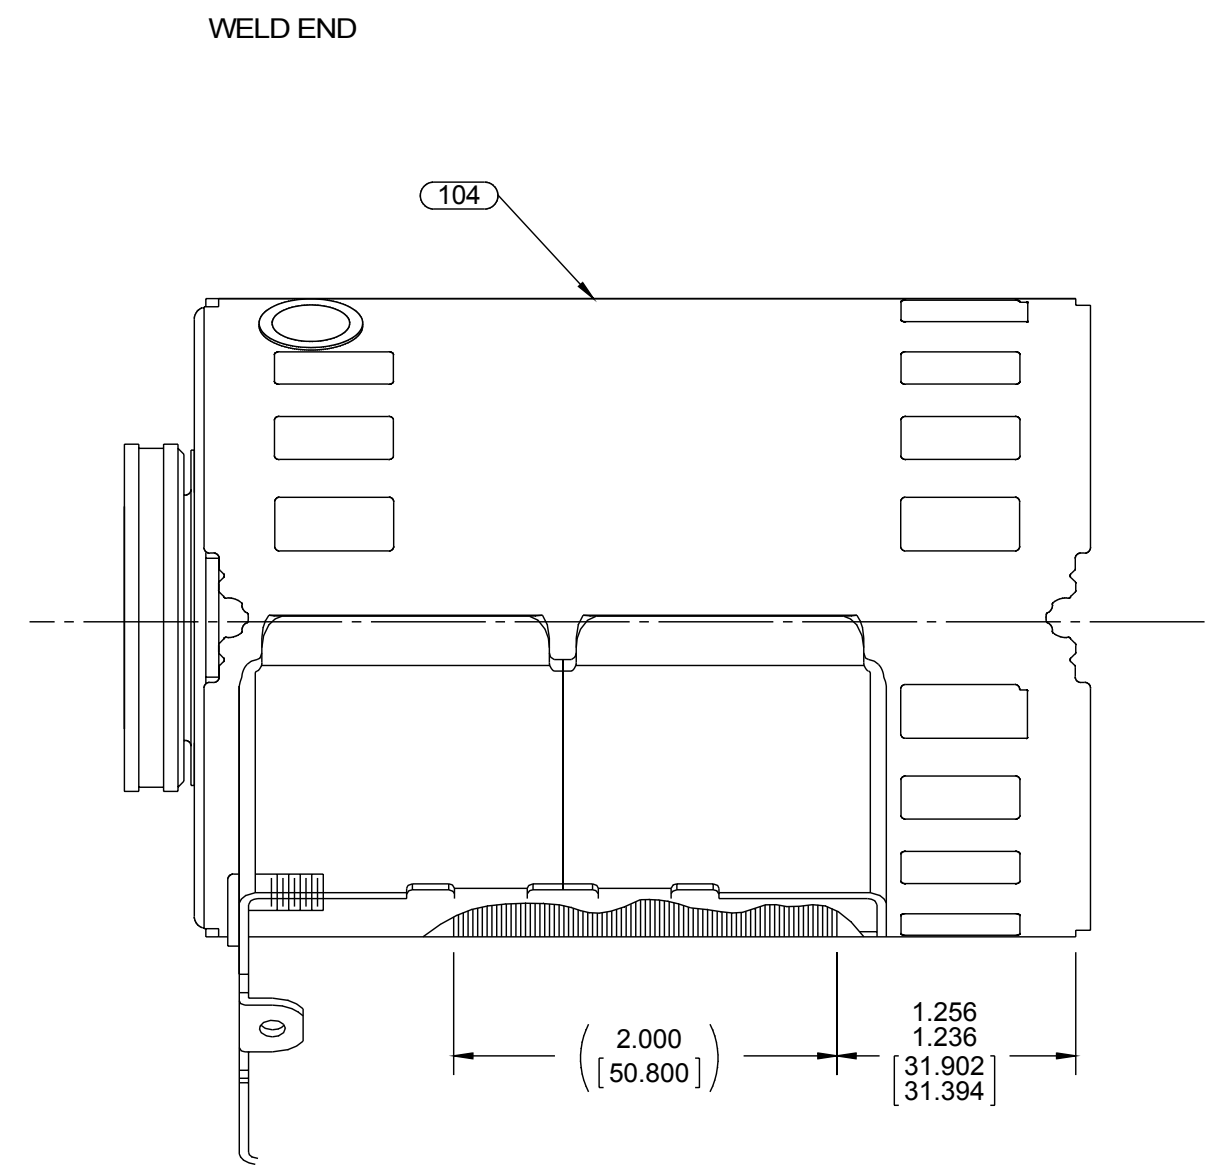

NOTES:

1. STAKE STATOR TO SLEEVE PER P.S. 8883 0264.
2. MAXIMUM TORQUE REQUIRED TO TURN MOTOR SHAFT IS 3/4 INCH-OUNCE.
3. MAKE UP WASHERS ARE TO BE ADDED OR DELETED TO ACHIEVE REQUIRED ENDPLAY.
4. CUT BROWN CAPACITOR LEADS TO LENGTH, RESTRIP TO .22 ± .03[5.59±76] AND ASSEMBLE TERMINALS.
5. ATTACHED TERMINALS MUST MEET SPECIFICATIONS ON PROCESS STANDARD.
6. OIL SLINGER MUST BE FLUSH WITH INSIDE OF EXTERNAL CAP.
7. ASSEMBLE NUTS TO BOLTS ON CLIP PLATE AND INSIDE CONDUIT BOX, FINGER TIGHT.
8. COIL LINE LEADS INSIDE CONDUIT BOX AFTER TESTING.

PACKING SPECIFICATIONS

1. PACK PER P.S. 8883 4200. 1 PER CARTON, 14 PER LAYER,
2. PLACE (1) 6 INCH FILLER TUBE OVER EACH SHAFT EXTENSION. PLACE MOTOR IN CARTON, CLOSE FLAPS AND TAPE.
3. PLACE (1) FLAT PAD ON PALLET, (1) BETWEEN EACH LAYER AND
4. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 8883 4408.

DRAWING REVISION K	REVISION BY G.ZHAO	DATE 06-23-2015	TOLERANCES UNLESS OTHERWISE SPECIFIED: DEC. INCH mm ANGLE .X ±0.1 [±2.5] ±0.5° .XX ±0.02 [±0.51] .XXX ±0.005 [±0.127] .XXXX ±0.0005 [±0.0127]	DRAWN BY V.GREEN	Regal Beloit America, Inc.
ECO ECO-0075858	APPROVED BY C.ZHANG	DATE 06-23-2015	REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [076/381] X 45° CORNER FILLETS: R.02 [51] MACHINED SURFACES: 125/ mm 3.2/ INCH mm 3.2/ mm SHOWN IN [BRACKETS]	DATE 11-29-2000	
ECO DESCRIPTION SEE ECO				APPROVED BY	MATERIAL
<small>COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.</small>				DATE	PROCESS/FINISH BLACK
				REFERENCE	DRAWING NUMBER 71902353
				THIRD ANGLE PROJECTION	SHEET 2 OF 2

4

3

2

1