
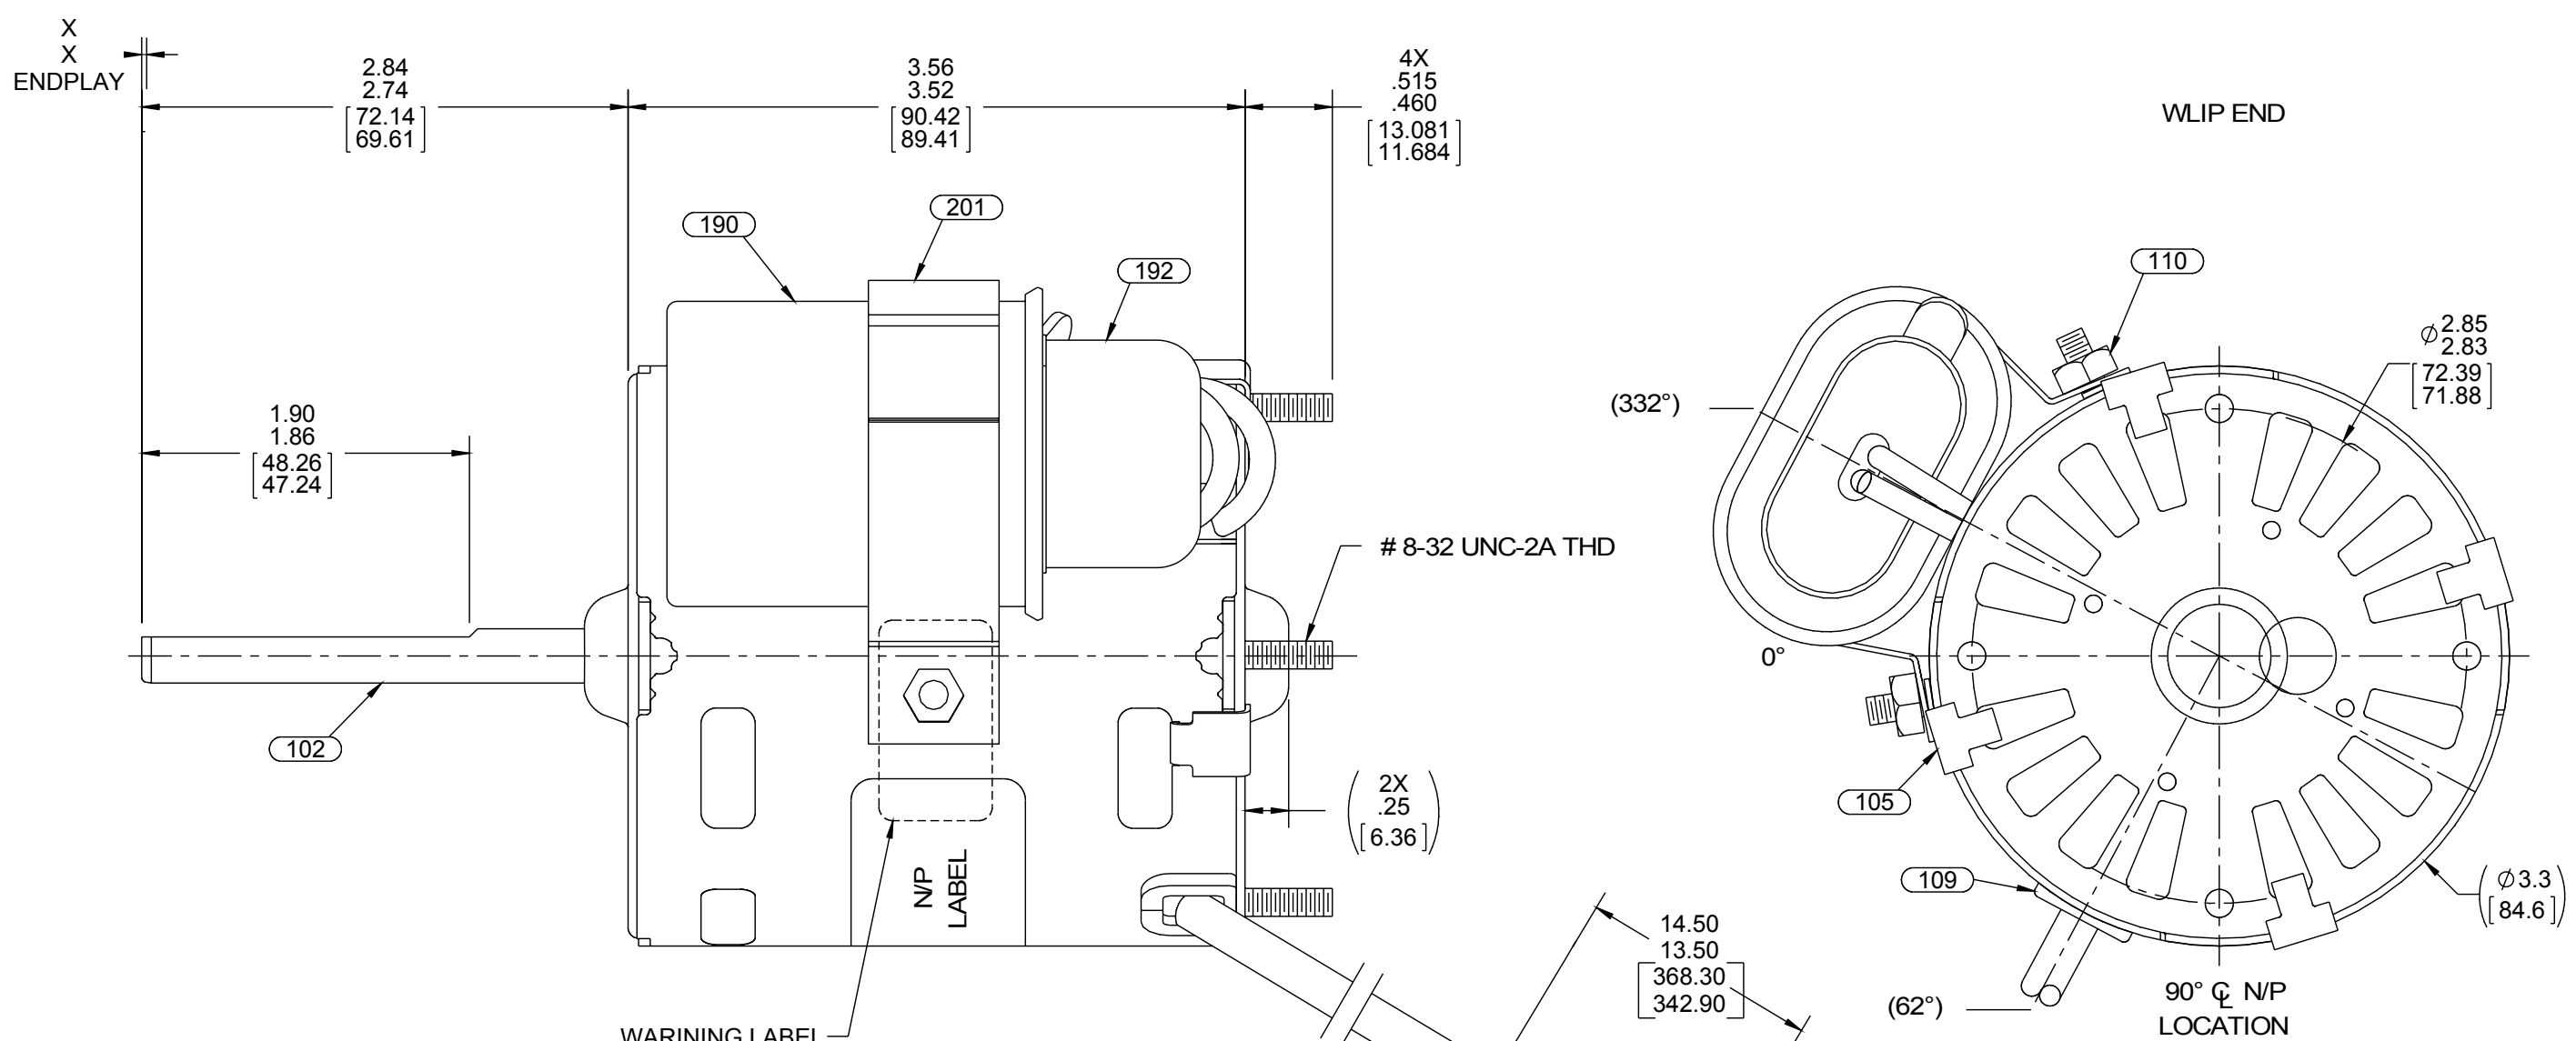


4

3

2

1

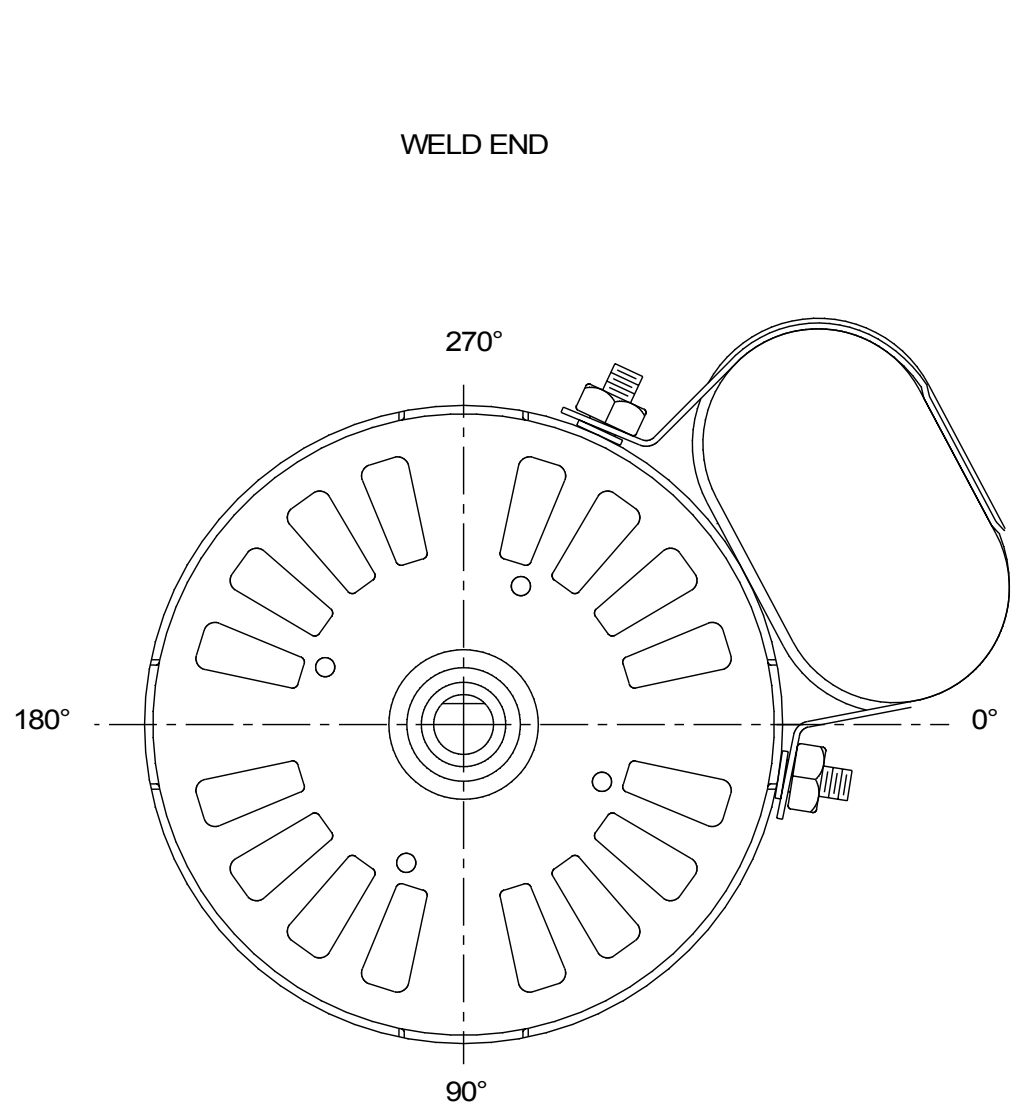

1 LEAD MATERIAL
 18 GA. 105°C 2/64 INS.
 SJT 3 CONDUCTOR
 BLACK, WHITE, GRN/YEL,
 32.00/30.00[812.80/762.00] LONG
 WHITE, AND BLACK,
 W/ FFLAG TERMS. 8903 9162
 AMP #2-520128-2
 GRN/YEL W/ RING TERM. 8902 0157
 AMP #350436-2

1 CAPACITOR LEADS
 18 GA. 125°C 2/64 INS.
 X-LINKED POLY, (2) BROWN,
 6.00/4.00[152.40/101.60] LONG
 W/F FLAG TERM. 8903 4045
 AMP #42742-2

NOTES:
 1. LEAD MATERIAL MUST BE FT1, FT2, AND VW-1 RATED.
 2. NO PACKAGING TAPE OVER CARTON LABEL.

6130 5568

SAFETY WARNING
 This motor must be grounded in accordance with local or national electrical codes to prevent possible injury due to electrical shock

AVERTISSEMENT DE SÉCURITÉ
 Ce moteur doit être fondée sur conformément à la réglementation locale ou national électrique codes pour prévenir d'éventuelles blessures en raison de choc électrique

0046 4072 0046 9071

FASCO Fasco Industries, Inc. Motor Division

Assembled in Mexico

No. 71903304 TYPE U90B1
 115 V 60 Hz Class B
 0.9 A 1550 RPM
 Model D1143
 Max Amb. 40°C E46205
 Thermally Protected

Connection Diagram

Wht ——— Line
 Blk ——— Line
 Brn ———
 Grn/Yel ——— Grd

AO LR6319
 1/20 HP
 Sealed Ball Brg
 E40513
 E53469
 5 MFD/370 VAC

6129 9553

APPLY IN A CONVENIENT LOCATION TO READ FROM CLIP END

CUSTOMER PN:	D1143	ENVIRONMENT:	DRY
CUSTOMER:	FASCO DIST.	APPLICATION:	-
		MOTOR WEIGHT:	3.25 LBS.

SIGNED:	DATE:	CUSTOMER APPROVAL	FRONT SHAFT POSITION	MOTOR TYPE							REFERENCE SAMPLE NUMBER				
				B	LA	FR	A	S	C	E	B	A			
			UP DOWN	00	90	30	V	05	CP	5	0	0	71903304		
TYPICAL PERFORMANCE AT 115 VOLTS 60 HZ															
MOTOR SPEED	IDLE		FULL LOAD				LOCKED			BREAK					
	RPM	AMP	WATT	IN OZ	RPM	AMP	WATT	IN OZ	AMP	WATT	IN OZ				
	1784	.38	30	37.6	1550	.69	74	15.5	1.32	140	43.3				

DRAWING REVISION A	REVISION BY G.ZHAO	DATE 09-18-2015	TOLERANCES UNLESS OTHERWISE SPECIFIED: DEC. INCH mm ANGLE .X ±0.1 [±2.5] .XX ±0.01 [±0.25] .XXX ±0.005 [±0.127] .XXXX ±0.0005 [±0.0127]	DRAWN BY S.DALTON	REGAL™ Regal Beloit America, Inc.
ECO-0075861	APPROVED BY C.ZHANG	DATE 09-18-2015	REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [0.076/.381] X 45° CORNER FILLETS: R.02 [51] MACHINED SURFACES: 125/3.2 INCH/mm	DATE 10-10-2011	DESCRIPTION MODEL-SFHP-3.3 OUTLINE
SEE ECO				APPROVED BY	MATERIAL
COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. (OWNER) AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.				DATE	PROCESS/FINISH BLACK
				REFERENCE	SIZE C
				THIRD ANGLE PROJECTION	DRAWING NUMBER 71903304
					SHEET 1 OF 2

4

3

2

1

D

D

C



C

B

B

A

A

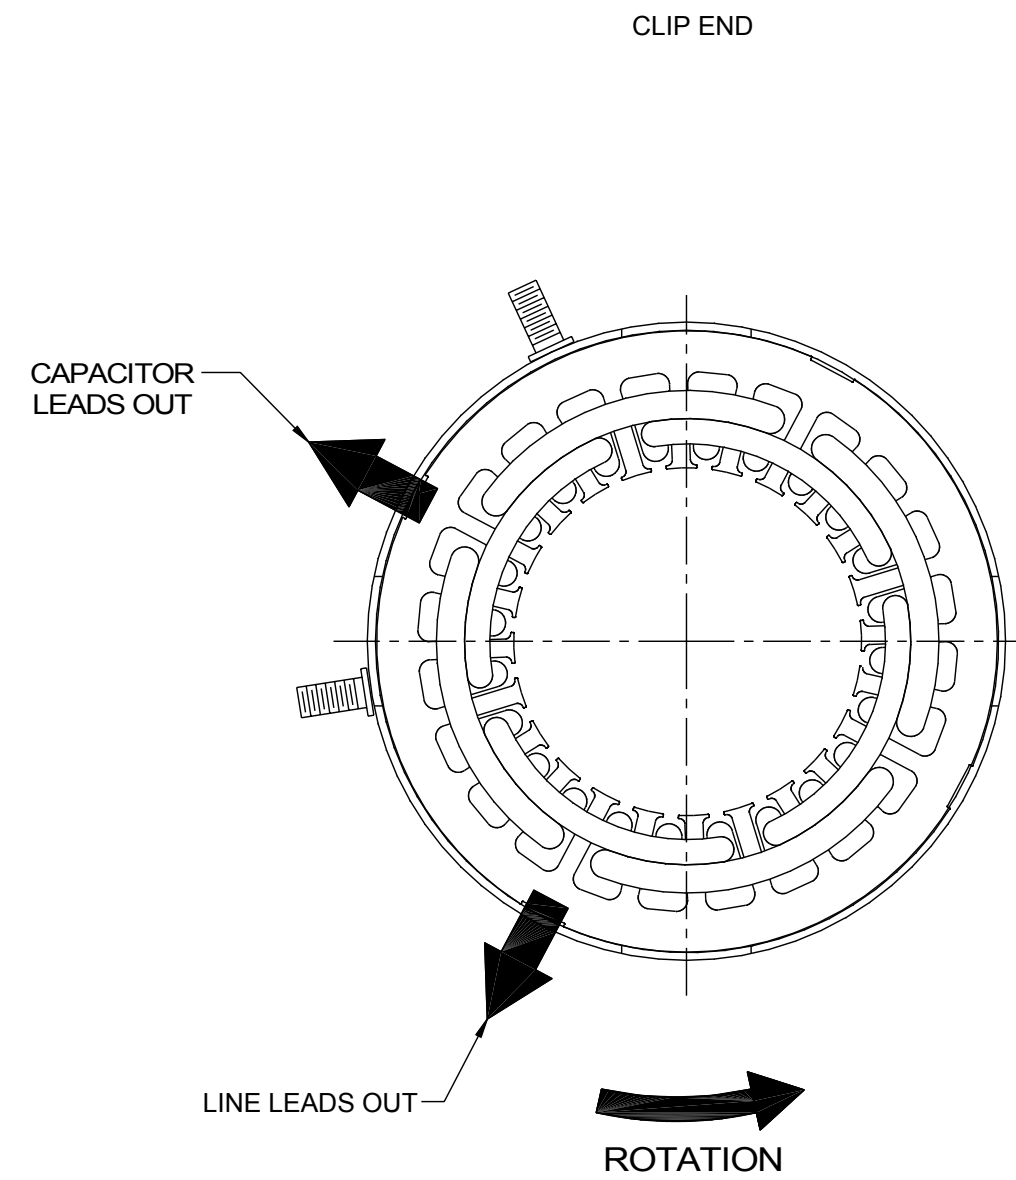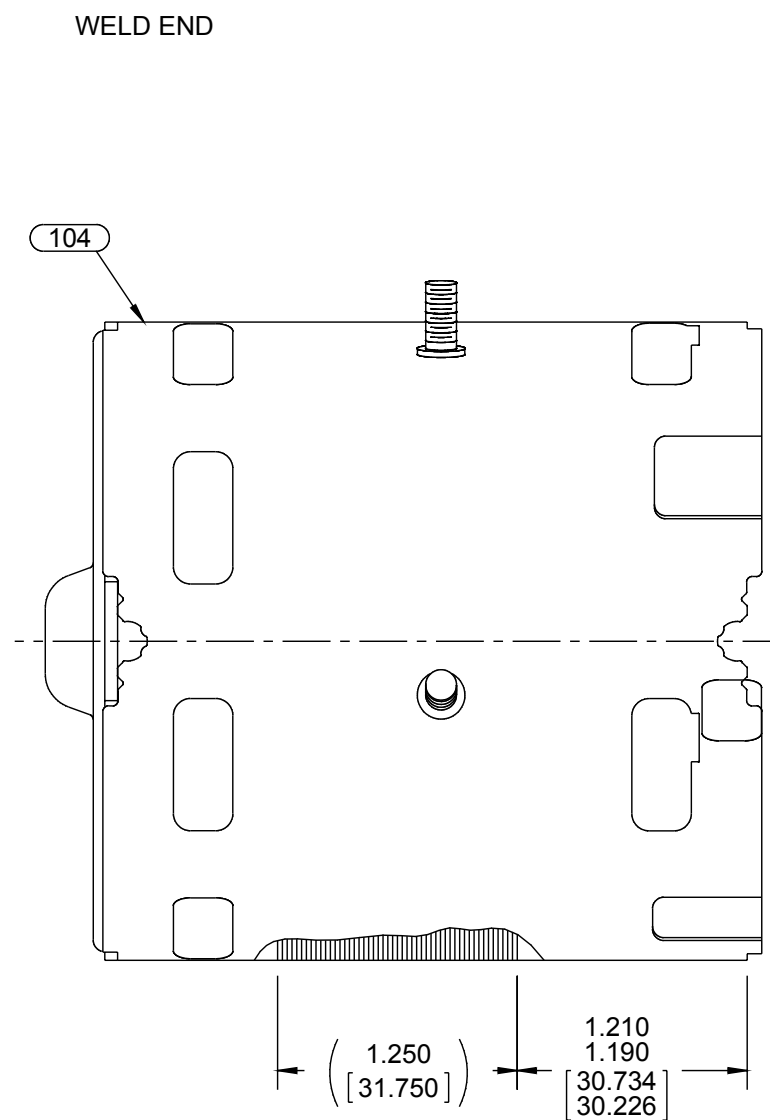

NOTES:

1. STAKE STATOR TO SLEEVE PER P.S. 8883 0264.
2. MAXIMUM TORQUE REQUIRED TO TURN MOTOR SHAFT IS 3/8 INCH-OUNCE.
3. ASSEMBLE SPRING BETWEEN WASHER AND BEARING ON CLIP END, WITH SPRING FINGERS TOWARDS BEARING.
4. ASSEMBLE BALL BEARINGS TO BEARING RETAINERS PER WORK CENTER PROCESS.
5. BRING LINE LEADS DIRECTLY OUT LEAD EXIT. IGNORE POSITION OF OTHER LEADS, THEY WILL ROTATE BACK TO THEIR LEAD EXIT.
6. WHEN PRESSING ON SLEEVE, ROTATE SLEEVE C.C.W. SO THAT THE EDGE OF JACKET IS INSIDE SLEEVE.

PACKING SPECIFICATIONS

1. PACK PER P.S. 8883 4200. 1 PER CONTAINER, 175 MAX. PER PALLET, 25 PER LAYER, 7 LAYERS PER PALLET.
2. PLACE CARTON LABEL ON SHAFT END OF CARTON. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE P.S. 8883 4408.
3. PLACE FOAM RING ON CLIP END OF MOTOR. PLACE FILLER TUBE OVER SHAFT EXTENSION AND PLACE IN CARTON. STUFF PAPER AROUND MOTOR TO PREVENT MOVEMENT DURING SHIPPING.
4. PLACE (1) FLAT PAD ON PALLET, (1) BETWEEN EACH LAYER AND (1) ON TOP.

DRAWING REVISION A	REVISION BY G.ZHAO	DATE 09-18-2015	TOLERANCES UNLESS OTHERWISE SPECIFIED: DEC. INCH mm ANGLE .X ±0.1 [±2.5] .XX ±0.01 [±0.25] .XXX ±0.005 [±0.127] .XXXX ±0.0005 [±0.0127]	DRAWN BY S.DALTON	Regal Beloit America, Inc.	
ECO ECO-0075861	APPROVED BY C.ZHANG	DATE 09-18-2015	DATE 10-10-2011	APPROVED BY		
ECO DESCRIPTION SEE ECO			REMOVE BURRS & BREAK SHARP EDGES: 003/015 [076/381] X 45° CORNER FILLETS: R.02 [51] MACHINED SURFACES: 125/3.2 INCH/mm	DATE	DESCRIPTION MODEL-SFHP-3.3 OUTLINE	
<small>COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.</small>			REFERENCE	MATERIAL	PROCESS/FINISH BLACK	
			THIRD ANGLE PROJECTION	SIZE C	DRAWING NUMBER 71903304	SHEET 2 OF 2

4

3

2

1