


31	REVISED PROCESS STANDARD NUMBERS ON ROTOR/SHAFT DRAWING	SD 2-2-05	32	REVISED LABEL LAYOUT, REVISED NOTES, ADDED PC MARKERS	VLL 09-26-07	33	REACTIVATE	4005520 MLM 05/17/12	STANDARD TOLERANCES: ANGULAR +/- 1 DEGREE 2 PLACE DECIMAL +/- .01 3 PLACE DECIMAL +/- .005
----	---	-----------	----	---	--------------	----	------------	-------------------------	---

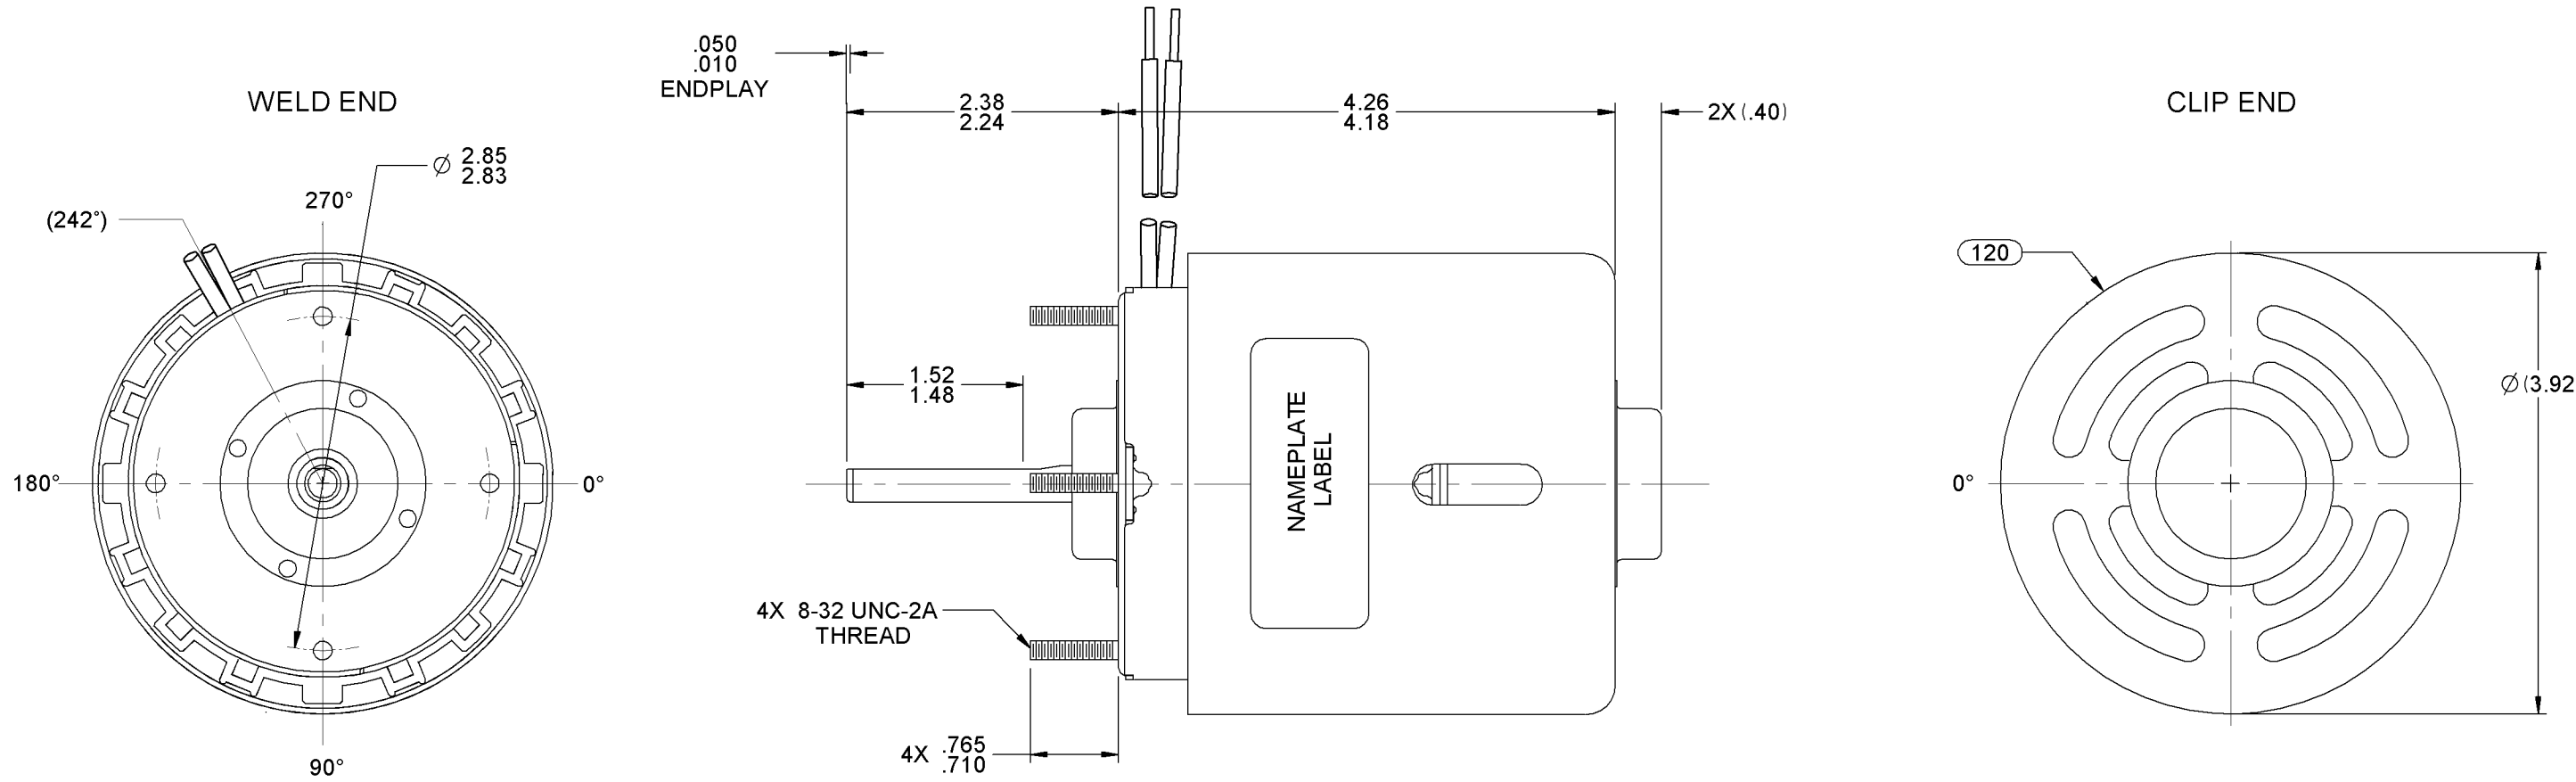

LEAD MATERIAL  
18 GA. 125°C, 2/64 INSUL.  
X-LINKED POLY, (2) BLK  
14.00/12.00 IN. LONG  
.56/.44 IN. STRIP

0046-4072

0046-4282

**FASCO** Fasco Industries, Inc.  
Motor Division

Assembled in Mexico

No. 71631637	TYPE U63B1	T.P. TEAO	LR6319
230 V	60 Hz	Class B	1 Spd
.89 A	1500 RPM		1/25 HP
Model D192			Max. Amb: 40°C

**SAFETY WARNING**

This Motor Must Be Grounded in Accordance With Local Or National Electrical Codes To Prevent Possible Injury Due To Electrical Shock

- NOTES:
1. PACK 210 MAX. MOTORS PER PALLET.
  2. NO PACKAGING TAPE OVER CARTON LABEL.

FRONT SHAFT POSITION	* TYPICAL PERFORMANCE AT 230 VOLTS 60 Hz.												CUSTOMER: FASCO DIST.	<b>FASCO</b> FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION									
	HORIZONTAL  DOWN	MOTOR SPEED	IDLE			LOADED			LOCKED			BREAK	PART NUMBER: D192		CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.								
R.P.M.			AMP.	WATT	IN.OZ.	R.P.M.	AMP.	WATT	IN.OZ.	AMP.	WATT	IN.OZ.	APPLICATION: COUNTER SALES										
CUSTOMER APPROVAL:													MOTOR WEIGHT: 4.16 LBS.	MOTOR TYPE	DRAWING NUMBER								
SIGNED:													ENVIRONMENT: DRY	SHADED POLE	7163 1637								
DATE:													FINISH COLOR: BLACK	B	LA	FR	A	S	C	E	B	A	REV.
													DRAWN BY: S. M. MAGGARD	00	63	28	T	05	GY	5	3	0	33
													DATE DRAWN: 6-25-2003										

If Printed, this is an Uncontrolled Document.