
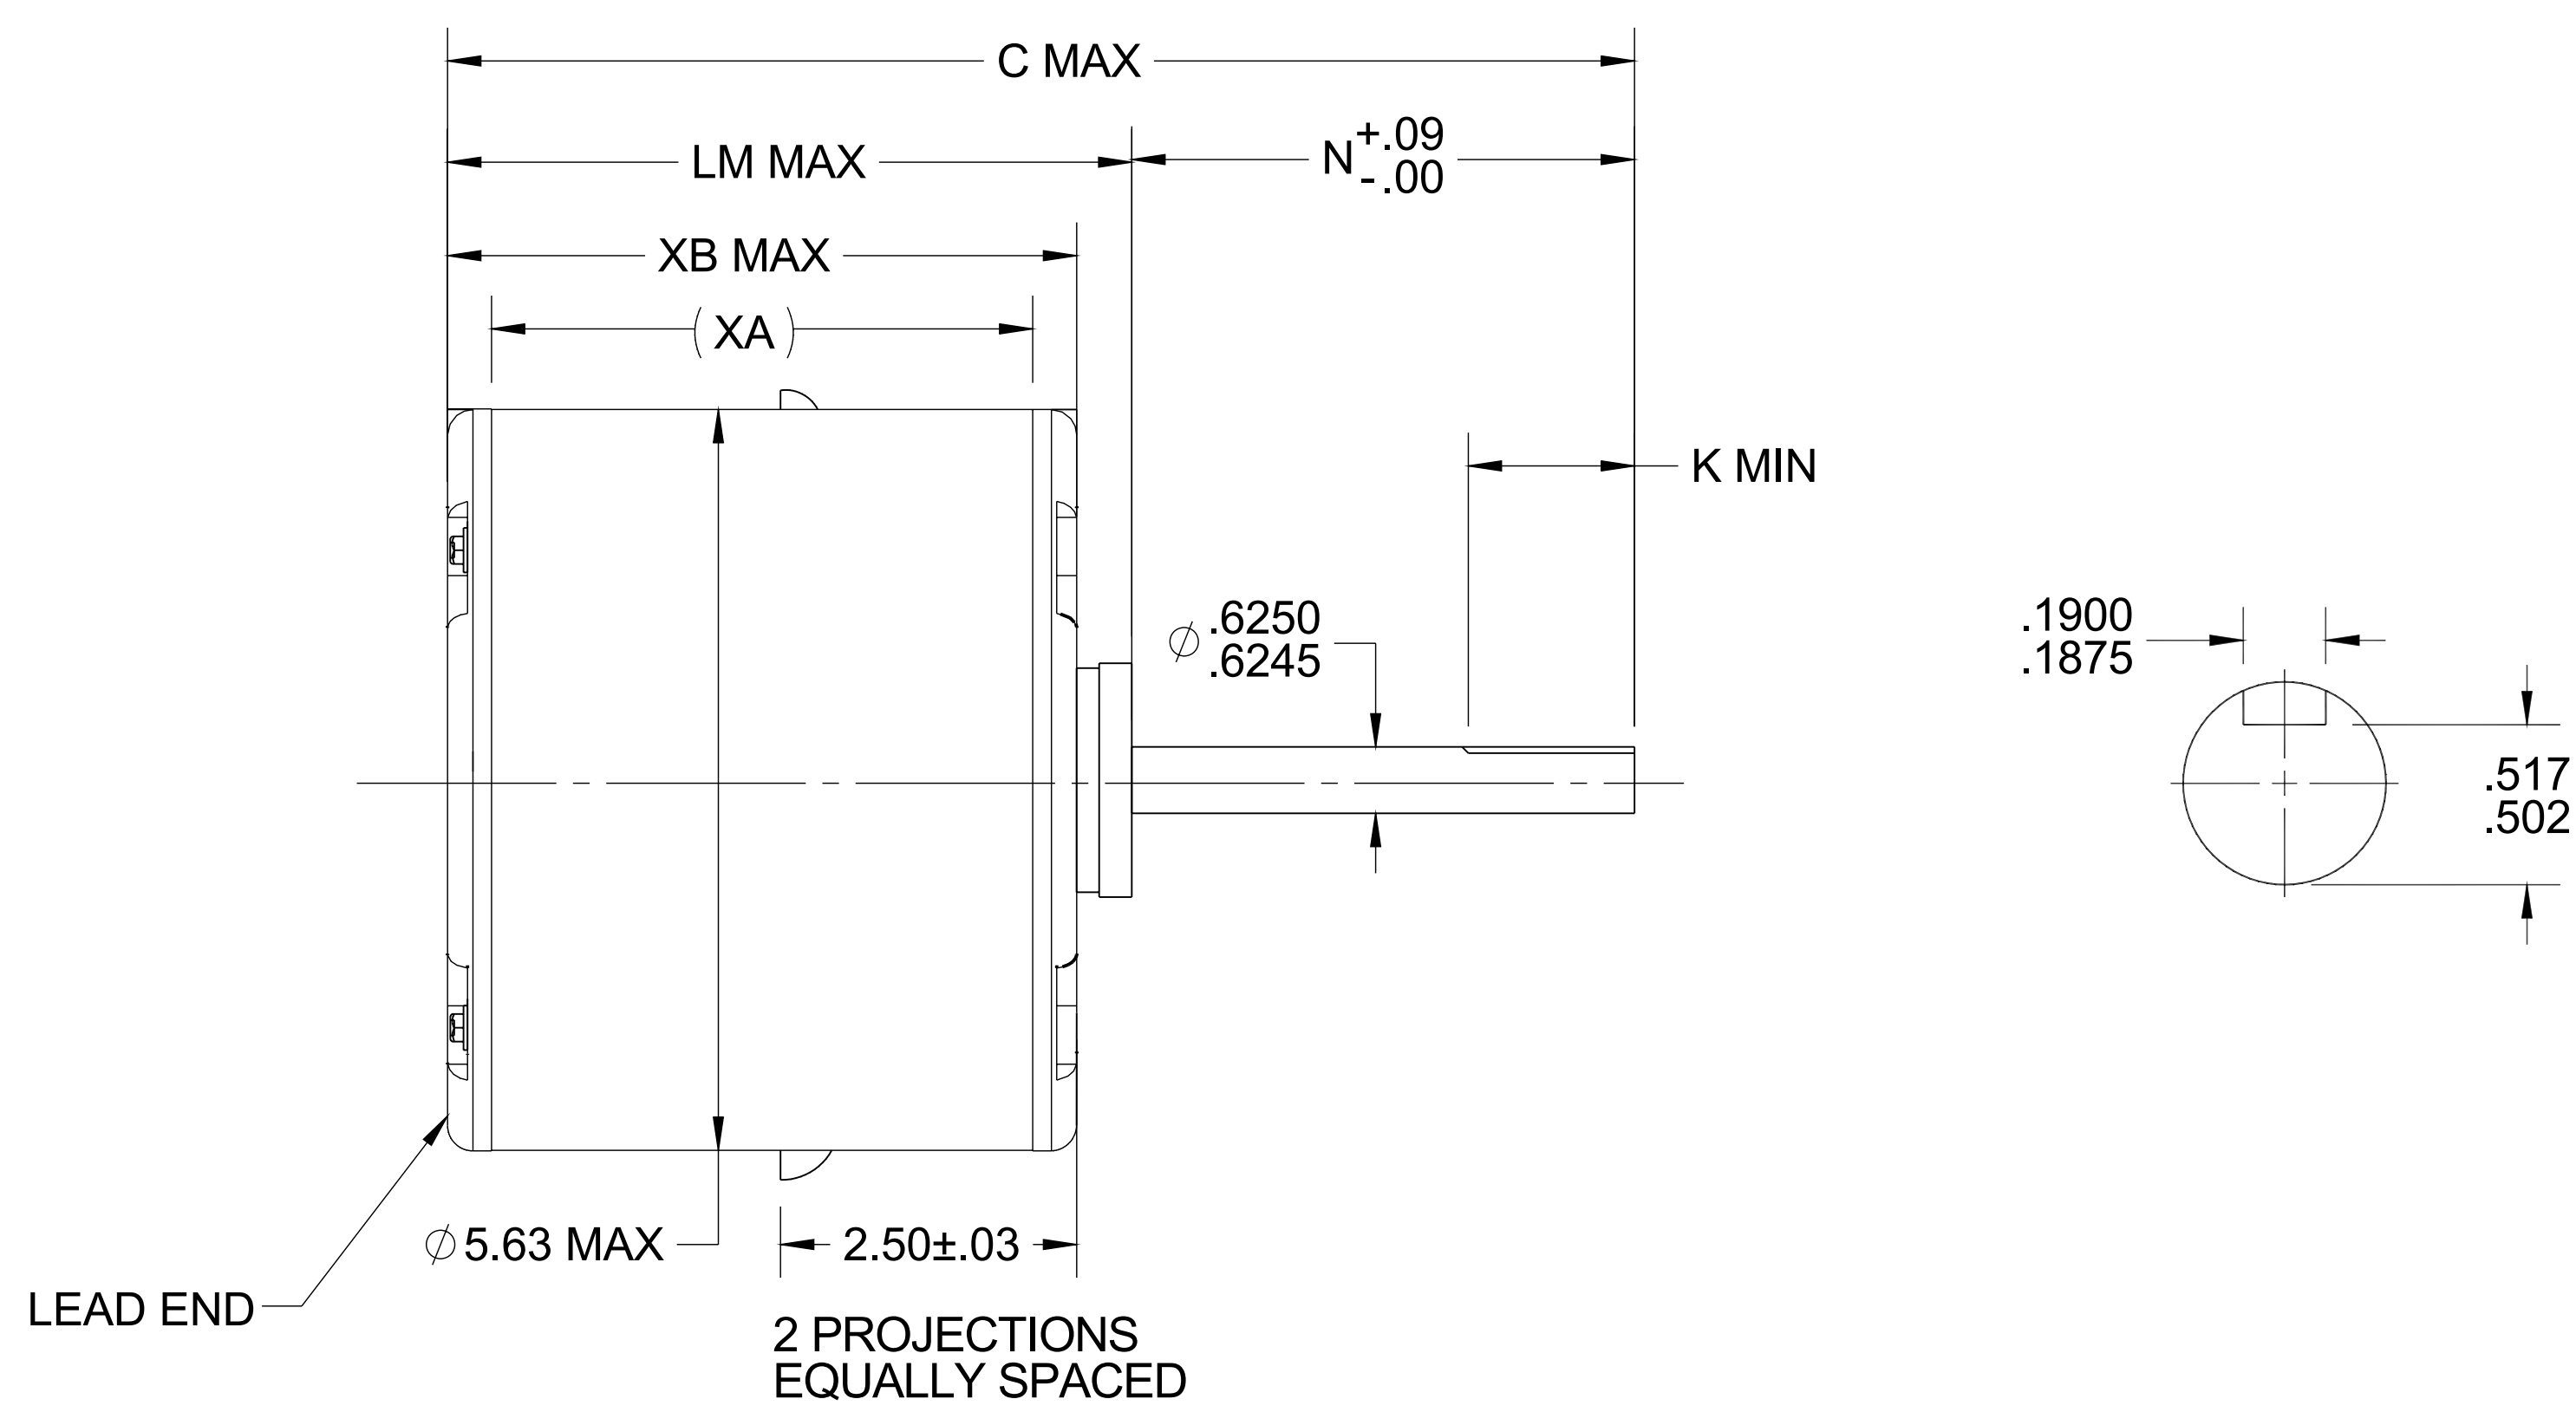


S.NO	CONNECTION	COLOR	EXIT TYPE	EXIT LOC (VIEWING LE)	GAGE	MATERIAL	WALL THK.	LENGTH	TERMINATION
1	COMMON LEAD	PURPLE	E/S LEAD HOLE	3:20	18	VULKENE	2/64	97.00	.25 SQC
2	CAPACITOR LEAD	BROWN	E/S LEAD HOLE	3:20	18	VULKENE	2/64	97.00	.25 SQC
3	DUAL VOLTAGE LEAD	BLUE	E/S LEAD HOLE	3:20	18	VULKENE	2/64	97.00	.25 SQC
4	DUAL VOLTAGE LEAD	BLACK	E/S LEAD HOLE	3:20	18	VULKENE	2/64	97.00	.25 SQC
5	DUAL VOLTAGE LEAD	RED	E/S LEAD HOLE	3:20	18	VULKENE	2/64	97.00	.25 SQC
6	DUAL VOLTAGE LEAD	ORANGE	E/S LEAD HOLE	3:20	18	VULKENE	2/64	97.00	.25 SQC

NAMEPLATE DATA	
MODEL	5KCP39UFWD73S
CUST. P/N	D2851
HP	1-3/4
RPM	1125/950
VOLTS	208-230/460
HZ	60/50
SPEEDS	1
AMPS	3.95/2.10
CAP. REQ'D-D1	25.0 µfd/370 Volts
CAP. REQ'D-D2	N/R
CONN.DRW#	NP24X350275
ROTATION	CCW (VIEWED FROM LE)

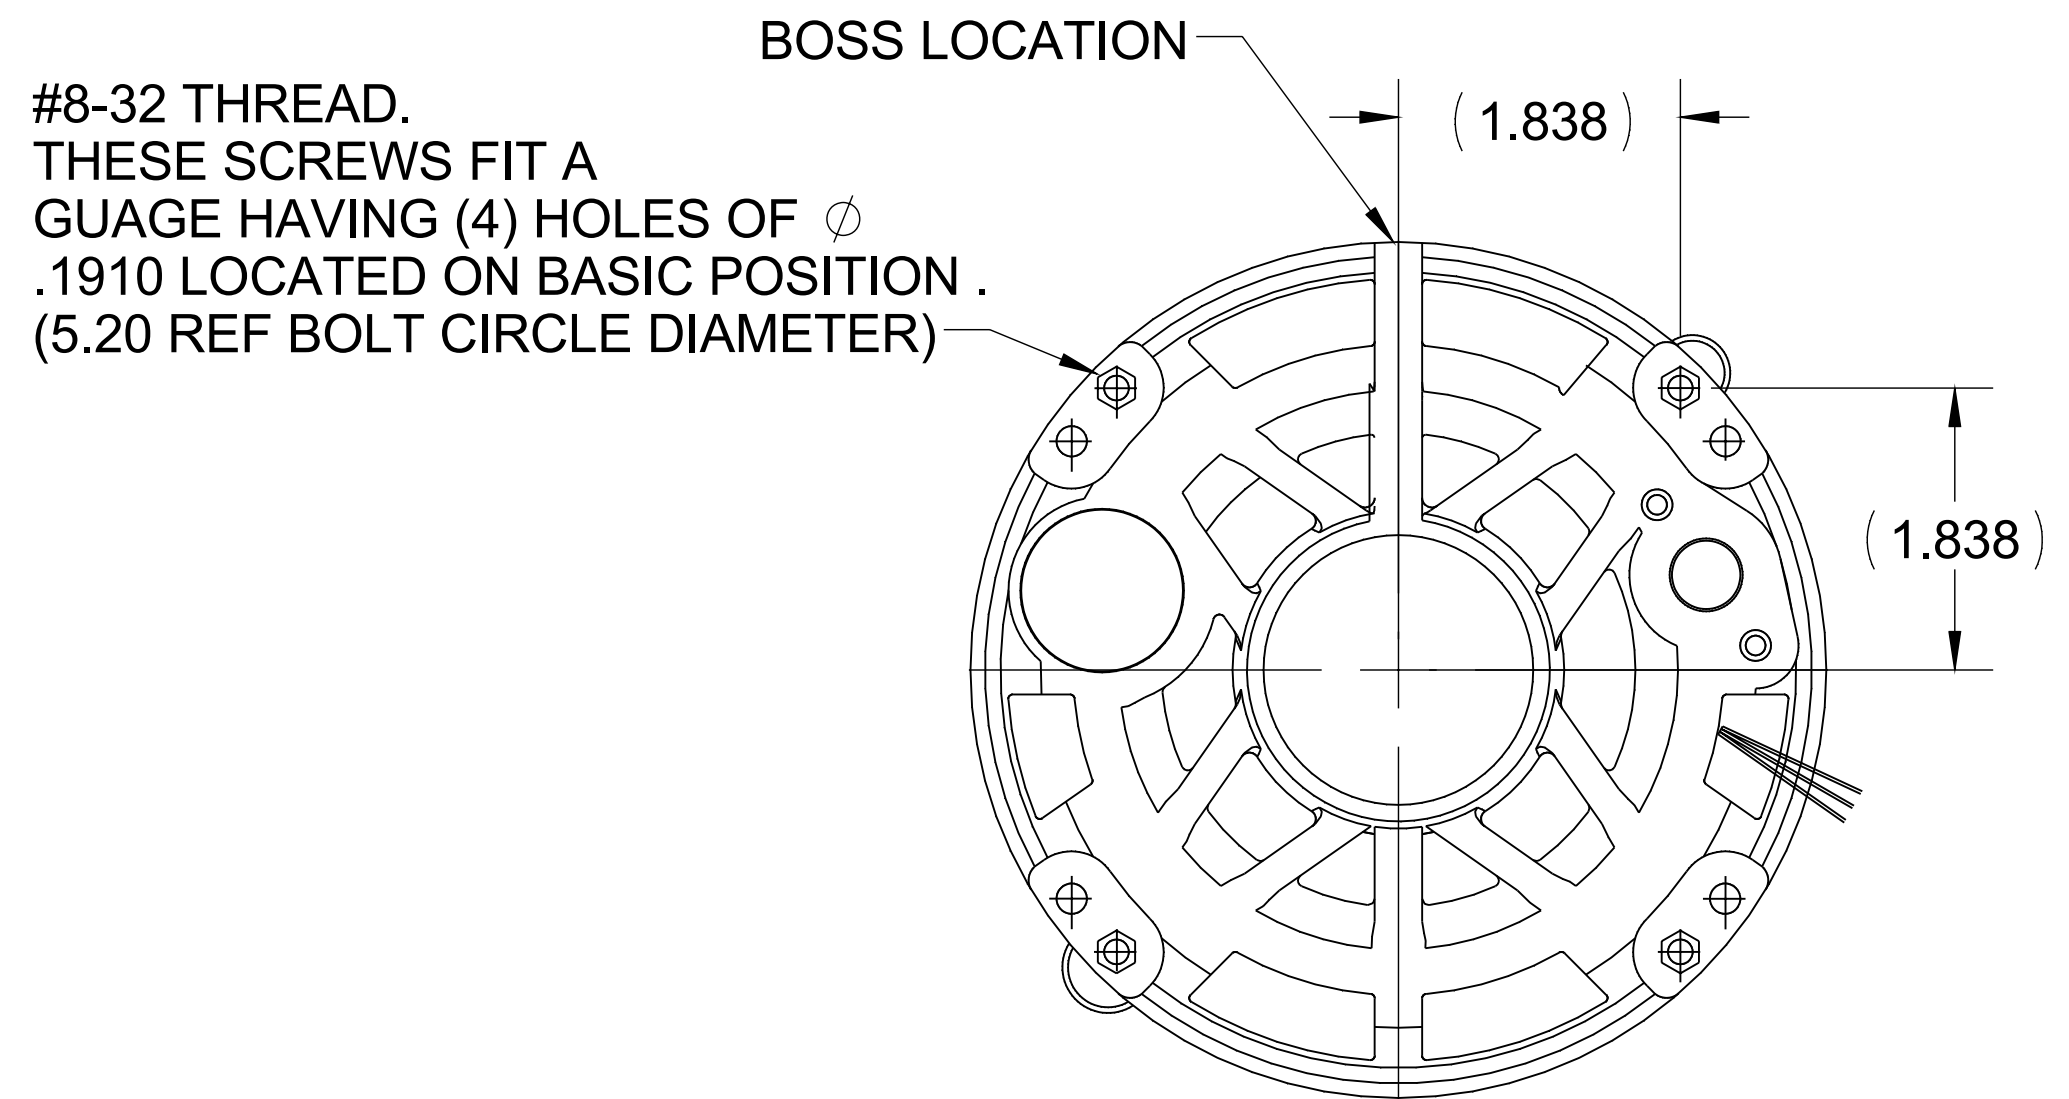

- NOTE:
- 1) DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
 - 2) NAME PLATE LABEL LOCATION : 90° -NEAR OPP LEAD END - READ FROM LE.

	.14	-
	XC	XD
10.46	3.25	1.34
C	N	K
	7.31	6.07
	LM	XA
		6.73
		XB

DRAWING REVISION F		REVISION BY SN	DATE 08/27/2015	TOLERANCES UNLESS OTHERWISE SPECIFIED: DEC. INCH mm ANGLE .X ±0.1 [±2.5] ±7' 30" .XX ±0.03 [±0.76] .XXX ±0.005 [±0.127] .XXXX ±0.0005 [±0.0127] REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [.076/.381] CORNER FILLETS: .02 [.51] MACHINED SURFACES: 200 INCH mm 5.1 mm SHOWN IN [BRACKETS]	DRAWN BY MVG	Regal Beloit America, Inc.
ECO ECO-0084148		APPROVED BY KEP	DATE 08/27/2015		DATE 07/17/2014	
ECO DESCRIPTION UPDATED AS PER ECO-0084148					APPROVED BY MVN	OUTLINE (CUSTOMER NAME : FASCO IND)
VENTILATION SYSTEM				DATE 07/17/2014	MATERIAL	
SHELL VENTS	CLOSED			REFERENCE	PROCESS/FINISH	
ENDSHIELD (OPP.LEAD END)	OPEN			THIRD ANGLE PROJECTION	SIZE B	
ENDSHIELD (LEAD END)	OPEN				DRAWING NUMBER 5KCP39UFWD73S	
					SHEET 1 OF 1	

B

B

A

A

4

3

2

1

4

3

2

1