



**MOTOR SPECIFICATION**

**8856KTS-A11U**

Q.R. No.	Y005160	CUSTOMER NO.	D5459
CUSTOMER	FASCO USA		
MOTOR RATING	VOLTS	208-230	Hz 60 Ph 1 Duty S1 AOM
	RPM.	1075	0.94 $\Delta$ AMPS
	NOM. OUTPUT	1/6-1/8 HP	
ROTATION	REVERSIBLE		
CAPACITOR	START	-----	$\mu$ F/V RUN 5/--- $\mu$ F/V
ENCLOSURE	T.E.A.O.		
MOTOR TYPE	PSC	INSULATION CLASS	130 (B)
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN CONDENSING - SHAFT HORIZONTAL		
BEARING D.E.	SLEEVE	LUBRICATION	PERMAWICK OPERA.TEMP -15°~90° C
BEARING N.D.E.	SLEEVE		
SUPPLY LEAD	AS SHOWN		
EARTH PROVISION	SUPPLIED		
BASIC BUILD SPECIFICATION	305-881-08	PAINT/ COLOUR	PC GREY PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP88008-01		
CONNECTION DIAGRAM	AS SHOWN	RATING LABEL	AS SHOWN

**FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)**

THIRD ANGLE PROJECTION.

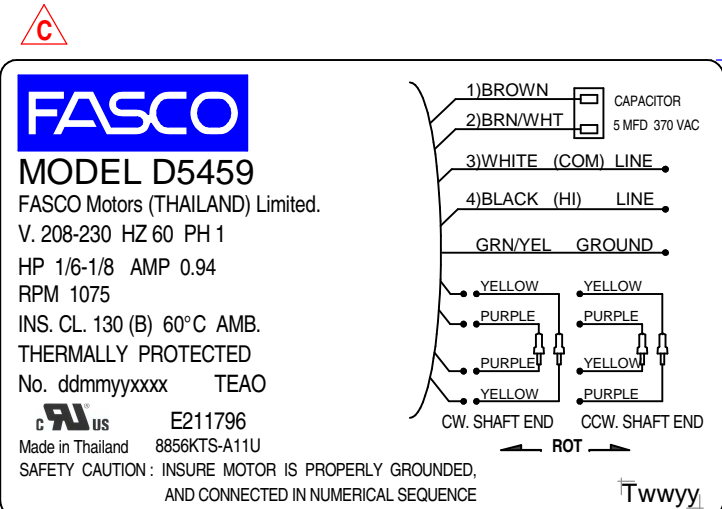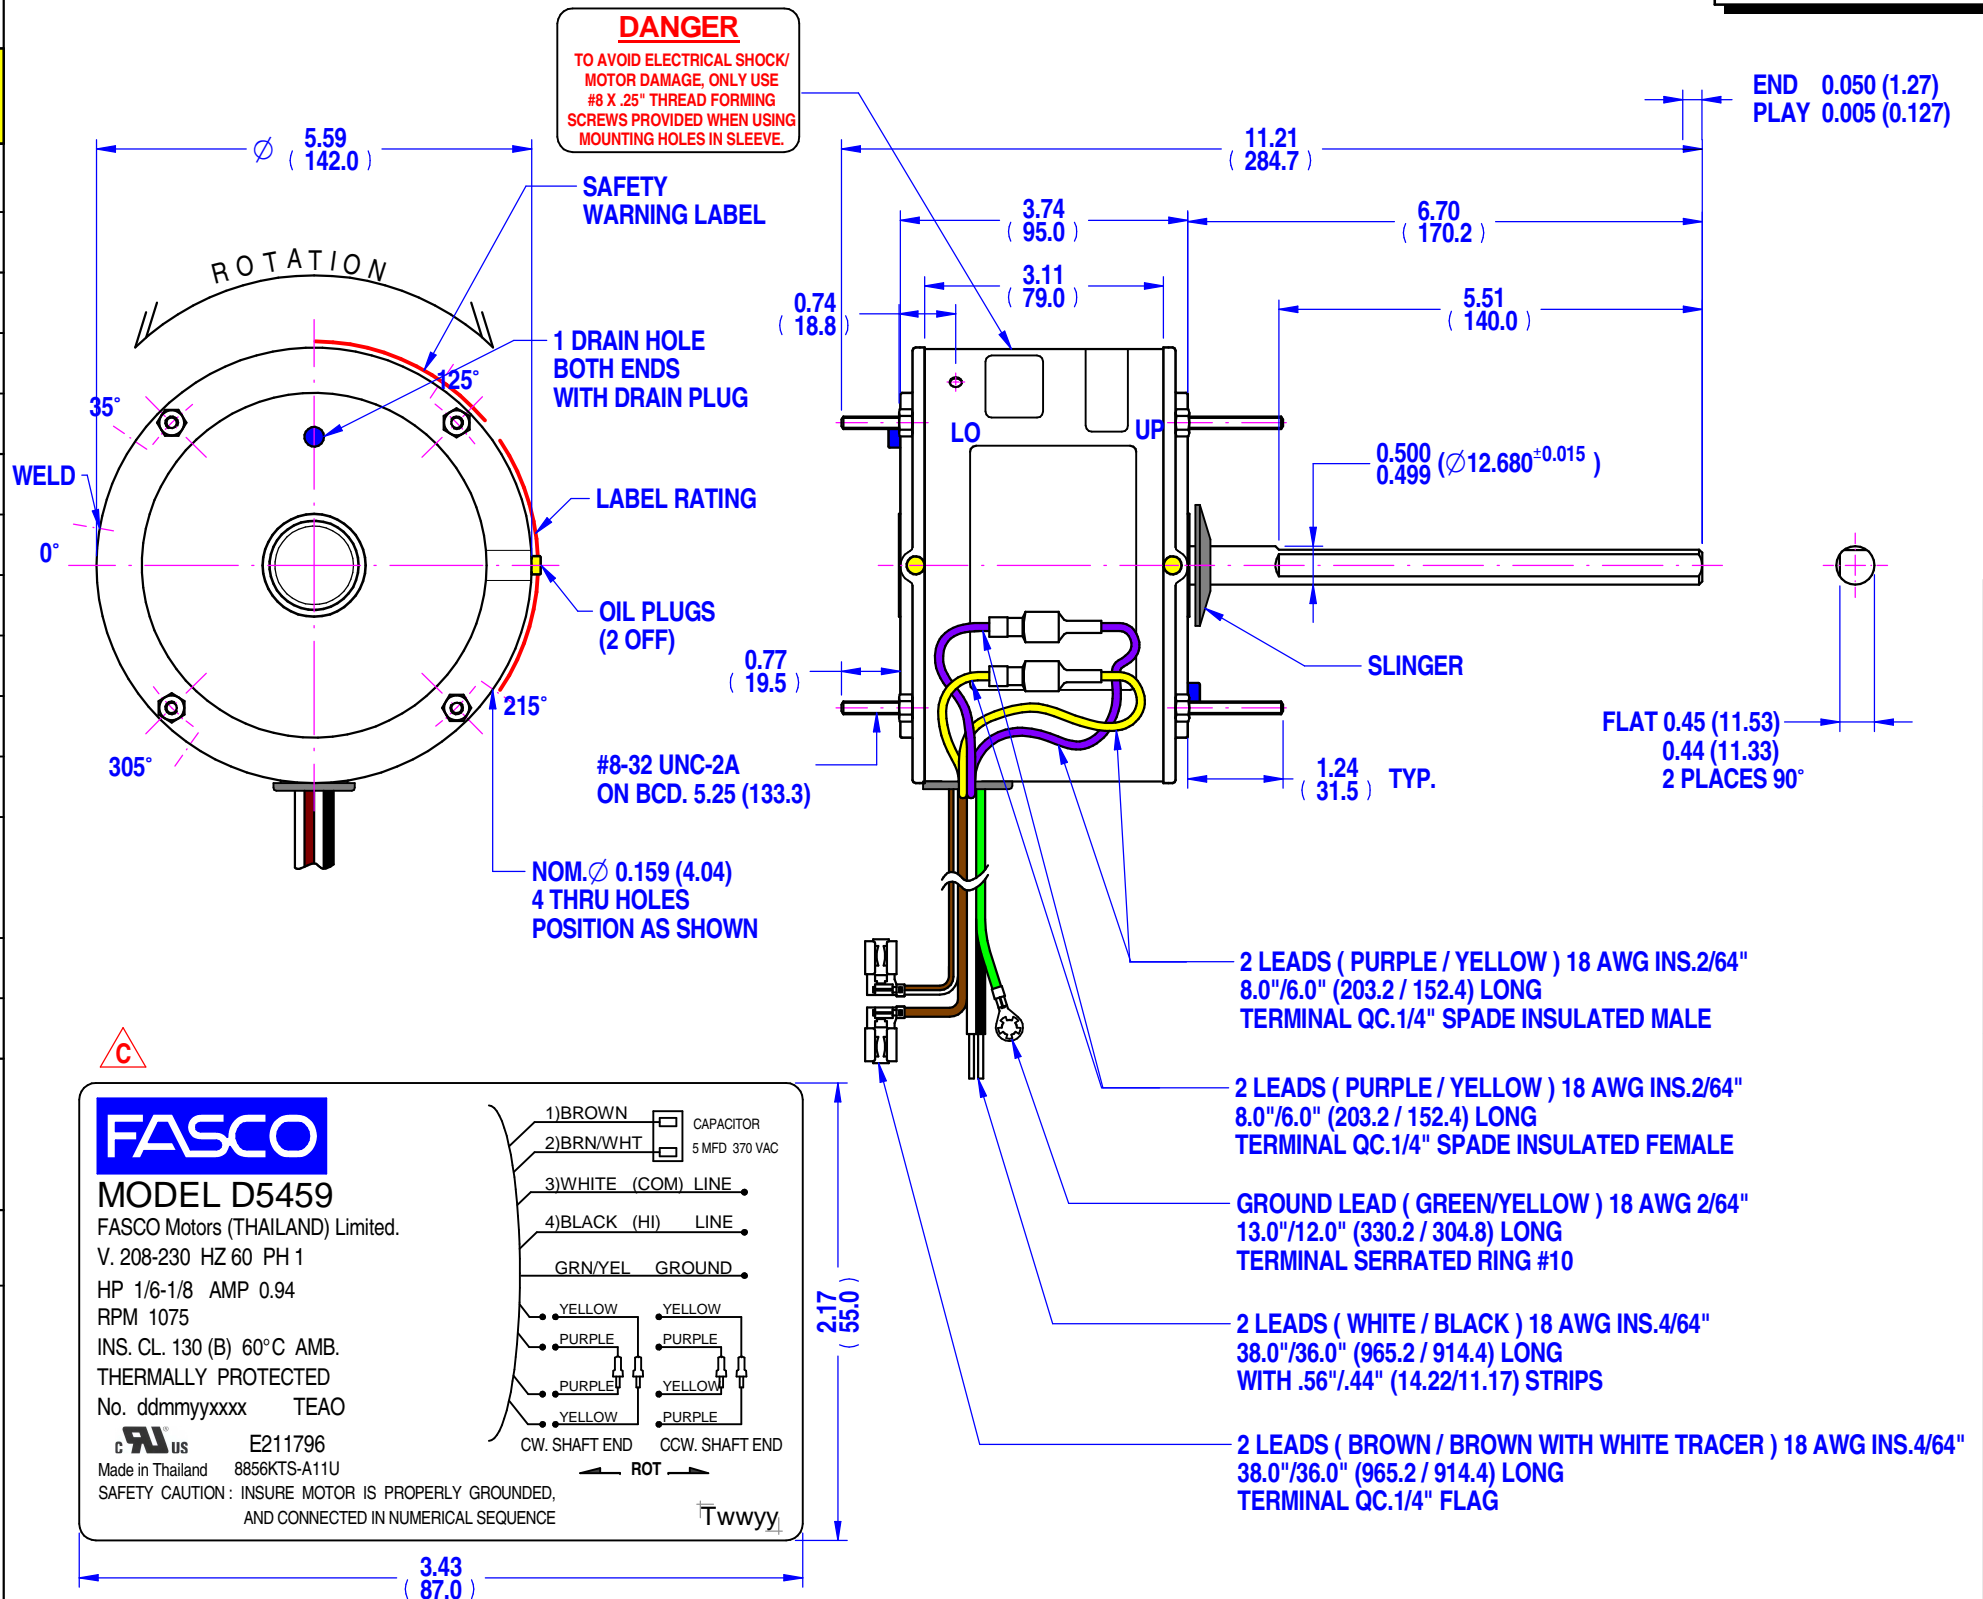

NOTE: DIMENSIONS SHOWN INCH (mm.)  
STK-26

**SPECIAL REQUIREMENTS:**

- 1)\_CAPACITOR SUPPLIED BY CUSTOMER.
- 2)\_SCREW (SM13-13 / 4 EA) AND WASHER LOCK (SM19-1 / 4 EA) TO BE PACKED IN PLASTIC BAG AND PUT INTO INDIVIDUAL CARTON WITH MOTOR, IN CASE OF SINGLE PACKING.
- 3)\_STAMP FDC PART NUMBER FDC-D5459 ON THE BULK PACK.
- 4)\_ADD SAFETY BOOK P/N 398-063-02 IN ALL INDIVIDUAL CARTON.

**UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM. TOLERANCES**

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.1	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

MOTOR WEIGHT	4.6 kg.	
DRAWN	Pipat	05/06/2013
CHECKED	Pipat	07/05/2018
RELEASED	Suksakorn	08/05/2018
SCALE	N.T.S.	

**FASCO THAILAND**  
29/7-8 MOO 3, BANGKRUAY - SAINOI Rd.,  
BANGKRANG, MUANG NONTABURI DISTRICT,  
NONTABURI 11000 THAILAND

FRAME	MOTOR	
STATUS	R	
SHEET	S008:8856T-093-MCX:FDC	
A3	DWG. NO.	8856KTS-A11U
	REVISION	C