



MOTOR SPECIFICATION

8856NTA-A14U

Q.R. No.	Y004429	CUSTOMER NO.	D7908					
CUSTOMER	FASCO USA							
MOTOR RATING	VOLTS	208/230	Hz	60	Ph	1	Duty	S1 AOM
	RPM.	1075		2.6		AMPS		
	NOM. OUTPUT	323 WATTS (1/3 HP)						
ROTATION	REVERSIBLE							
CAPACITOR	START	-----	μF/V	RUN	7.5/---	μF/V		
ENCLOSURE	T.E.A.O.							
MOTOR TYPE	PSC	INSULATION CLASS	130 (B)					
THERMAL PROTECTION	AUTO RESET OVERLOAD							
APPLICATION	FAN CONDENSING - SHAFT HORIZONTAL							
BEARING D.E.	6202 ZZ		LUBRICATION	LONG LIFE, WIDE RANGE				
BEARING N.D.E.	6202 ZZ							
SUPPLY LEAD	AS SHOWN							
EARTH PROVISION	SUPPLIED							
BASIC BUILD SPECIFICATION	305-881-16	PAINT/ COLOUR	PC GREY PLAIN E/SHIELDS					
PERFORMANCE SPECIFICATION	SP88012-01	RATING LABEL	AS SHOWN					
CONNECTION DIAGRAM	AS SHOWN							

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION.

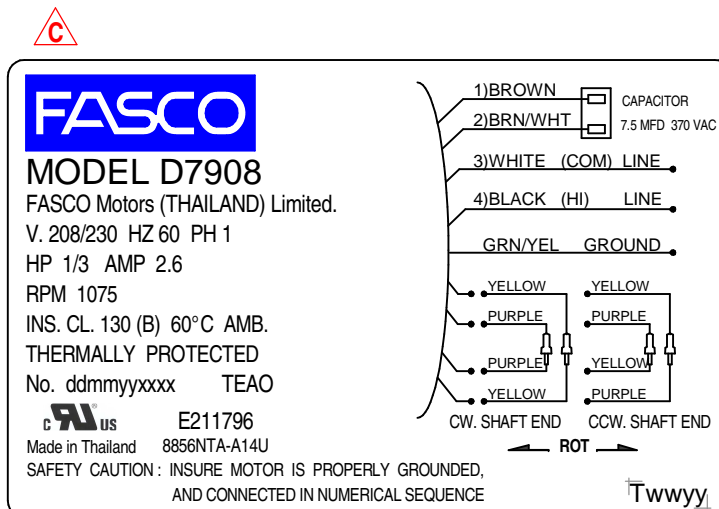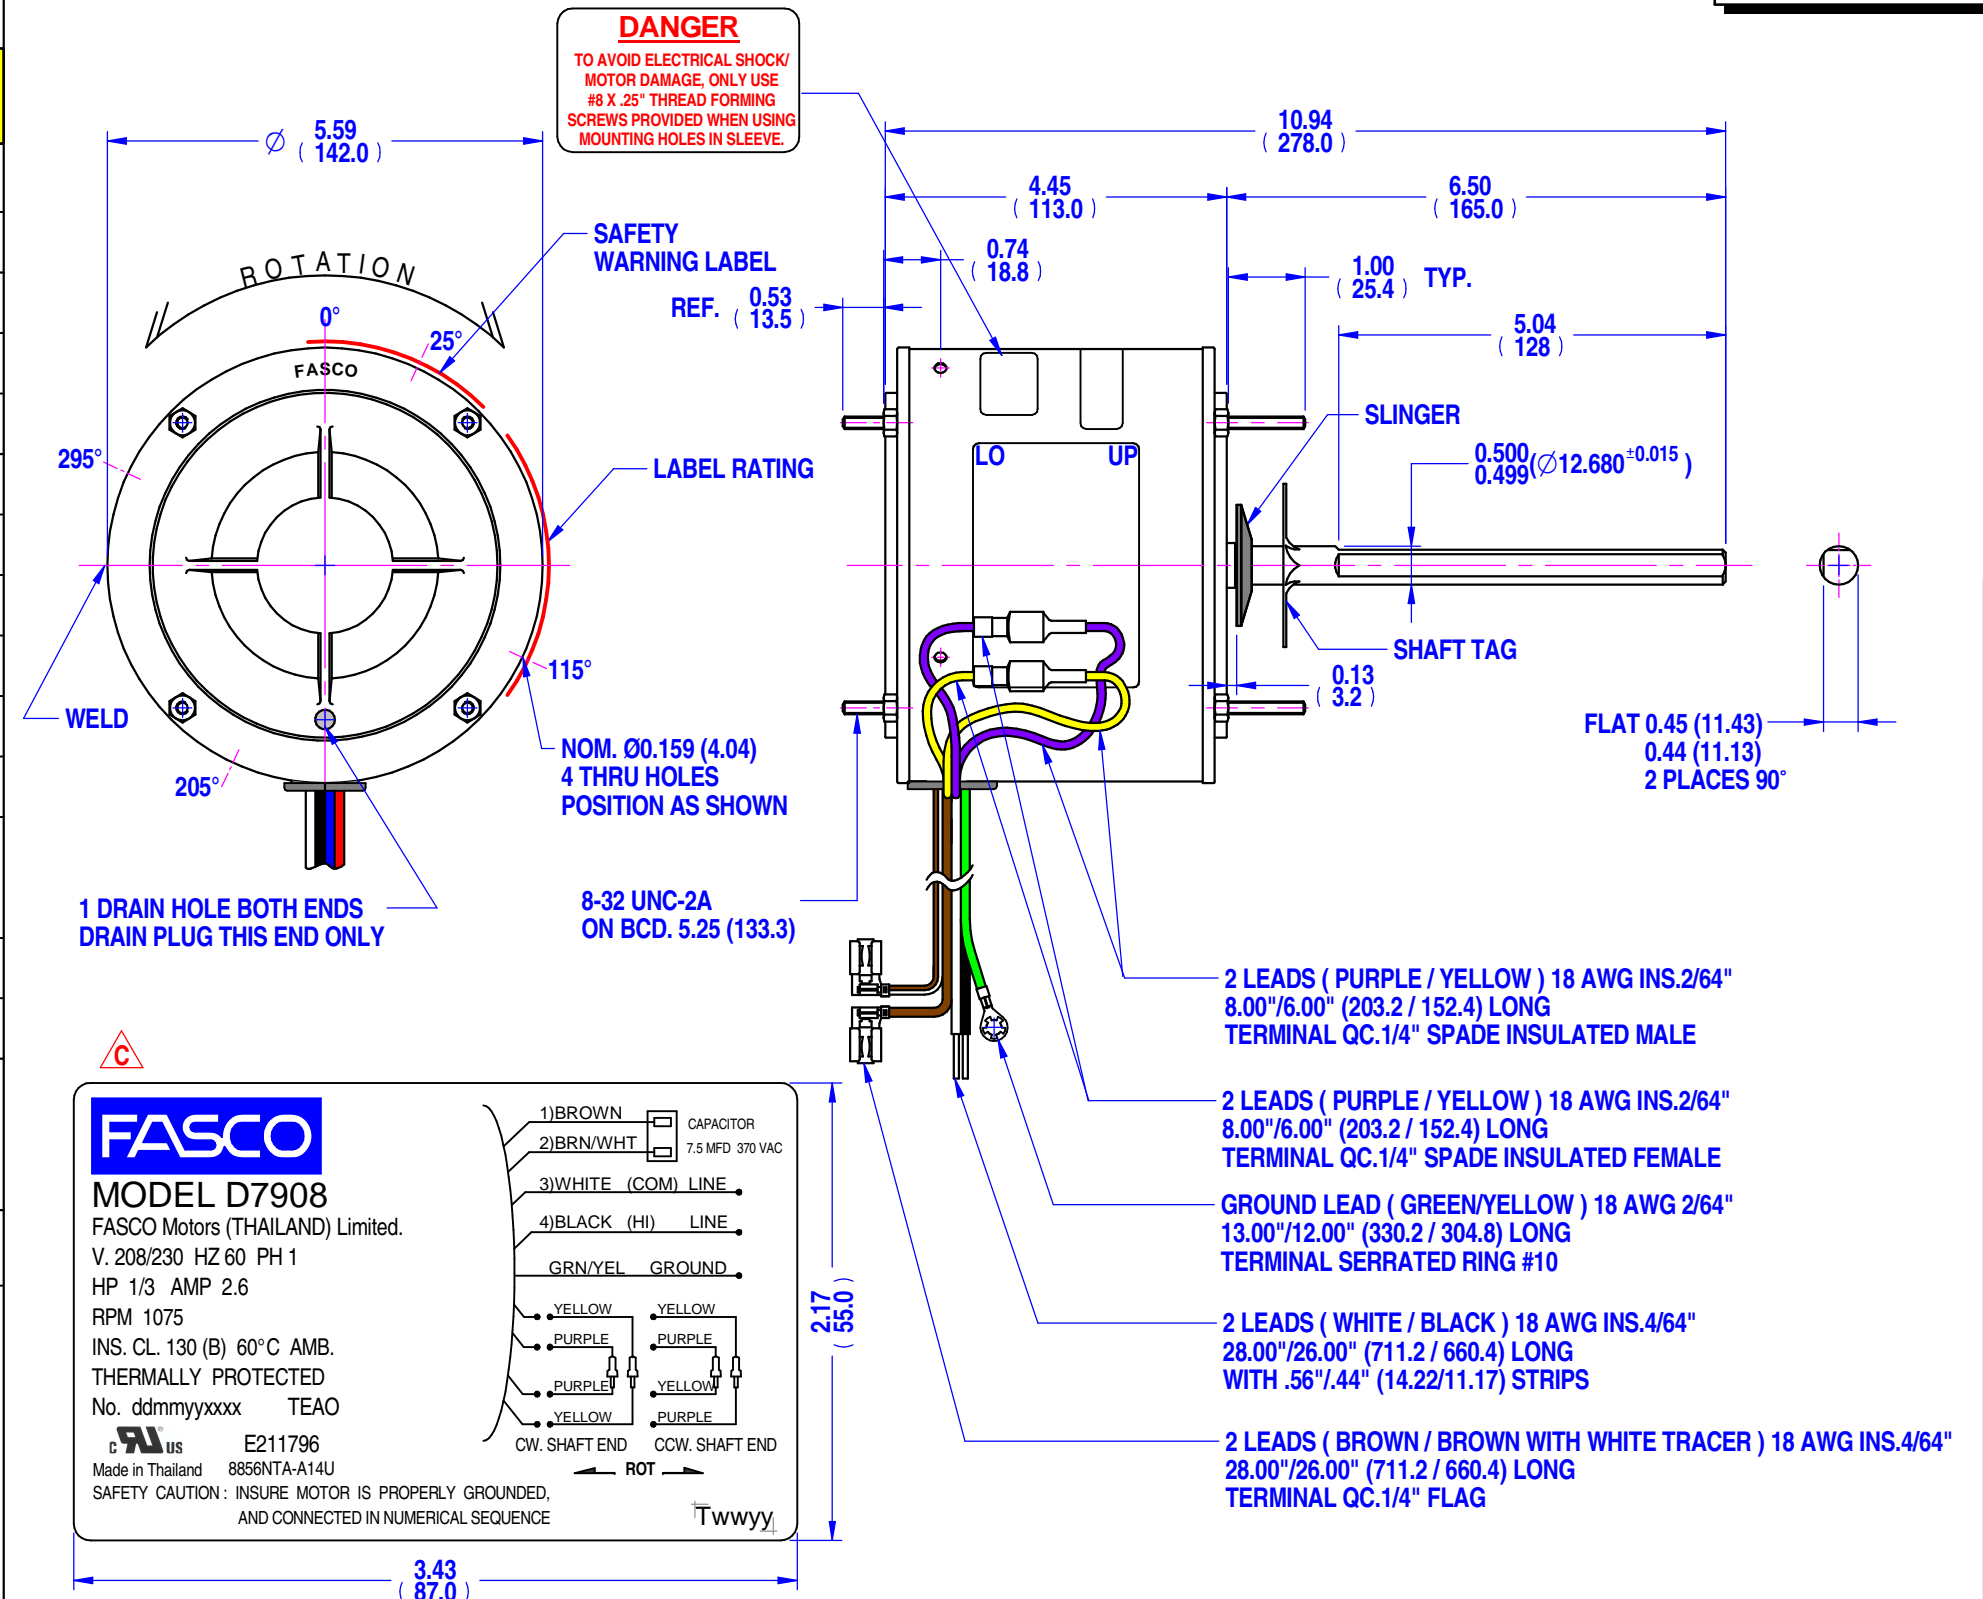

NOTE : DIMENSIONS SHOWN INCH (mm.)
STK - 44

SPECIAL REQUIREMENTS:

- CAPACITOR SUPPLIED BY CUSTOMER.
- DO NOT PACK MOTOR IN PLASTIC BAG.
- SCREW (SM13-13 / 4 EA) AND WASHER LOCK (SM19-1 / 4 EA) TO BE PACKED IN PLASTIC BAG AND PUT INTO INDIVIDUAL CARTON WITH MOTOR, IN CASE OF SINGLE PACKING.
- STAMP FDC PART NUMBER FDC-D7908 ON THE BULK PACK.
- ADD SAFETY BOOK P/N 398-063-02 IN ALL INDIVIDUAL CARTON.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.1	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

MOTOR WEIGHT	6.4 kg.	
DRAWN	muntana	09/07/2013
CHECKED	Pipat	24/08/2017
RELEASED	Sutthipant	24/08/2017
SCALE	N.T.S.	

FASCO THAILAND
29/7-8 MOO 3, BANGKRUAY - SAINOI Rd.,
BANGKRANG, MUANG NONTABURI DISTRICT,
NONTABURI 11000 THAILAND

FRAME	MOTOR	
STATUS	R	
SHEET	B012:8856T-323-MCU:FDC	
A3	DWG. NO.	8856NTA-A14U
	REVISION	C