


**MOTOR SPECIFICATION**

**8856JTS-A11U**

Q.R. No.	Y005169	CUSTOMER NO.	D847
CUSTOMER	FASCO USA		
MOTOR RATING	VOLTS	208/230	Hz 60 Ph 1 Duty S1 AOM
	RPM.	1125	0.63 $\Delta$ AMPS
	NOM. OUTPUT	100 WATTS (1/8 HP)	
ROTATION	ANTI CLOCK WISE DRIVE END		
CAPACITOR	START	----- $\mu$ F/V	RUN 5/--- $\mu$ F/V
ENCLOSURE	T.E.A.O.		
MOTOR TYPE	PSC	INSULATION CLASS	130 (B)
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN CONDENSING - SHAFT HORIZONTAL		
BEARING D.E.	SLEEVE	LUBRICATION	PERMAWICK OPERA.TEMP -15°~90°C
BEARING N.D.E.	SLEEVE		
SUPPLY LEAD	AS SHOWN		
EARTH PROVISION	SUPPLIED		
BASIC BUILD SPECIFICATION	305-881-20	PAINT/ COLOUR	PC GREY PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP88026-01		
CONNECTION DIAGRAM	AS SHOWN	RATING LABEL	AS SHOWN




**SAFETY WARNING**  
THIS MOTOR MUST BE GROUNDED IN ACCORDANCE WITH LOCAL OR NATIONAL ELECTRICAL CODES TO PREVENT POSSIBLE INJURY DUE TO ELECTRICAL SHOCK P071946

0.55 (14.0)

2.44 (62.0)

**FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)**

THIRD ANGLE PROJECTION.

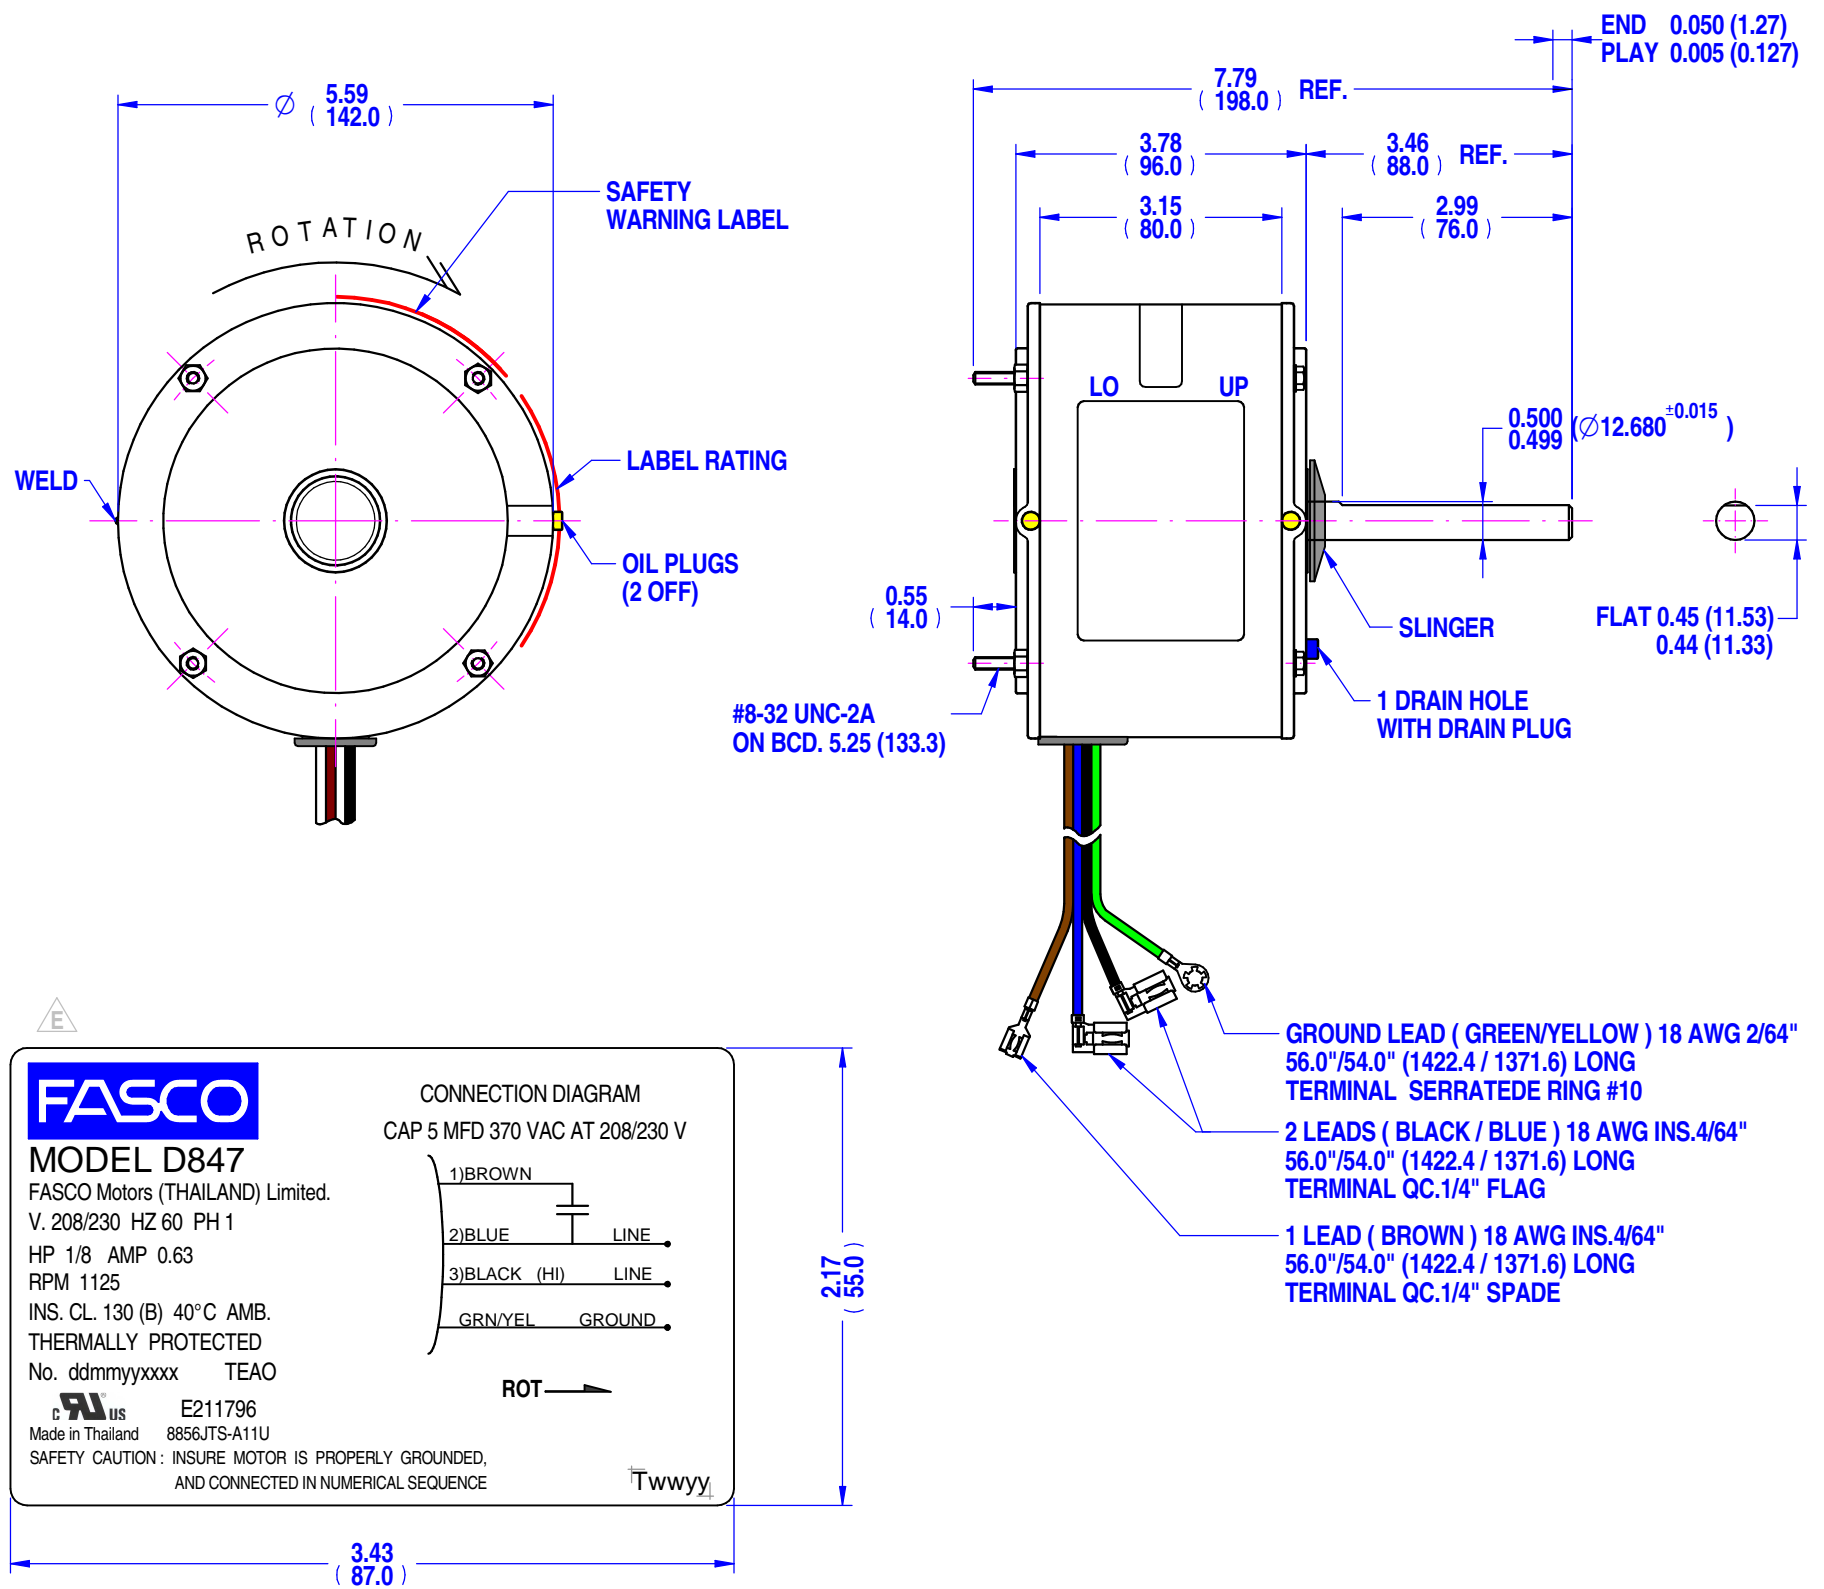

NOTE : DIMENSIONS SHOWN INCH (mm.)  
STK-26

**SPECIAL REQUIREMENTS:**

- 1)\_CAPACITOR SUPPLIED BY CUSTOMER.
- 2)\_STAMP FDC NUMBER FDC-D847 ON THE BULK PACK.
- 4)\_ADD SAFETY BOOK P/N 398-063-02 IN ALL INDIVIDUAL CARTON.

**UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES**

DECIMALS	ANGULAR
.X $\pm$ 1.0	$\pm$ 30'
.XX $\pm$ 0.1	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

MOTOR WEIGHT	4.5 $\Delta$ kg.	
DRAWN	muntana	24/10/2013
CHECKED	Pipat	06/09/2018
RELEASED	Kanapote	17/09/2018
SCALE	N.T.S.	

**FASCO THAILAND**  
29/7-8 MOO 3, BANGKRUAY - SAINOI Rd., BANGKRANG, MUANG NONTHABURI DISTRICT, NONTHABURI 11000 THAILAND

FRAME	MOTOR	
STATUS	R	
SHEET	DWG. NO.	REVISION
A3	8856JTS-A11U	F

MIC1806326 By: Pongpun Date:06/09/2018 MIC F: Add motor weight 4.5 kg