



MOTOR SPECIFICATION

8856KTS-A12U

Q.R. No.	Y005171	CUSTOMER NO.	D919
CUSTOMER	FASCO USA		
MOTOR RATING	VOLTS	208-230	Hz 60 Ph 1 Duty S1 AOM
	RPM.	1075	0.79 Δ AMPS
NOM. OUTPUT		118 WATTS(1/8 HP)	
ROTATION		REVERSIBLE	
CAPACITOR	START	-----	μ F/V RUN 5/--- μ F/V
ENCLOSURE		T.E.A.O.	
MOTOR TYPE	PSC	INSULATION CLASS	130 (B)
THERMAL PROTECTION		AUTO RESET OVERLOAD	
APPLICATION		FAN CONDENSING - SHAFT HORIZONTAL	
BEARING D.E.	SLEEVE	LUBRICATION	PERMAWICK OPERA.TEMP -15°~90° C
BEARING N.D.E.	SLEEVE		
SUPPLY LEAD		AS SHOWN	
EARTH PROVISION		SUPPLIED	
BASIC BUILD SPECIFICATION	305-881-04	PAINT/ COLOUR	PC GREY PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP88022-01		
CONNECTION DIAGRAM	AS SHOWN	RATING LABEL	AS SHOWN

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION.

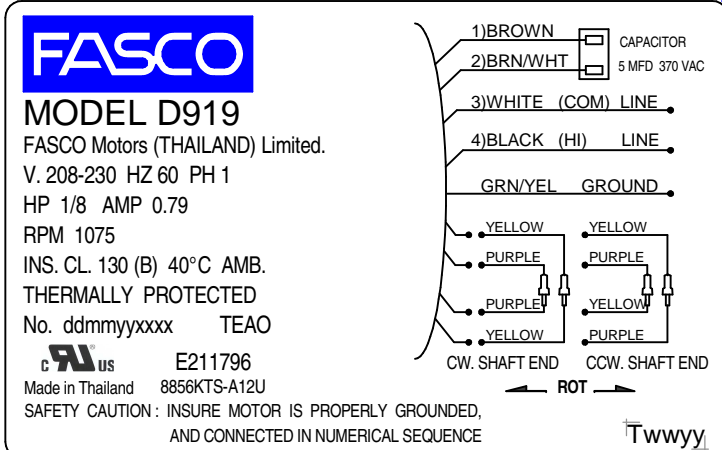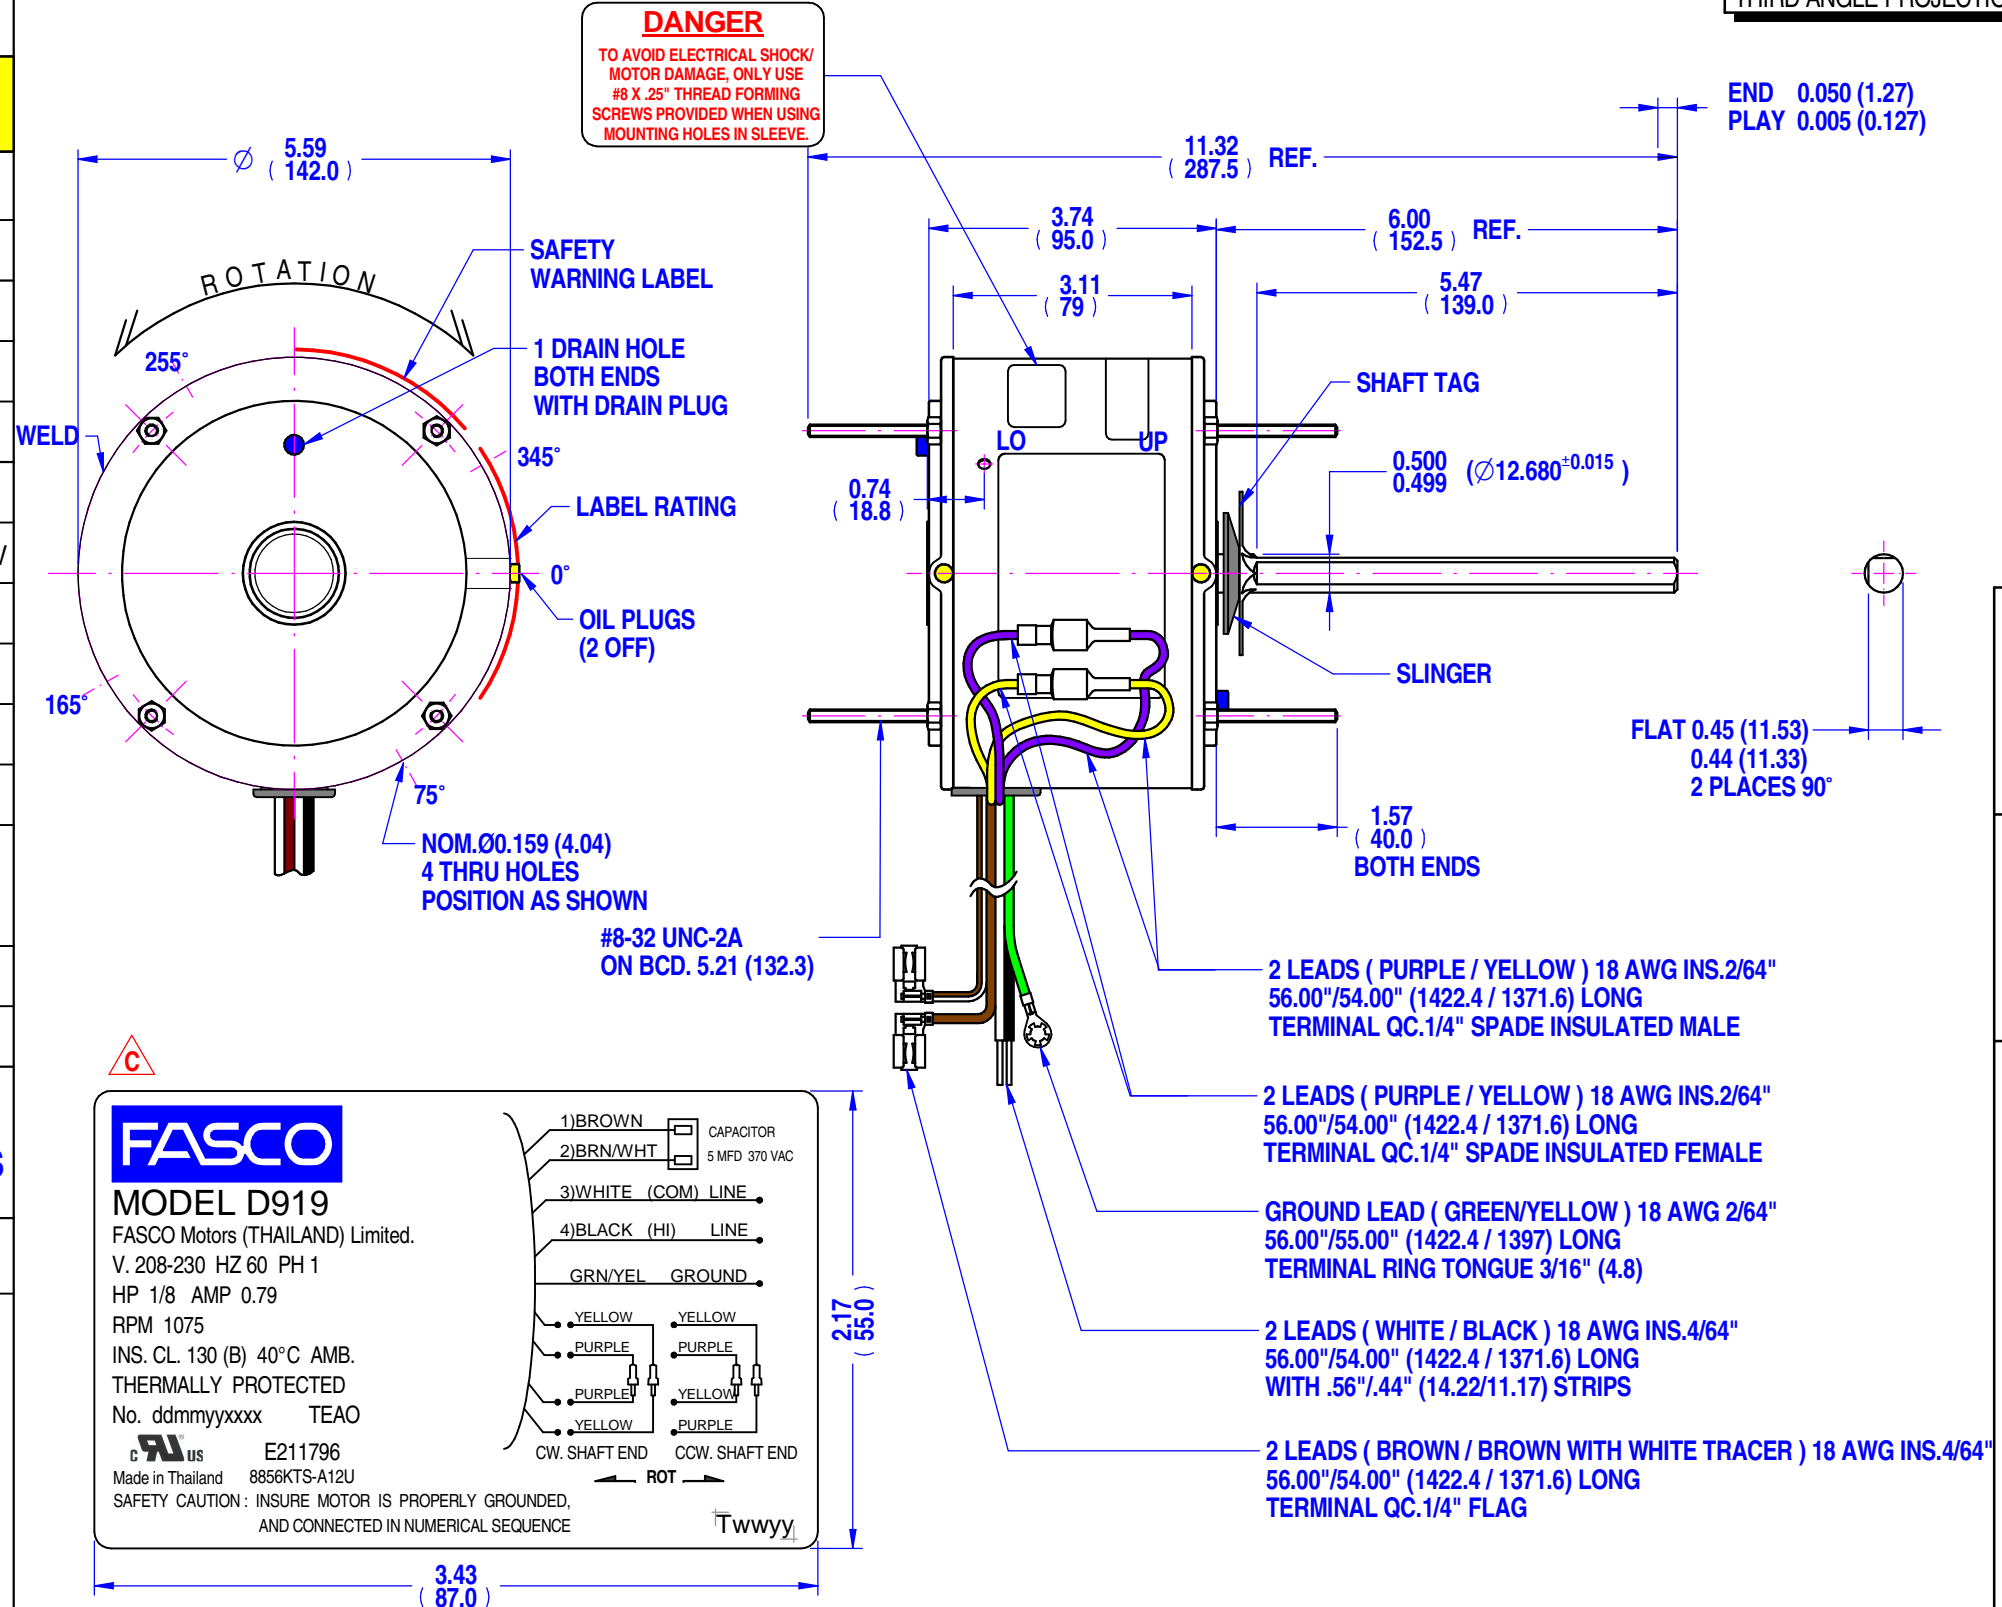

NOTE : DIMENSIONS SHOWN INCH (mm.)
STK - 26

SAFETY WARNING
THIS MOTOR MUST BE GROUNDED IN ACCORDANCE WITH LOCAL OR NATIONAL ELECTRICAL CODES TO PREVENT POSSIBLE INJURY DUE TO ELECTRICAL SHOCK
P071946

SPECIAL REQUIREMENTS:

- 1)_CAPACITOR SUPPLIED BY CUSTOMER.
- 2)_SCREW (SM13-13 / 4 EA) AND WASHER LOCK (SM19-1 / 4 EA) TO BE PACKED IN PLASTIC BAG AND PUT INTO INDIVIDUAL CARTON WITH MOTOR, IN CASE OF SINGLE PACKING.
- 3)_STAMPED FDC PART NUMBER FDC-D919 ON THE BULK PACK.
- 4)_ADD SAFETY BOOK P/N 398-063-02 IN ALL INDIVIDUAL CARTON.

UNLESS OTHERWISE SPECIFIED :
DIMENSIONS ARE IN MM.
TOLERANCES

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.1	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

MOTOR WEIGHT	4.6 kg.	
DRAWN	muntana	24/10/2013
CHECKED	Pipat	18/04/2018
RELEASED	Suksakorn	18/04/2018
SCALE	N.T.S.	

FASCO THAILAND
29/7-8 MOO 3, BANGKRUAY - SAINOI Rd.,
BANGKRANG, MUANG NONTABURI DISTRICT,
NONTABURI 11000 THAILAND

FRAME	MOTOR	
STATUS	R	
SHEET	S022:8856T-118-MCX:FDC	
A3	DWG. NO.	8856KTS-A12U
	REVISION	C