




RBC PROPRIETARY AND CONFIDENTIAL INFORMATION
 This document is the property of REGAL-BELOIT CORPORATION ("RBC") including its subsidiaries and divisions and contains proprietary information of RBC. This document is loaned on the express condition that neither it nor the information contained therein shall be disclosed to others without the express written consent of RBC and that the information shall be used by the recipient only as approved expressly by RBC. This document shall be returned to RBC upon its request. This document may be subject to certain restrictions under the U.S. export control laws and regulations.

STOCK 3458

REVISIONS	
REV	DESCRIPTION
	2 LD EXIT CORRECTED TO 290, 05-3203 JS
	3 LD SHOWN FOR 290
	4.SHAFT EXT CHGD TO 6.5", 07-1120,JS

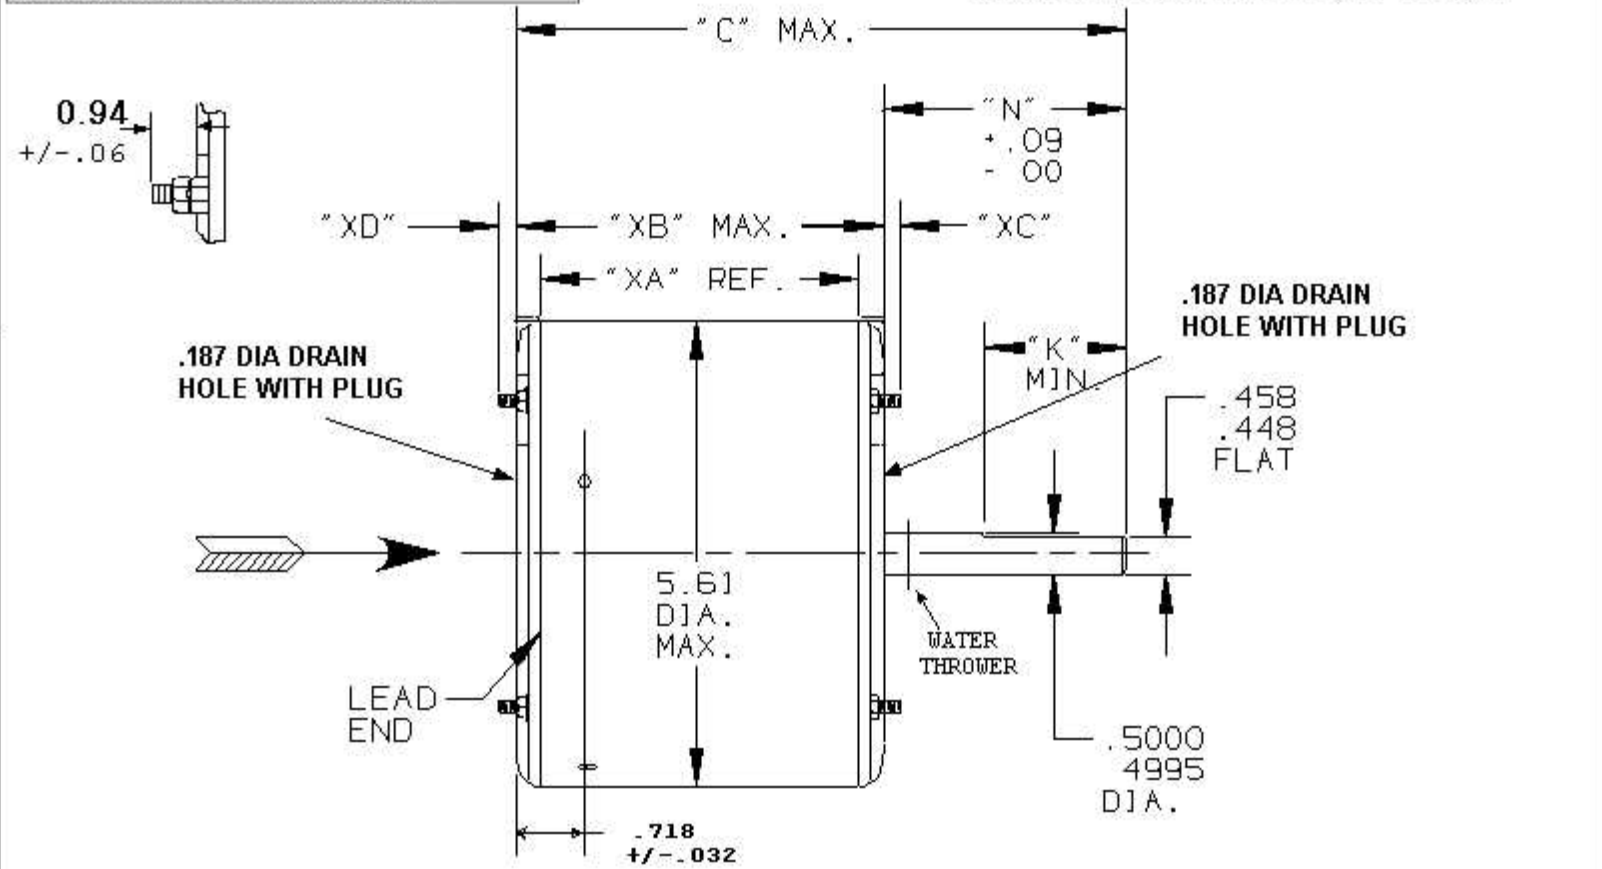

#8-32 thread-These screws fit a gage having (4) holes .1910 dia. located on basic position

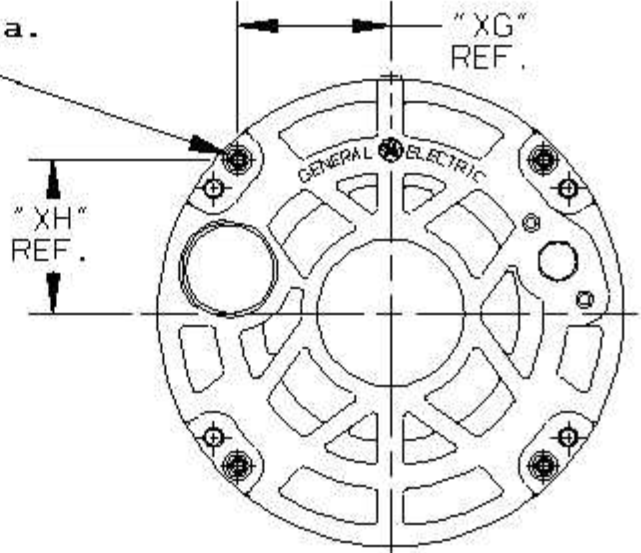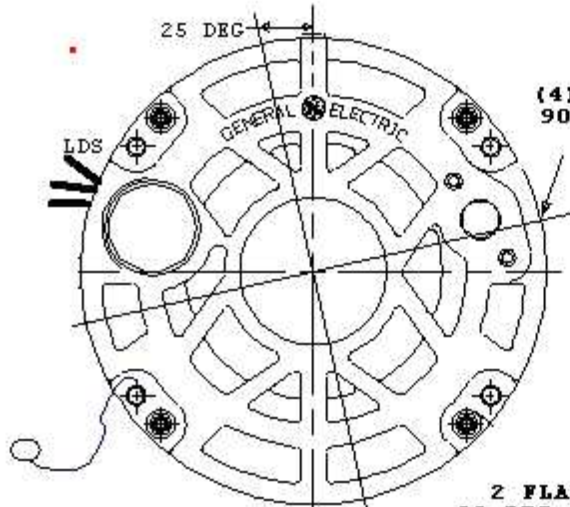

Clampscrew position when "XC" or "XD" exceed .14". If "XC" or "XD" = .14 it is a max. dimension, but if greater than .14, value given is -.00/+.14. If extra nuts are furnished for spacing, dimension is from nut next to endshield.

11.05	6.50	5.50		3.82	4.48	-	SEE ABOVE	1.838	1.838
"C"	"N"	"K"		"XA"	"XB"	"XC"	"XD"	"XG"	"XH"

Additional details (Viewing Lead end)

Rotation CCW/CW viewed in direction of arrow.
Ventilation System:
 Shell vents - CLOSED
 End shield (opp. lead end) - CLOSED
 End shield (lead end) - CLOSED
 Leads exit thru SHELL 290 degrees CW from top of motor viewed in direction of arrow.

REGAL-BELOIT CORPORATION
FORT WAYNE, INDIANA

MOTOR OUTLINE

MODEL 5KCP39JGU530 S	ISSUED RB 12/04/03	SCALE NO
--------------------------------	------------------------------	--------------------

MODEL

CAD. NO. FF1NR4