


# Uncontrolled Copy



CONFIDENTIAL AND PROPRIETARY  
 This document is the property of General Electric. It contains proprietary and confidential information of GE Motor Business Group (MBC). The document is issued on the express condition that neither it nor the information contained therein shall be disclosed to others without the express consent of GE and that the information shall be used by the recipient only, on approved equipment by GE. Also, the document shall be returned to GE upon its request.

GE STOCK #3682

REVISIONS  
 1 JAR 08/20/97 TO ELECTRIC FORMAT  
 2 GAS 01/09/00 REMOVE LERS

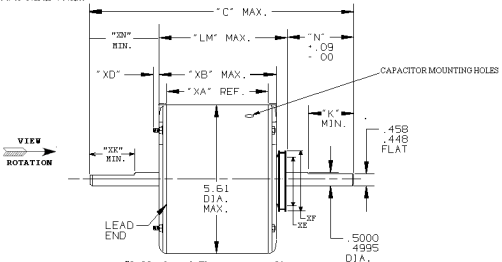

#8-32 thread-These screws fit a gage having (4) holes .1910 dia. located on basic hole position.



GROUND LEAD ON OFF LEAD END

**ADDITIONAL DETAILS  
 (VIEWING LEAD END)**

Clampscrew position when "XC" or "XD" exceed .14"  
 If "XC" or "XD" = .14 it is a Max. dim.  
 but if greater than .14, value given is -.00/+ .14.  
 If extra nuts are furnished for spacing,

20.00	7.50	7.27	7.10	6.90	5.14	4.07	4.73	-	1.50	2.22	2.25	1.838	1.838	6.62 5.37
C	N	XN	K	XK	LM	XA	XB	XC	XD	XE	XF	XG	XH	YO

ROTATION CCW VIEWED IN DIRECTION OF ARROW.  
 VENTILATION SYSTEM  
 SHELL OPEN BOTTOM 180°  
 OPPOSITE LEAD END SHIELD OPEN  
 LEAD END SHIELD OPEN  
 LEADS EXIT THRU SHIELD 90 DEGREES FROM TOP OF MOTOR VIEWED IN DIRECTION OF ARROW

GENERAL MOTOR BUSINESS GROUP		ELECTRIC FORT WAYNE, INDIANA	
<b>MOTOR OUTLINE</b>			
MODEL	ISSUED	SCALE	
5KCP39JG5831ET	RAW 4/23/75	NO	

CAD. NO. FR2N

CAD. NO. FR2N

(01M60) ⬆