
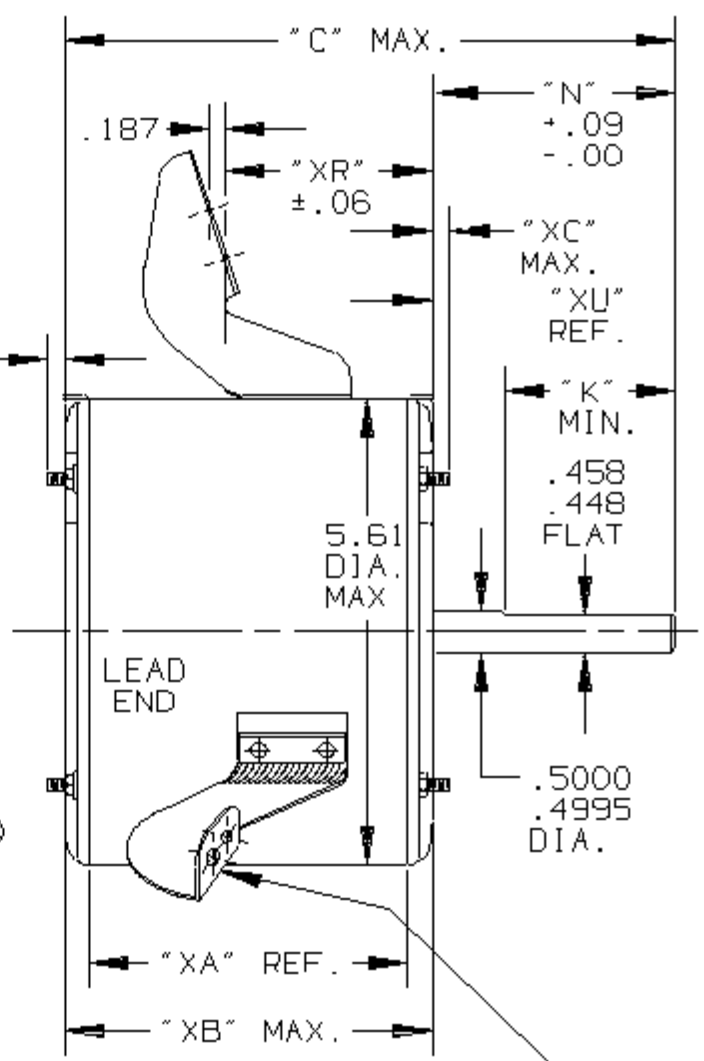
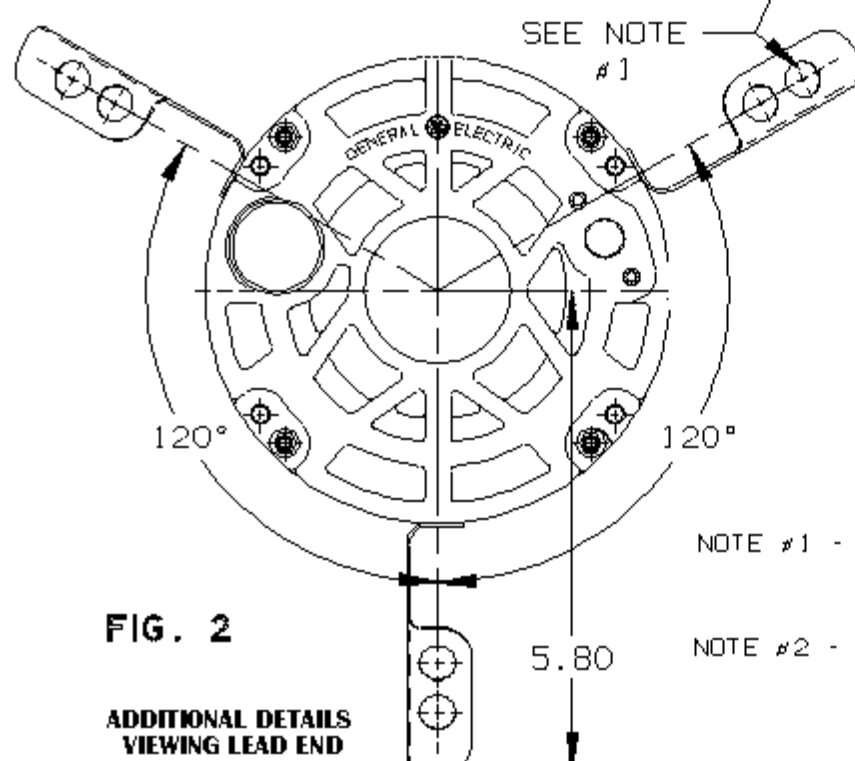


**RBC PROPRIETARY AND CONFIDENTIAL INFORMATION**  
 This document is the property of REGAL-BELOIT CORPORATION ("RBC") including its subsidiaries and divisions and contains proprietary information of RBC. This document is loaned on the express condition that neither it nor the information contained there in shall be disclosed to others without the express written consent of RBC and that the information shall be used by the recipient only as approved expressly by RBC. This document shall be returned to RBC upon its request. This document may be subject to certain restrictions under the U.S. export control laws and regulations.

STOCK

REVISIONS	
REV	DESCRIPTION
1	JMR 7/28/93 TI93 29/39 65
2	CAS 7/15/01 ELEC FORMAT
3	Modified as per CR #05-1777 BM 09/13/05
4	Incremented due to NM issue SN 12/21/2005

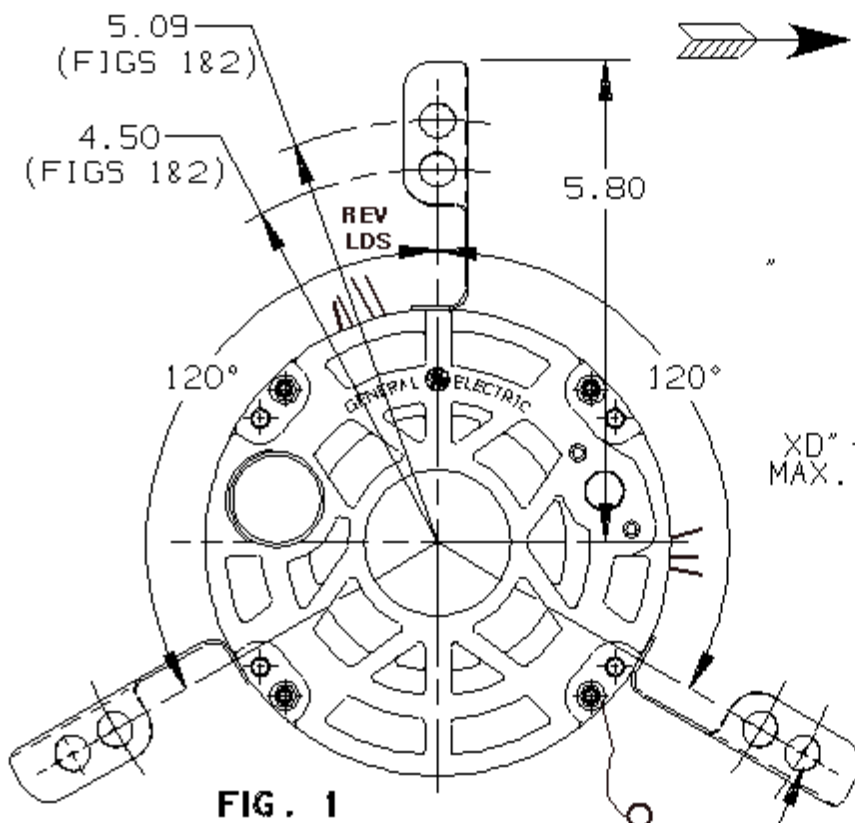

**LUGS FOR 9/10" BLOWER WHEEL GROMMETS IN 9" HOLES IN LUGS ARE FOR .25 DIA SCREW**

**MAX VARIATION BETWEEN ALL LUG MOUNTING SURFACES IS .040"**

- NOTE #1 - THE THREE LUGS SHOULD FIT A CONICAL GAGE PLATE WITH THREE PINS .25 DIAMETER LOCATED ON THE BASIC POSITIONS
- NOTE #2 - ROTATION AND LEAD LOCATION IN DEGREES FROM TOP OF MOTOR ARE GIVEN AS VIEWED IN THE DIRECTION OF ARROW.

9.30	5.00	4.50	3.57	4.23	.14		3.00	1
"C"	"N"	"K"	"XA"	"XB"	"XC"	"XD"	"XR"	LUG FIG.

ROTATION **CW/CW** VIEWED IN DIRECTION OF ARROW.  
 VENTILATION SYSTEM  
 SHELL - OPEN  
 OPPOSITE LEAD END SHIELD - OPEN  
 LEAD END SHIELD - OPEN  
 LEADS EXIT THRU SHELL 90 DEGREES FROM TOP OF MOTOR VIEWED IN DIRECTION OF ARROW



**REGAL-BELOIT CORPORATION**  
 FORT WAYNE, INDIANA

**MOTOR OUTLINE**

MODEL	1199L6D	SCALE
5KCP39GGP730 S	CAS 6/20/90	4