

CONFIDENTIAL AND PROPRIETARY

This document is the property of General Electric Company and contains proprietary and confidential information of the Motor Business Group (MBG). The document is loaned on the express conditions that neither it nor the information contained therein shall be disclosed to others without the express consent of MBG and that the information shall be used by the recipient only as approved expressly by MBG. Also, the document shall be returned to MBG upon its request.

Uncontrolled Copy
STOCK
ST D G U 7 2 9 5

REVISIONS	
REV	DESCRIPTION
1	REVISE PER TI-93-29/39-65 JMR 7-29-93

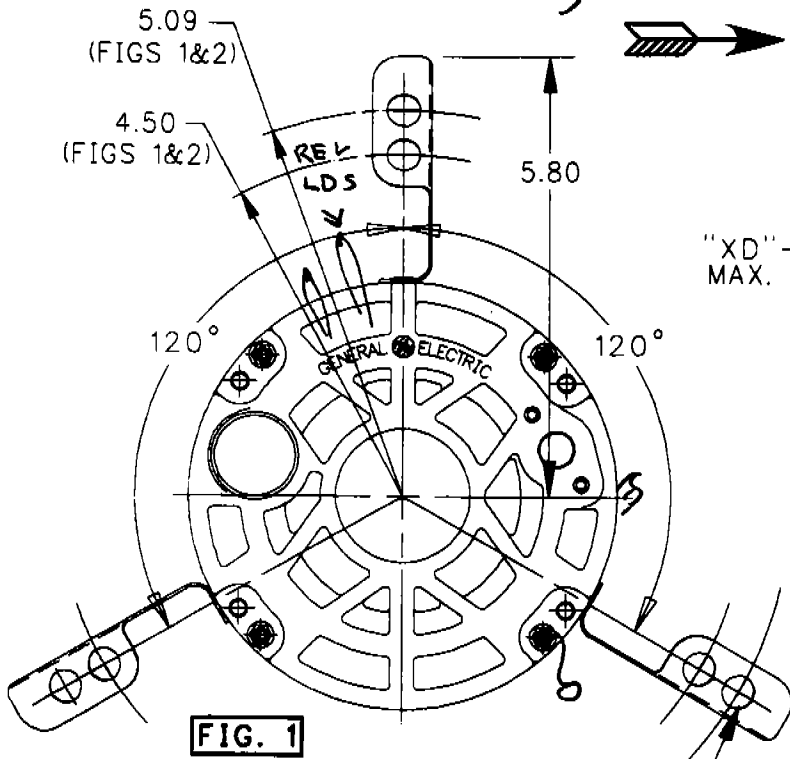


FIG. 1


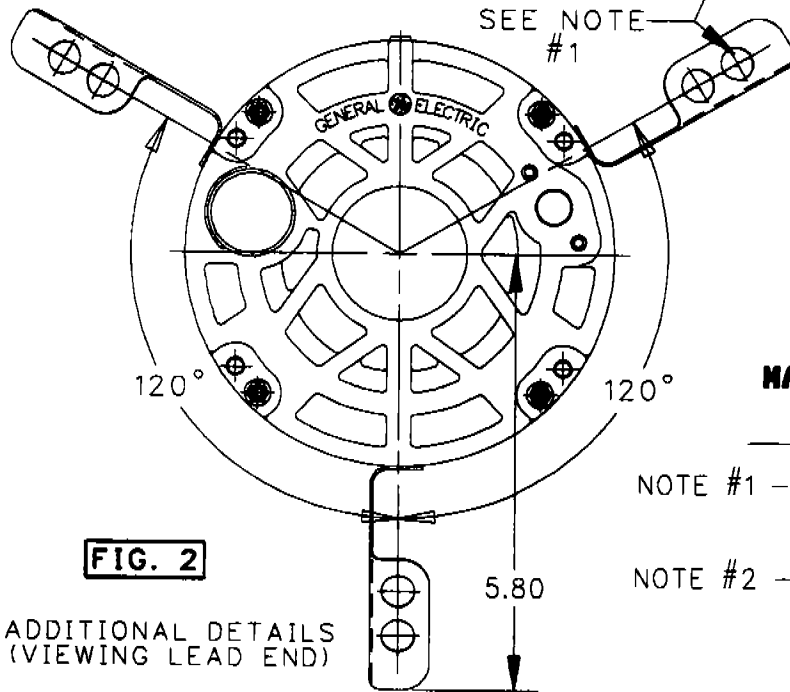


FIG. 2

ADDITIONAL DETAILS (VIEWING LEAD END)

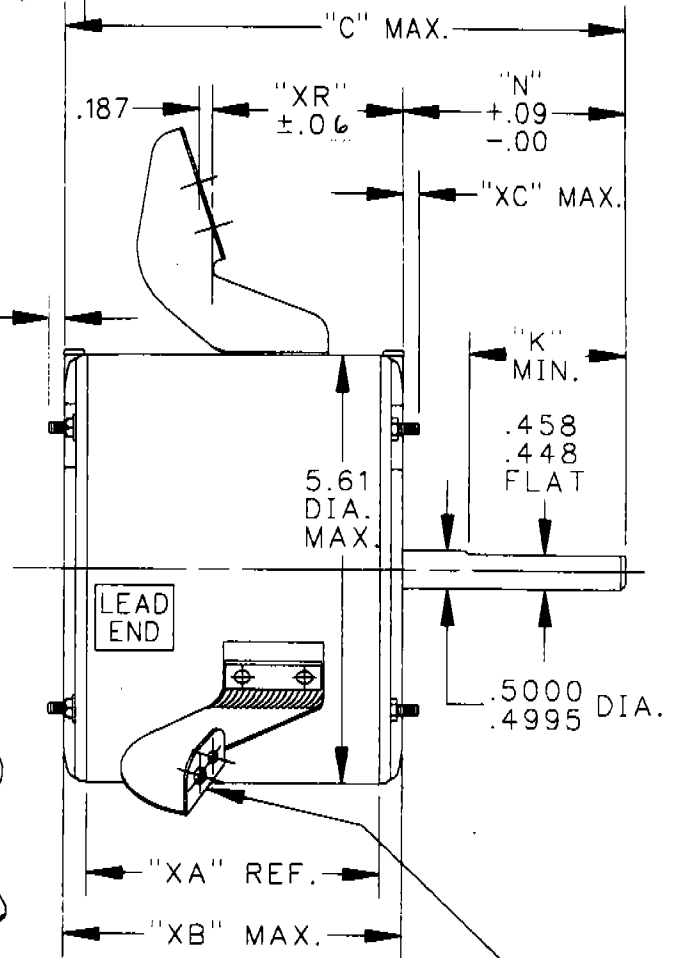

LUGS FOR 9/10" BLOWER WHEEL.

GROMMETS IN 10" HOLES IN LUGS ARE FOR .25 DIA. SCREW.

MAX. VARIATION BETWEEN ALL LUG MOUNTING SURFACES IS .040"

NOTE #1 - THE THREE LUGS SHOULD FIT A CONICAL GAGE PLATE WITH THREE PINS .25 DIAMETER LOCATED ON THE BASIC POSITIONS.

NOTE #2 - ROTATION AND LEAD LOCATION IN DEGREES FROM TOP OF MOTOR ARE GIVEN AS VIEWED IN THE DIRECTION OF ARROW.

10.55	5.0	4.5	4.82	5.48	.14	-	2.81	1
"C"	"N"	"K"	"XA"	"XB"	"XC"	"XD"	"XR"	LUG FIG.

ROTATION *ccw* VIEWED IN DIRECTION OF ARROW.
VENTILATION SYSTEM
SHELL - OPEN
OPPOSITE LEAD END SHIELD - OPEN
LEAD END SHIELD - OPEN
LEADS EXIT THRU SHELL 90 DEGREES FROM TOP OF MOTOR VIEWED IN DIRECTION OF ARROW.

GENERAL ELECTRIC
MOTOR BUSINESS GROUP FORT WAYNE, INDIANA

MOTOR OUTLINE

MODEL	ISSUED	SCALE
5KCP39PGP734S	Case 6-19-90	.4