
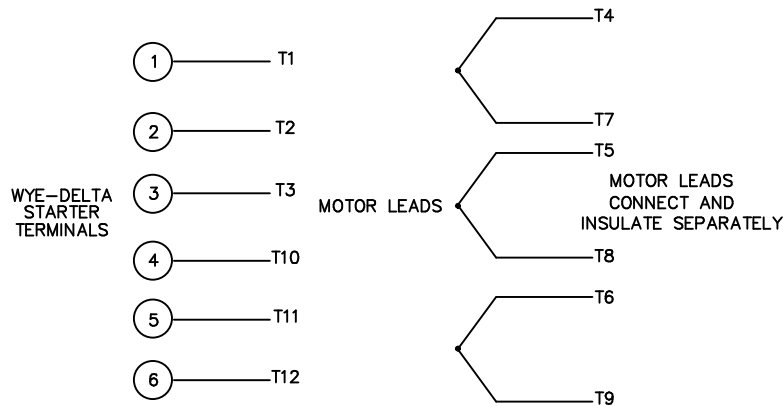



WYE - DELTA STARTING USEABLE ON 2, 4 AND 6 POLE MOTORS.

LOW VOLTAGE CONNECTION


HIGH VOLTAGE CONNECTION

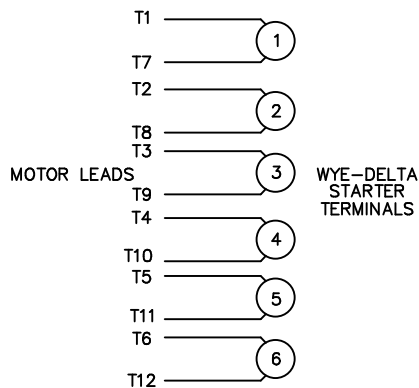

REFER TO THE WYE-DELTA STARTER CONNECTION INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

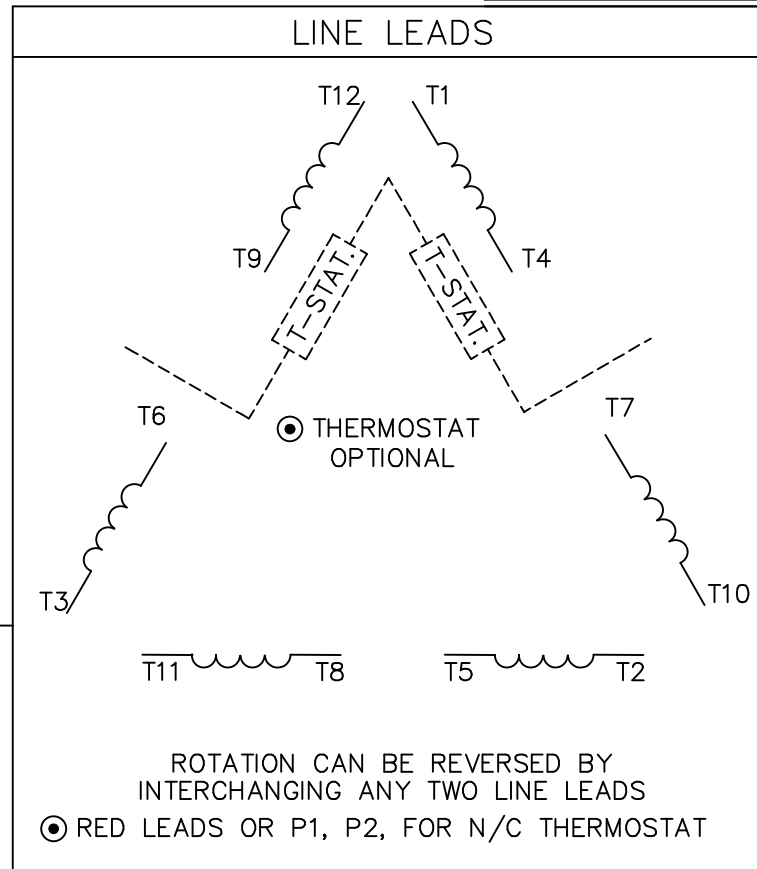

ROTATION CAN BE REVERSED BY INTERCHANGING ANY TWO LINE LEADS
 ● RED LEADS OR P1, P2, FOR N/C THERMOSTAT

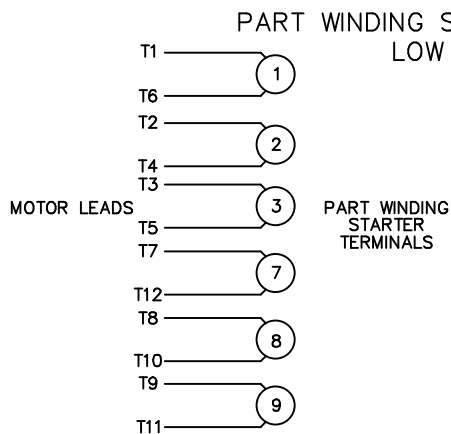

REFER TO THE PART WINDING STARTER INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

REFER TO THE CUTLER-HAMMER OR EQUIV. FOR PROPER SELECTION OF OVERLOAD HEATER COILS.

ACROSS THE LINE START & RUN				
	LINE 1	LINE 2	LINE 3	JOIN & INSULATE SEPARATELY
HIGH VOLT	T1, T12	T2, T10	T3, T11	(T4, T7) (T5, T8) (T6, T9)
LOW VOLT	T1, T6 T7, T12	T2, T4 T8, T10	T3, T5 T9, T11	

				TOLERANCES UNLESS SPECIFIED			DRAWN RJW 07-19-2007	
				DEC.	INCHES		CHK ML 07-19-2007	
				.X	±.1		APPD GK 07-19-2007	
				.XX	±.02		SCALE 1=1	
				.XXX	±.005		REF MU61151	
				.XXXX	±.0005	TITLE DELTA - WYE CONNECTION DIAGRAM		
						MAT'L.		
						FINISH		
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT			RFP	07-19-2007	CAD FILE	004172-01ME	SIZE	DRAWING NO. PAGE 1 OF 1 REV.
			DIST	LB			A	004172-01ME