


SINGLE VOLTAGE-TWO SPEED
PERMANENT SPLIT CAPACITOR
WITH OVERLOAD PROTECTION

CCW ROTATION SHOWN
TO REVERSE, INTERCHANGE YELLOW
WITH PURPLE ON TERMINALS 1 & 4.

- LOW SPEED
- ⑤ ——— LINE 2
 - ② ——— LINE 1
 - ④ ——— PURPLE
 - ① ——— YELLOW
 - ③
- HIGH SPEED
- ⑤
 - LINE 1 ——— ②
 - PURPLE ——— ④
 - YELLOW ——— ①
 - LINE 2 ——— ③

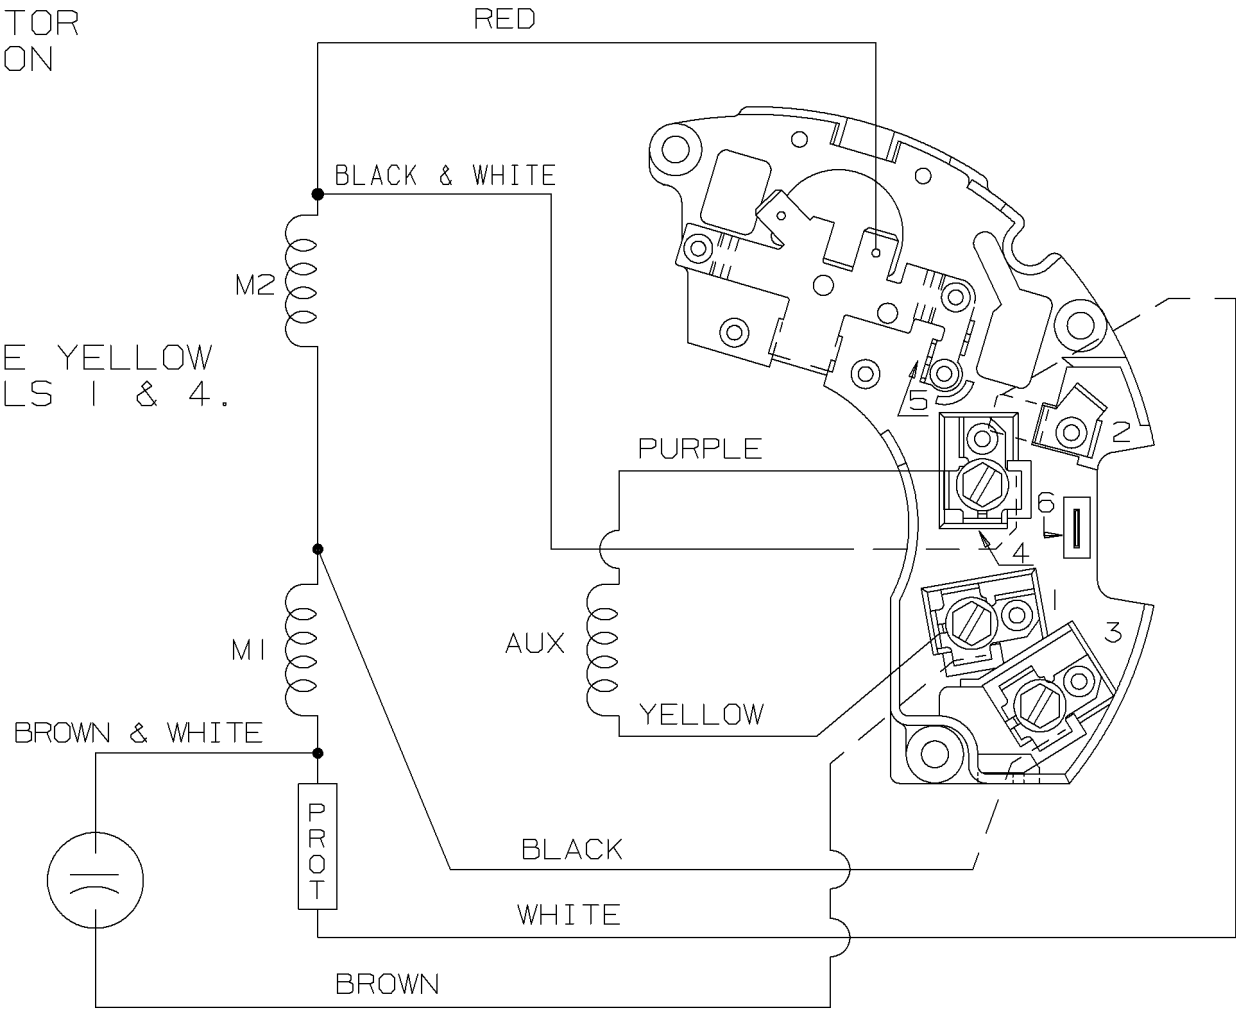

				✓ MAX. SURFACE ROUGHNESS UNLESS NOTED OTHERWISE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL. ON XX± .02 XXX± .005 XXXX± .0005 ANGLES± 7"30"		
				MATL SPEC			DRAWN BY DRS 01-11-2001
				FINISH			CHKD BY ML 01-23-2001
1	01-23-2001	NEW DRAWING	MU3539 I	DRS	REFERENCE DRW.	WAUSAU, WISCONSIN 54401	APPD BY TOM 01-23-2001
REV	DATE	CHANGE	NAME	PART NAME CONNECTION DIAGRAM			DRWG NO A- EE9022PD

SHOP BOOK

PURCHASED

DISTRIBUTION - WA - LB - WP - LM - BR

CADD FILE NO.

EE9022PD

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

/im
-savelevel-