


#16 GRN/YEL GROUND LEAD TO BE 6±1/4 BETWEEN CENTERS OF TERMINALS. TERMINAL TO FIT #10 SCREW

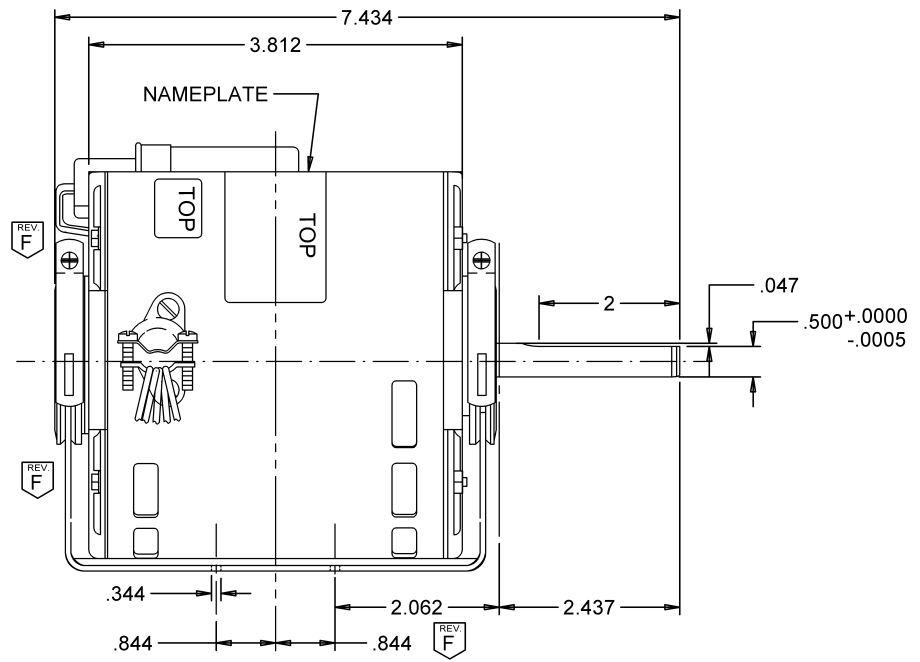


(5) LEADS, #18, .031 THICK INSUL., TO EXTEND BEYOND MOTOR.
 WHITE=36 +3-0, BLACK=36 +3-0
 PURPLE=36 +3-0, ORANGE=36 +3-0
 YELLOW=36 +3-0

CONNECTIONS

115 VOLTS	LI — PUR	230 VOLTS	LI — PUR
	L2 — WHT		L2 — YEL
			INSUL — WHT
			INSUL — ORG
	INSUL — BLK		INSUL — BLK
	INSUL — ORG		

MOTOR IS NON-REVERSIBLE
 CW. ROTATION LEAD END

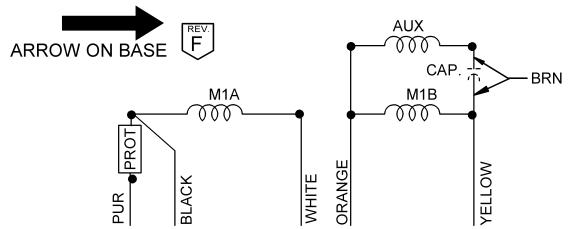

MODEL		REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN			
K48HXWHD-4394		A26428	WHOLESALE-HAC	1/10	115/230	2.7/1.4	60	1550	CW LEAD END	CAT. # 721P			
SHEET NUMBER	REV	REVISION RECORD FOR: C8580-00				INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION				NIDEC MOTOR CORPORATION			
1 OF 1	F	UPDATED DIMENSION ON BASE AND ADDED ARROW ON BASE											
REVISION DATE													
	10-OCT-13					ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN				TITLE	CODE	ITEM NO.	SIZE
ISSUED BY	A. SANCHEZ	REVIEWED BY	B. GAITAN	ENGINEER APPROVED	B. GAITAN	ASSEMBLED VIEW				V01	776484	B	

NIDEC MOTOR CORPORATION 10-Oct-13