


VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	T55CRT-1546	USEM	D12CP2PC	9.940	-----	-----	-----	1/2	115/230	1.25	5.0/2.6	60	1725	-----	NONE	N56C, ODP, STD. 56 BASE

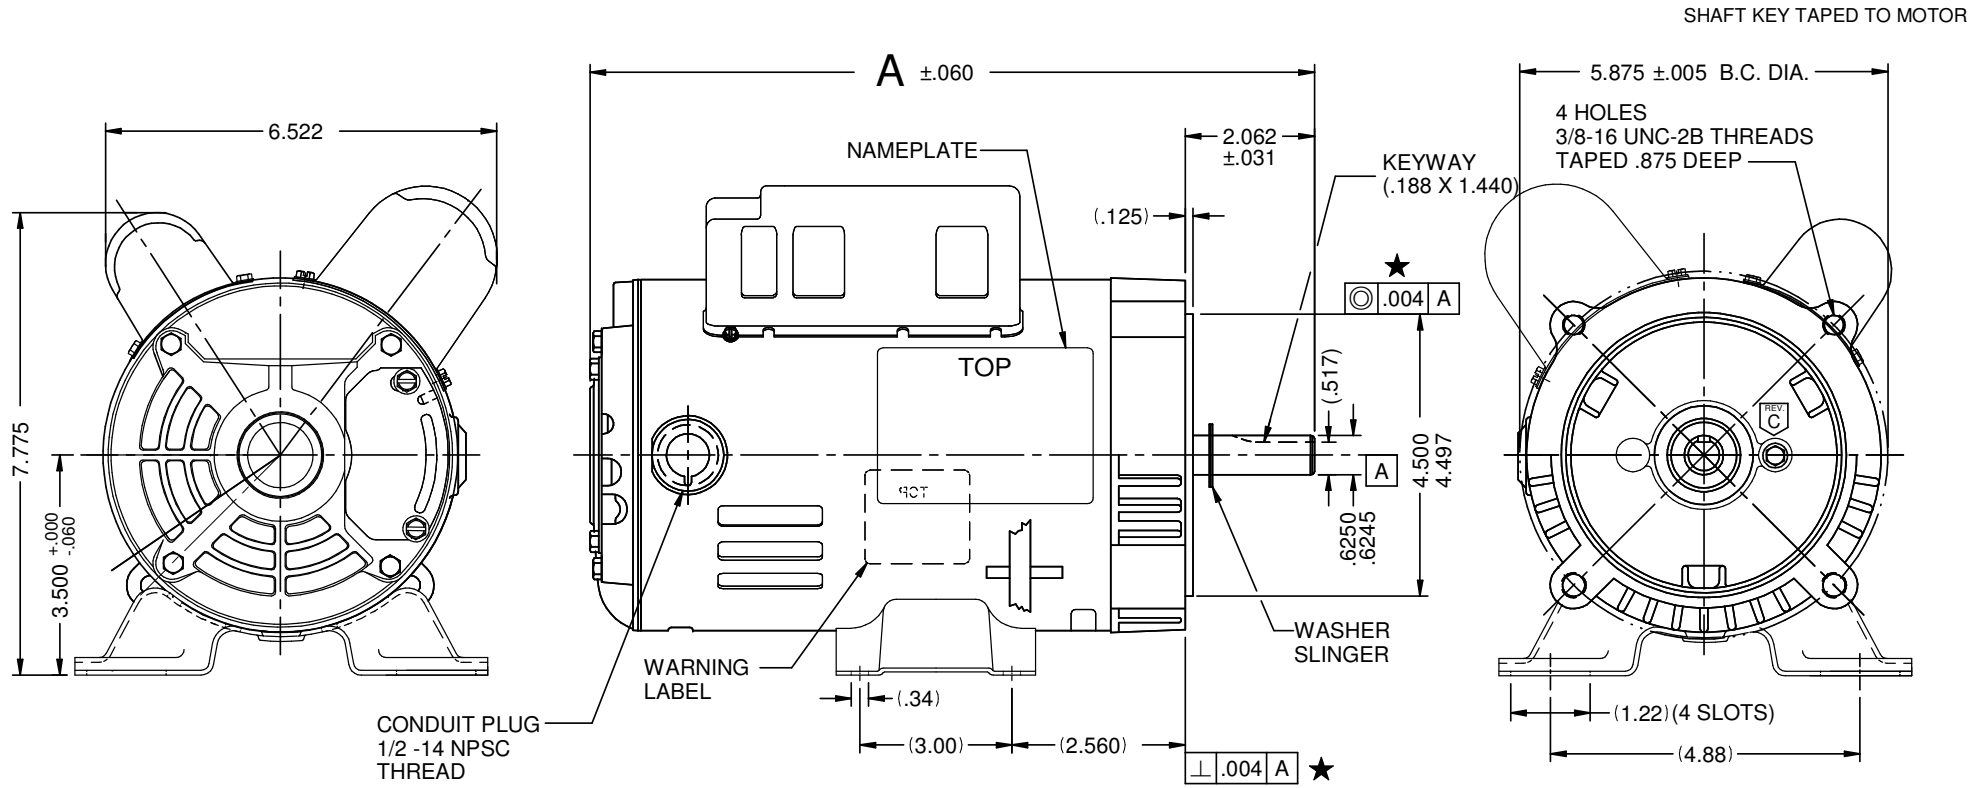

NIDEC MOTOR CORPORATION 03-Oct-18

MOTOR IS CCW ROTATION LEAD END, TO REVERSE INTERCHANGE BLUE WITH WHITE AND ORANGE WITH YELLOW

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR:	ECO: E31480
UPDATED VIEW OF THE HEAD SCREW FOR THE BEARING LOCK, WITHOUT SLOT.	
ISSUED BY:	ENGINEER APPROVED:
R. GUZMAN	J. SALINAS

TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)	
INCHES	mm
.XX = ± 0.010	
.XXX = ± 0.005	
ANGLES X° = $\pm 1^\circ$	

NIDEC MOTOR CORPORATION			
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			
TITLE			REVISION DATE:
CUSTOMER DETAIL DRAWING			03-OCT-18
CODE	ITEM NO.	REV	SHEET NUMBER
V02	804374	C	1 OF 4
DWG SIZE			B