


VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	P063FWN-1347	USEM	D12P2ACR	11.39	--	--	--	1/2	208 - 230/460	1.25	1.98 - 1.9/.98	60	1725	---	NONE	N56C, ODP
002	P063FZF-1354	USEM	D2P2ACR	12.89	--	--	--	2	208 - 230/460	1.15	6.1 - 6.2/3.1	60	1725	---	NONE	N56C, ODP

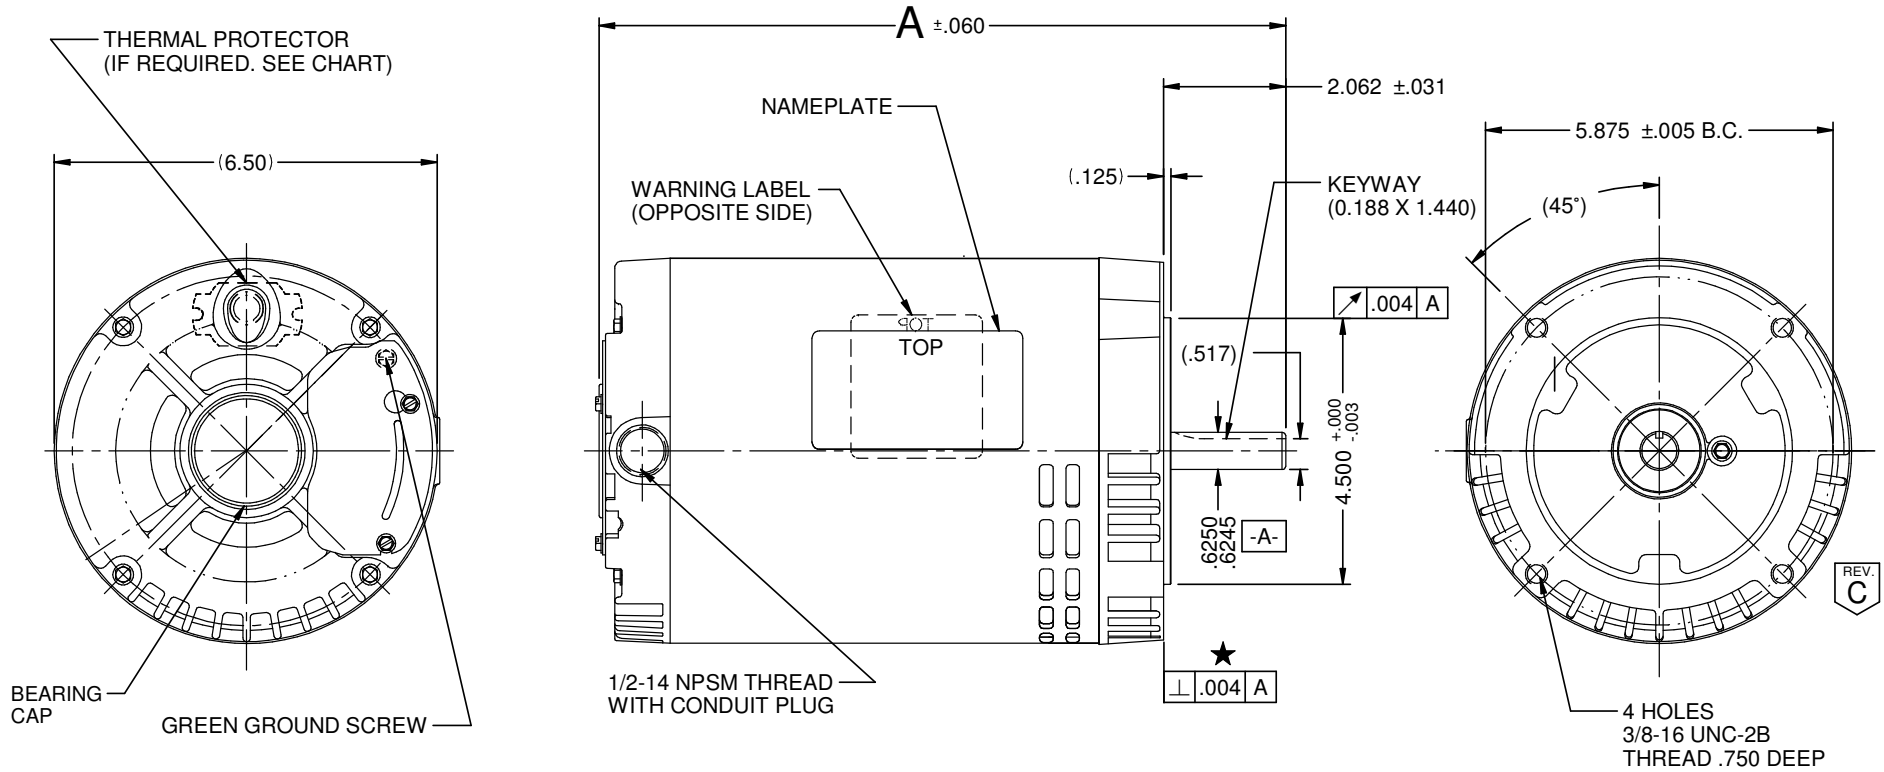

NIDEC MOTOR CORPORATION 23-Jul-18

CCW LEAD END ROTATION REVERSIBLE, TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS.

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: E31416		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		<b>NIDEC MOTOR CORPORATION</b> INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION.				REVISION DATE: 23-JUL-18		
SCREW VIEW WAS UPDATED		INCHES .XX = ± .010 .XXX = ± .005	mm					TITLE: CUSTOMER DETAIL DRAWING		CODE: V02
ISSUED BY: D. VALLE	ENGINEER APPROVED: J. SALINAS	ANGLES X° = ±1°		TITLE: CUSTOMER DETAIL DRAWING		CODE: V02	ITEM NO.: 804533	REV: C	SHEET NUMBER: 1 OF 6	DWG SIZE: B