


VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	P63AHF-1319	USEM	D12P2AH9	11.814	----	----	----	1/2	208-230/460	1.25	1.98-1.9/0.98	60	1725	----	NONE	N56H, ODP
002	P63FWW-1316	USEM	D1P2DH9	12.810	----	----	----	1.0	208-230/460	1.15	3.2-3.0/1.5	60	1725	--	NONE	N56H, ODP
003	P63AHS-1331	USEM	D32P2AH9	13.314	----	----	----	1.5	208-230/460	1.15	5.0-4.8/2.4	60	1725	--	NONE	N56H, ODP
004	P63AJN-1353	USEM	D13P2AH9	11.81	----	----	----	1/3	208-230/460	1.35	1.4-1.4/0.7	60	1725	--	NONE	N56H, ODP
005	P63JZAJR-1357	USEM	D32PA1AH9	12.31	----	----	----	1 1/2	208-230/460	1.15	4.7-4.4/2.2	60	3450	--	AUTO	N56H, ODP

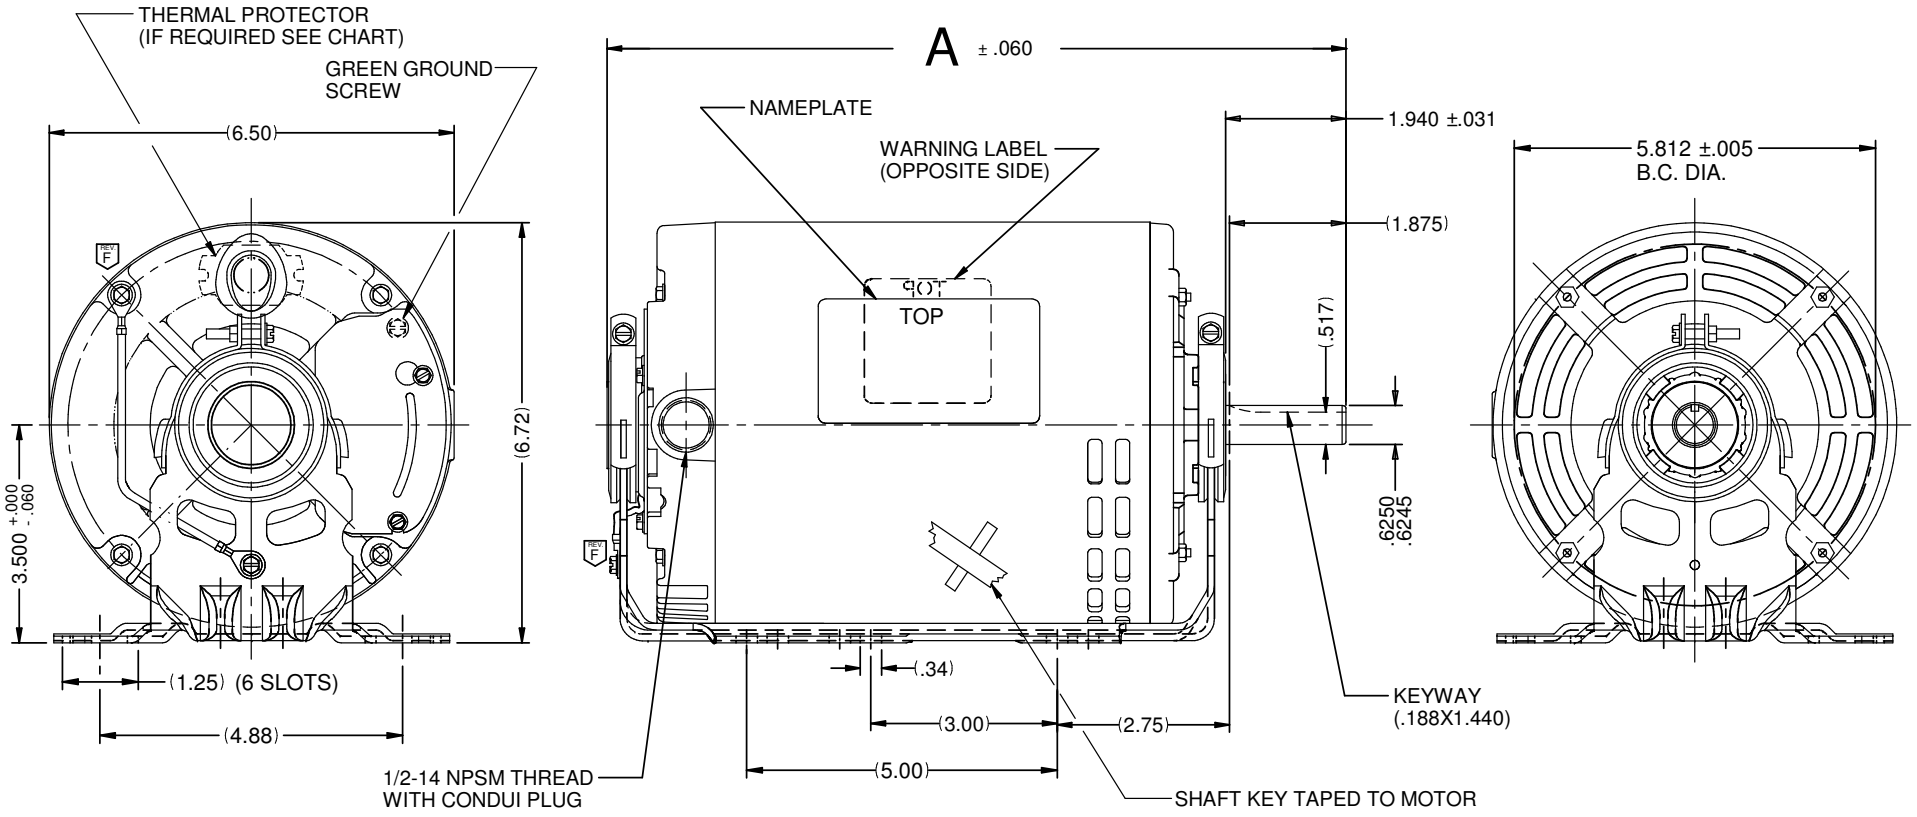

NIDEC MOTOR CORPORATION 16-Mar-18

ROTATION-REVERSIBLE, TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS.

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR:		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		NIDEC MOTOR CORPORATION			REVISION DATE:	
CHANGED VIEW GROUND LEAD TO BEHIND OF THE BASE		ECO E30649		INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			23-MAR-18	
		INCHES .XX ± .010 .XXX ± .005		TITLE			REV	
ISSUED BY: C. LUGO		ENGINEER APPROVED: F. FLORES		CUSTOMER DETAIL DRAWING			SHEET NUMBER	
		ANGLES X° = ±1°		CODE			1 OF 4	
				ITEM NO.			DWG SIZE	
				V02			B	
				803275				