


| VAR | MODEL | CUSTOMER | CAT. NO. | A | B | C | D | HP | VOLTS | SF | AMPS | HZ | RPM | CONN VOLTS | PROT. | DESCRIPTION / REMARKS |
|-----|---------------|----------|------------|--------|-------|-------|-------|-----|---------|------|---------|----|------|------------|-------|-----------------------|
| 001 | T63CXCPG-2169 | USEM | D34CPA2PCR | 11.969 | ----- | ----- | 2.915 | 3/4 | 115/230 | 1.25 | 7.0/3.5 | 60 | 1725 | ----- | AUTO | 56C ODP DRIP COVER |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |

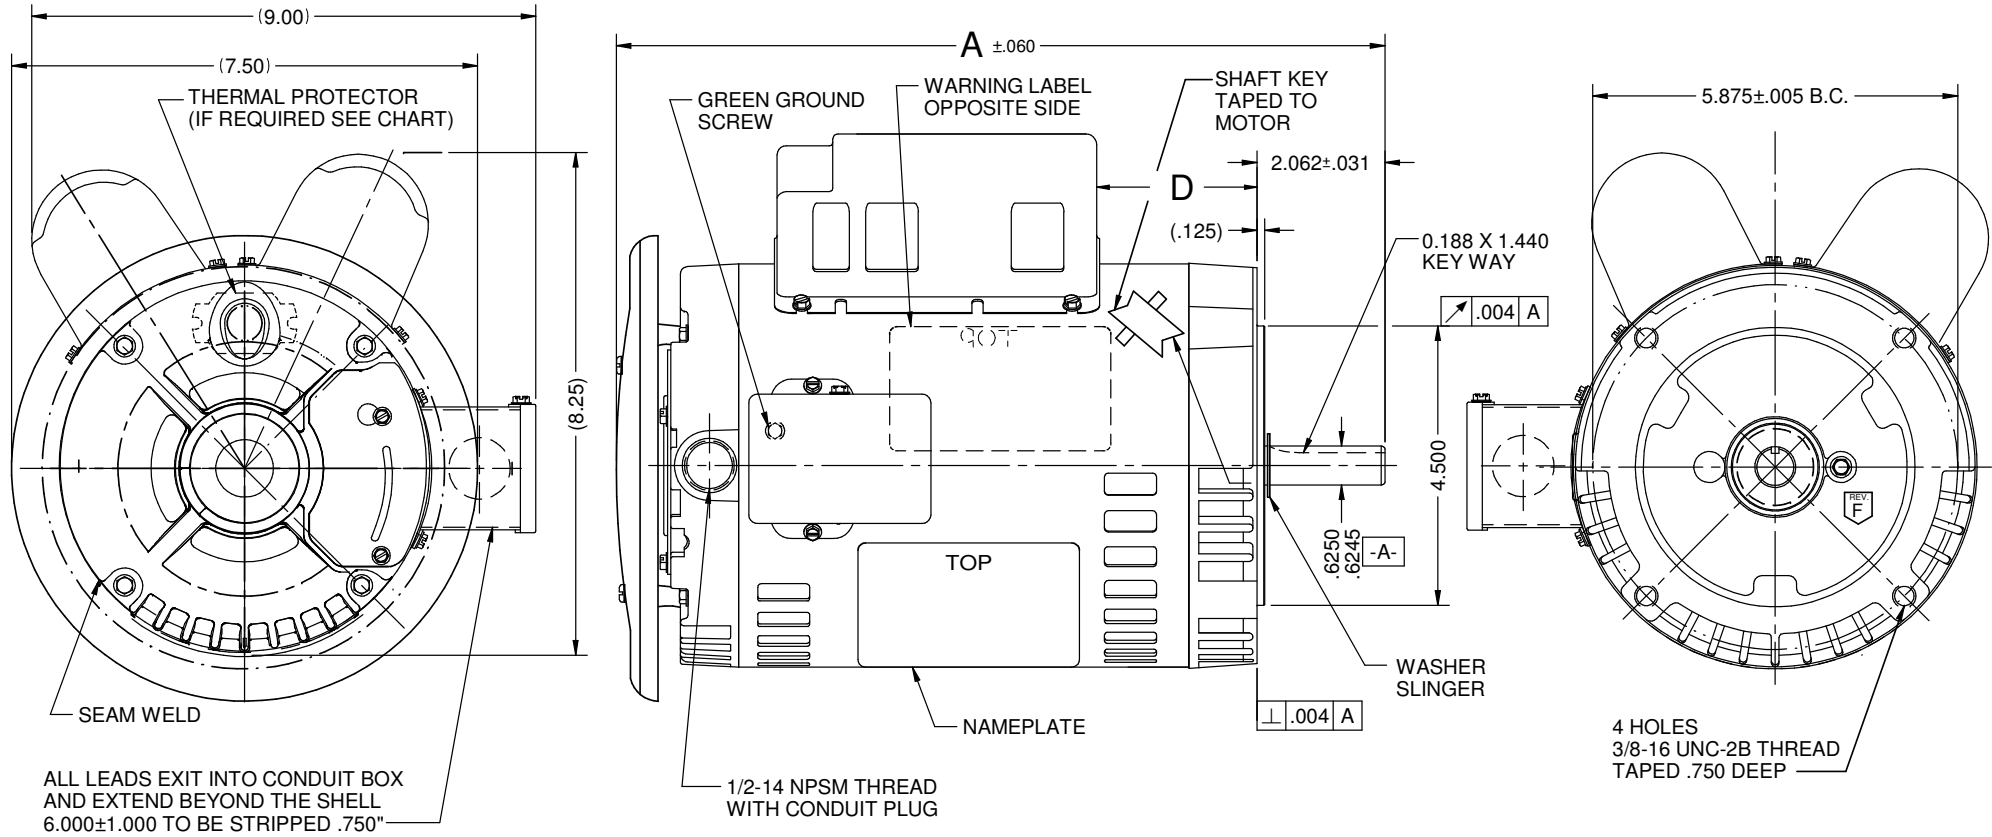

NIDEC MOTOR CORPORATION 08-Oct-18

ROTATION: REVERSIBLE

REFER TO S.E.I.M. 24-1

| | |
|--------------------------------------------------------------------|-------------------------------|
| REVISION RECORD FOR: ECO: E31480 | |
| UPDATED VIEW OF THE HEAD SCREW FOR THE BEARING LOCK, WITHOUT SLOT. | |
| ISSUED BY: R. GUZMAN | ENGINEER APPROVED: J. SALINAS |

| | |
|-------------------------------------------------------|----|
| TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED) | |
| INCHES .XX = ± .010 .XXX = ± .005 | mm |
| ANGLES X° = ± 1° | |

| | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------|--------------|
| NIDEC MOTOR CORPORATION | | | |
| INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION | | | |
| TITLE | | CODE | ITEM NO. |
| CUSTOMER DETAIL DRAWING | | V02 | 803843 |
| REVISION DATE: | | REV | SHEET NUMBER |
| 08-OCT-18 | | F | 1 OF 6 |
| DWG SIZE | | SOLDEDGE | |
| B | | | |