VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	P63AHB-1314	USEM	D34P2AH9	12.310	-----	-----	-----	3/4	208-230/460&190/380	1.25&1.15	2.8-2.7/1.4&3.0/1.5	60&50	1725&1425	-----	NONE	N56H, ODP

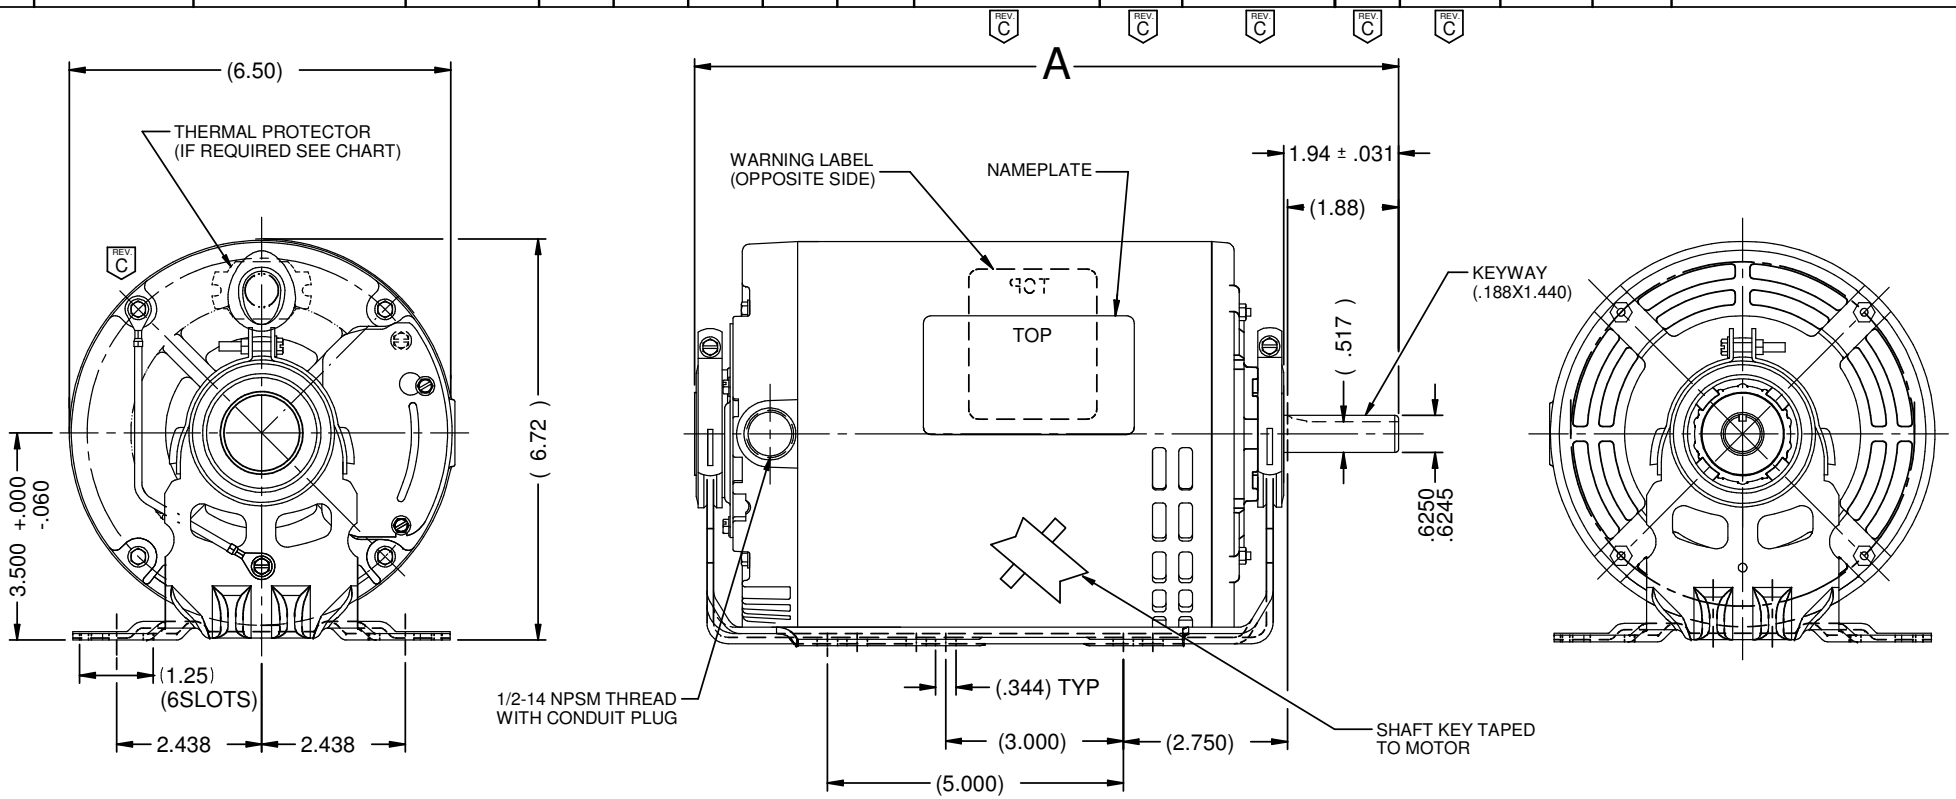

NIDEC MOTOR CORPORATION 08-Dec-17

ROTATION: REVERSIBLE,TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: ECO: E30226

UPDATED VALUES OF CHART PAGE 1 AND 2 AND CHANGED VIEW OF GROUND LEAD FOR BEHIND OF BASE.

ISSUED BY : C. LUGO

ENGINEER APPROVED : T. BOSSALLER

TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)

INCHES	mm
.XX = ± .010 .XXX = ±.005	

ANGLES X°= ±1°

NIDEC MOTOR CORPORATION

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSEDWITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

REVISION DATE : **11-DEC-17**

TITLE	CODE	ITEM NO.	REV	SHEET NUMBER	DWG SIZE
CUSTOMER DETAIL DRAWING	V02	**803303**	**C**	1 OF 4	B